

Specifications


Current Rating: 2Amp
 Insulation Resistance: 1000MΩ Min.
 Dielectric Withstanding: 500V AC
 Contact Resistance: 20mΩ Max.
 Operating Temperature: -40°C to +105°C

Materials

Contact Material: Copper Alloy
 Insulation Material: Polyester, UL 94V-0
 P.B.T
 All materials must be GP materials

Recommended P.C.Board

Hole Layout

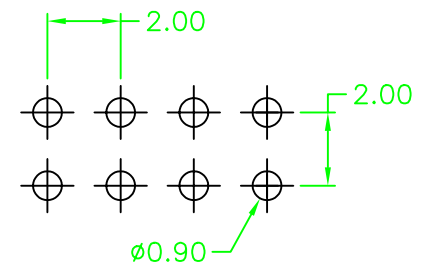

Ordering Information

G PFB201 - XX XX A 01

No. of Pins per Row
02-40

Contact Plating
 01=Tin
 02=Gold Flash Standard
 Duplex Plating
 05=Gold Flash/Tin
 ...

格稜股份有限公司
Greenconn Corporation

REV.	01	UNIT	mm	SCALE	5:1
------	----	------	----	-------	-----

GENERAL TOLERANCE	
X. ± 5°	.X ° ±
X. ± 2°	.X ± 0.38
XX. ± 1°	.XX ± 0.25
XXX. ± 0.5°	.XXX ± 0.13

DRAWN	XIAO PING	DATE	09-08-04'
CHECK		DATE	
APPROVE		DATE	

DWG. NO.	G PFB201-A01
PART NO.	G PFB201- XX XX A01

TITLE	2.00 PIN HEADER DUAL ROWS R/A TYPE BASE 2.00H
-------	---