

1

2

3

4

5

6

7

8

A

A

B

B

C

C

D

D

E

E

F

F

1

2

3

4

5


6

7

8

SPECIFICATION

- 1.Rated Voltage6VDC
- 2.Operating Voltage4~8VDC
- 3.Max.Rated Current30mA at 6VDC
- 4.Resonant Frequency400±100Hz
- 5.Min.Sound Pressure Level.....75dB at 6VDC/20cm
- 6.Case MaterialABS
- 7.Operating Temperature-20~+60℃
- 8.Store Temperature-30~+70℃
- 9.Weight8g

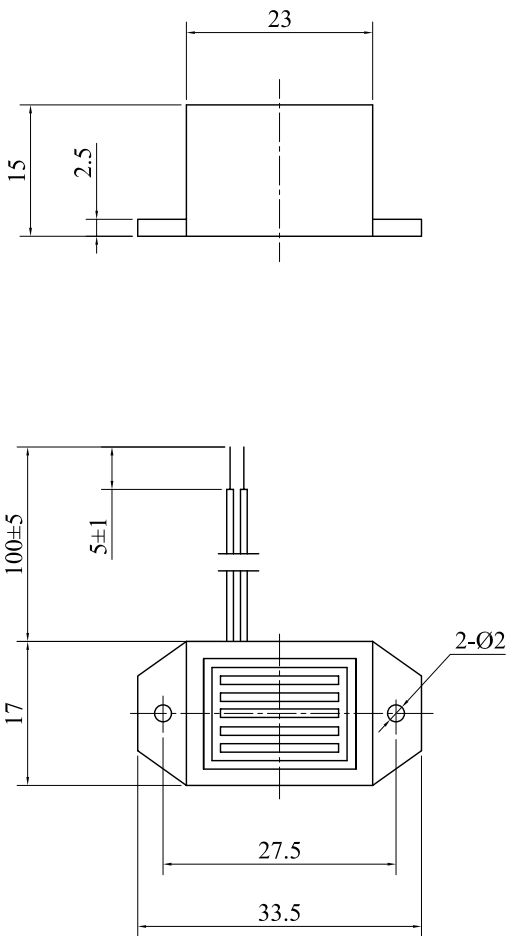

No.		DESCRIPTION		APPROVED	DATE	Magnetic Buzzer	
TOOLERANCES UNLESS NOTED OTHERWISE: X .X ± .XX .1 XXX .01 90° FORMED +2° ANGLES -1°		DRAWN		APPROVALS	DATE	CFGM06	
FIRST ANGLE PROJECTION		CHECKED				UNIT	DWG NO.
APPROVED		APPROVED			03.01.15	mm	840.639
						SCALE	SHEET
							VER 1.0