
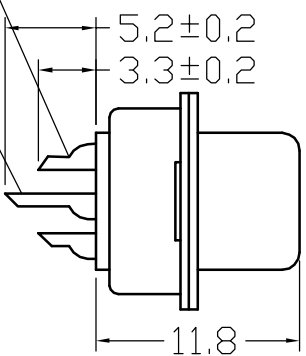
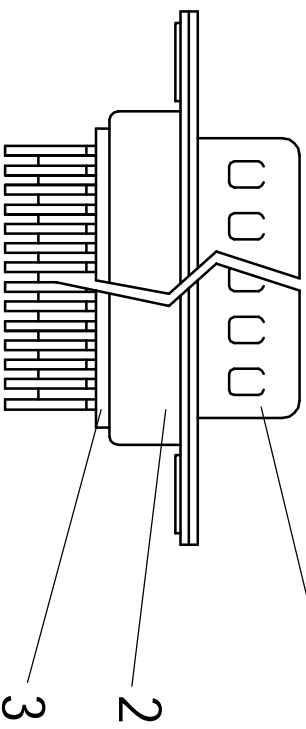


序号/Rev.No.	名称/Title	文件编号/File No.
1	上铁壳	
2	下铁壳	
3	104M塑件	
4	104M端子 (短)	
5	104M端子 (长)	

Specifications:
 Contact Resistance: 30mΩ max. at DC 100 mA
 Insulator resistance: 1000MΩ min. at DC 500V
 Current Rating: 3AMP

Dielectric Withstanding
 Voltage: AC 1000V For 1 minute
 Operating Temperature: -55°C--+105°C
 Contact: Brass
 Housing: PBT &30% Glass Fiber (UL 94V-0)

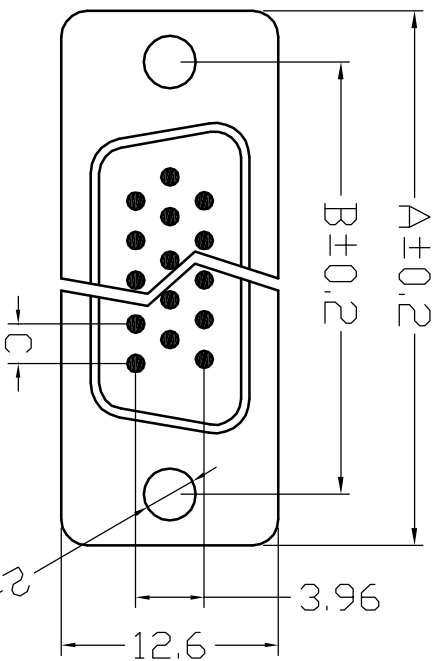

Position	A	B	C
15	30.81	24.99	2.29
26	39.20	33.32	2.29
44	53.10	47.04	2.29
62	69.50	63.50	2.41

设计/Designed by: 绘图/Draw ing by: 审核/Checked by: 批准/Approved by: 未注公差/General Tolerance



104M产品图

XINYA ELECTRONIC CO., LTD

备注/Remark

图名/Title	文件编号/File No.	页序/Sheet	单位/Unit (mm)

序号/Rev.No. 更改记录/Revision note 签名/Signature 日期/Date