

■ SPECIFICATIONS

- Current Rating : 3A AC/DC
- Withstanding Voltage : 1,500V AC/minute
- Insulation Resistance : 500MΩ min
- Temperature Range : -25°C to +85°C
- Contact Resistance : 10 milliohms Max.





■ TERMINAL

- Part No. : JS-6504-TX

① Material: Blank : Phos. Bronze

B : Brass

- Applicable Wires : AWG# 22 - 28
- Finish : Tin Plated
- Thickness : 0.2mm
- Q' ty : 7,000 pcs./Reel

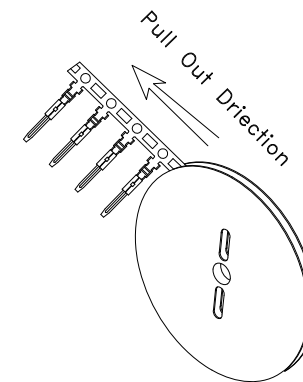

喬訊電子工業股份有限公司  
CHYAO SHIUNN  
ELECTRONIC INDUSTRIAL LTD.

APPROVED BY	SCALE	UNIT	TOLERANCE	LTR	REVISION RECORD	NAME	DATE	LTR	REVISION RECORD	NAME	DATE
Tom Shih		mm	.0 ±0.30	①	產品材質變更	林文彬	2006/12/30	⑧			
CHECKED BY	PROJ	VER NO.	.00 ±0.20	②	合併圖面&修改料號敘述	王誠賢	2011/07/25	⑨			
Tom Shih		a4	.000 ±0.10	③	增加端子捲繞方向圖	吳弘文	2014/10/24	⑩			
DRAWN BY	DATE	SIZE	ANGLE	④	Cancel the gap	Erin	2016/11/08		CUSTOMER		
Erin	2016/11/08	A4	0° ±1°	⑤					Conforms to The RoHS Instruction		
			.0° ±	⑥							
			SHEET 1/1	⑦							

PART NO JS-6504-TX

2.50mm Wire to Wire Connector