


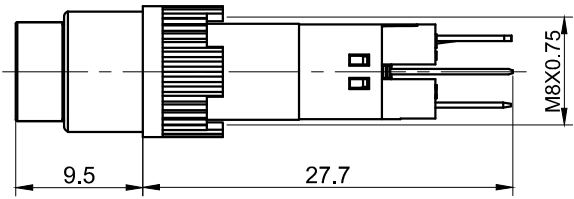




1 2 3 4 5 6 7


FOR 客户名称	APPROVED 客户确认签字	ATTN 销售负责人

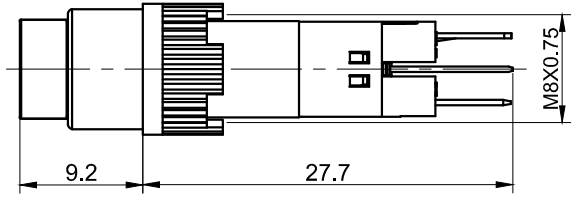


LAS4Y




LAS4F



LAS4J



PANEL CUTOUT
MAX.PANEL THICKNESS
6 mm



Contact Composition

Part Number: LAS4★-11■/△

"★"	Head	"■"	Operation mode	"△"	Cap color
Y	Round	No Letter	Momentary	R	Red
F	Square	Z	Latching	G	Green
J	Rectangular			Y	Yellow
				B	Blue
				W	White

SPECIFICATIONS:

- Switch Max Rating: Ith:3A, Ui:220VAC.
- Switch Rating: 220VAC/0.5A, 110VDC/0.1A.
- Mechanical Life: Momentary ≥200,000cycles;
Latching ≥100,000cycles.
- Electrical Life: ≥50,000cycles.
- Contact Resistance: ≤50mΩ.
- Insulation Resistance: ≥100MΩ.
- Dielectric Strength:
Between terminals of the same pole: AC 1,500V, RMS 50Hz, 1min;
Between terminals of different pole: AC 2,000V, RMS 50Hz, 1min.
- Operating Temperature: -25°C ~ +55°C (No Freezing).
- Operating Force: About 1.4N.
- Operating Travel: About 3mm.
- Terminal Type: Pin Terminal(1.8 x 0.4mm).
- IP Class: IP40.

MATERIALS:

- Contact: Silver alloy.
- Button: PC.
- Body: PC.
- Base: PA

BRAND 品牌 ONPOW	红波按钮制造有限公司 ONPOW PUSH BUTTON MANUFACTURE CO.,LTD.			
	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ONPOW PUSH BUTTON MANUFACTURE CO.,LTD. AND SHALL NOT BE REPRODUCED COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ONPOW PUSH BUTTON MANUFACTURE CO.,LTD.	用途 APPD 审核 CH 2020/04/29	处理 CHKD 校对 NCH 2020/04/29	比例 SCALE 2.2 / 1
DIMENSIONS 0.00 TO 18.00mm ±0.43mm 18.01 TO 30.00mm ±0.52mm 30.01 TO 50.00mm ±0.62mm 50.01 TO 80.00mm ±0.74mm	TOLERANCE ±0.43mm ±0.52mm ±0.62mm ±0.74mm	TITLE 名称 LAS4 Series Pushbutton Switches		制图 DR. ZPD 2020/04/29
DWG NO. 图号 LAS4不带灯			档案名称 FILE NAME LAS4.DWG	张 SHEET 1 / 1
			尺寸 SIZE 图纸 A4	更改 REV. 1

1 2 3 4 5 6 7