
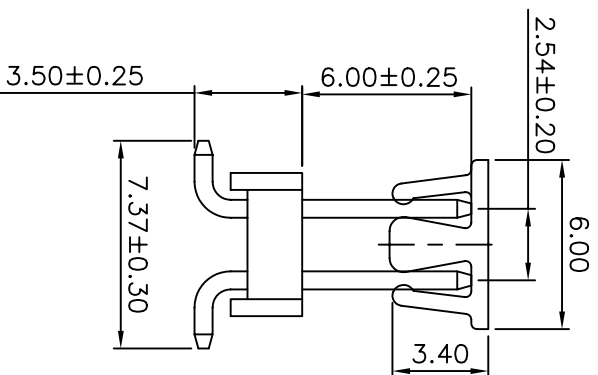
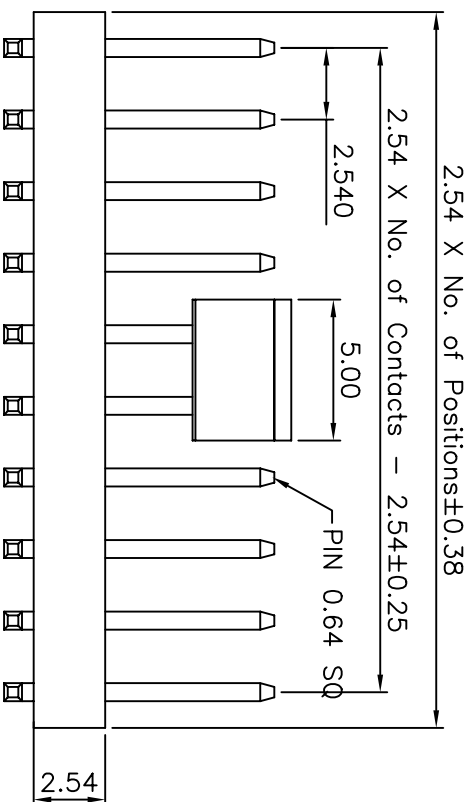



REV.	DESCRIPTION	DATE
△02	增加CAP规格	XIAO PING 06-01-05

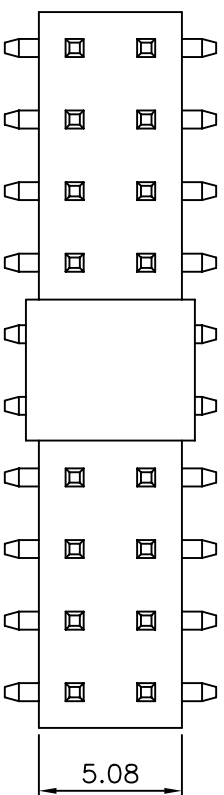

Ordering Information

G PHC201 - XX XX A 02 -X △

No. of Pins per Row 02-40
 Contact Plating
 01=Tin
 02=Gold Flash
 Duplex plating
 05=Gold Flash/tin
 Options
 P=cap
 T=tape reel
 PF=cap+tape reel

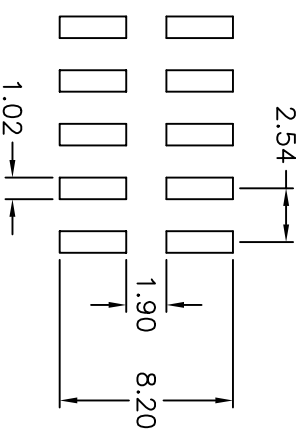

Recommended P.C.Board

Layout

Specifications
 Current Rating: 3Amp
 Insulation Resistance: 1000MΩ Min.
 Dielectric Withstanding: 600VAC
 Contact Resistance: 20mΩ Max.
 Operating Temperature: -40°C to +105°C

Materials
 Contact Material: Copper alloy
 Insulator Material: Polyester, UL94V-0
 NYLON-6T
 All materials must be GP materials

格稜股份有限公司
Greenconn Corporation

GENERAL TOLERANCE	
X ± 5°	K ±
X ± 2°	X ± 0.38
XX ± 1°	XX ± 0.25
.XXX ± 0.5°	.XXX ± 0.13

DESIGN:	XIAO PING	DATE:	06-01-05
CHECKED:		DATE:	
AUDITED:		DATE:	
APPROVED:		DATE:	

DWG. NO.	G PHC201-A02
PART NO.	G PHC201-XX XX A 02-X

TITLE:	2.54 PIN HEADER DUAL ROWS SMT TYPE BASE 2.54H
--------	---

REV.	UNIT:	SCALE:	SYMBOL
02	mm	4:1	⊕