

# CERAMIC RESONATOR

ZTTCC Series with Built-IN Capacitor SMD type

---



Approved by:
Checked by:
Issued by:

# SPECIFICATION

PN: ZTTCC6.00MG

深圳市晶科鑫实业有限公司  
SHENZHEN CRYSTAL TECHNOLOGY INDUSTRIAL CO., LTD.

Add: RM#:1805East Wing,TianAn Hi-tech Plaza Phase2,TianAn Cyber Park, Shenzhen, China  
Tel: (86) 755 88352809 88352810 Fax: (86) 755 88353718 88352499  
E-mail: [sjk@q-crystal.com](mailto:sjk@q-crystal.com) HTTP://[www.q-crystal.com](http://www.q-crystal.com)

# CERAMIC RESONATOR

ZTTCC Series with Built-IN Capacitor SMD type



## 1.SCOPE

This specification shall cover the characteristics of the ceramic resonator with the type **ZTTCC6.00MG**

## 2. ELECTRICAL SPECIFICATIONS

### 2.1 RATING

Items	Requirement
Withstanding Voltage (V)	50 (DC, 1min)
Insulation Resistance $R_i$ , ( $M\Omega$ ) min.	100 (10V, 1min)
Operating temperature	-40°C ~ +120°C
Storage temperature	-55°C ~ +120°C
Rating Voltage $U_R$ (V)	6V DC
	15V p-p

### 2.2 ELECTRICAL SPECIFICATIONS

Items	Requirement
Oscillation Frequency $F_{osc}$ (MHz)	6.000
Frequency Accuracy (%)	±0.5
Resonant Impedance $R_o$ ( $\Omega$ ) max.	30
Temperature Coefficient of Oscillation Frequency (%) max.	±0.3 (Oscillation Frequency drift, -40°C ~ +120°C)
Oscillation Frequency Aging Rate (%) max *1	±0.3 (From initial value)

\* Components shall be left in a chamber of +85±2°C for 1000 hours, then measured after leaving in natural condition for 1 hours.

## 3. OUTLINE DIMENSIONS AND MARK

3.1 Appearance: No visible damage and dirt.

3.2 Construction: SMD ceramic packaging.

3.3 The products conform to the RoHS directive and national environment protection law.


Add: RM#:1805East Wing,TianAn Hi-tech Plaza Phase2,TianAn Cyber Park, Shenzhen, China  
Tel: (86) 755 88352809 88352810 Fax: (86) 755 88353718 88352499  
E-mail: [sjk@q-crystal.com](mailto:sjk@q-crystal.com) HTTP://[www.q-crystal.com](http://www.q-crystal.com)



# CERAMIC RESONATOR

ZTTC Series with Built-IN Capacitor SMD type

## 3.4 Dimensions and mark

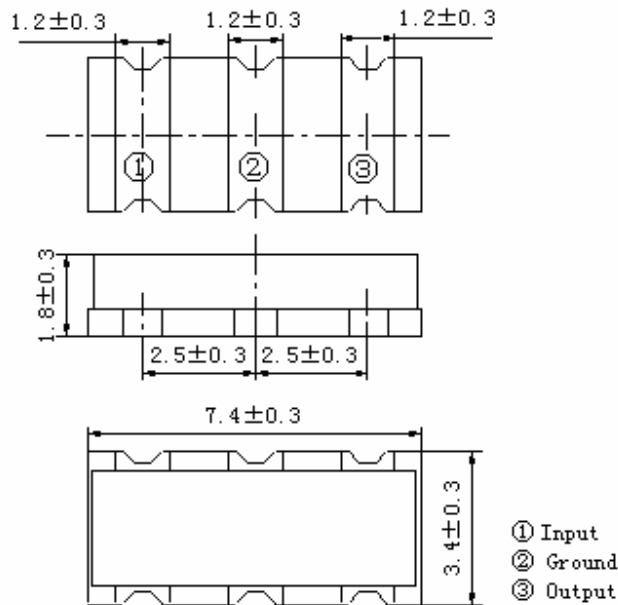


## 4. TEST

### 4.1 Test Conditions

Parts shall be tested under the condition ( Temp.:  $20\pm 15^{\circ}\text{C}$ , Humidity :  $65\pm 20\%$  R.H.) unless the standard condition (Temp.:  $25\pm 3^{\circ}\text{C}$ , Humidity :  $65\pm 10\%$  R.H.) is regulated to measure

### 4.2 Test Circuit

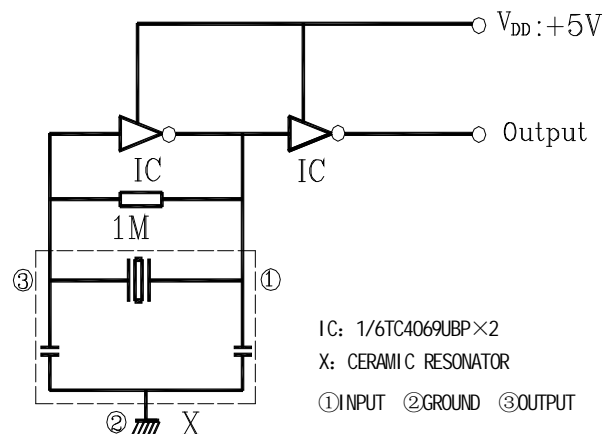

## 5. PHYSICAL AND EN

Add: RM#:1805East Wing, TianAn Hi-tech Plaza Phase2, TianAn Cyber Park, Shenzhen, China  
Tel: (86) 755 88352809 88352810 Fax: (86) 755 88353718 88352499  
E-mail: [sjk@q-crystal.com](mailto:sjk@q-crystal.com) HTTP://[www.q-crystal.com](http://www.q-crystal.com)

# CERAMIC RESONATOR




ZTTC Series with Built-IN Capacitor SMD type

No	Item	Condition of Test	Performance Requirements						
5.1	Humidity	Keep the resonator at $40^{\circ}\text{C}\pm 2^{\circ}\text{C}$ and 90%-95% RH for 96h. Then Release the resonator into the room Condition for 1h prior to the Measurement.	It shall fulfill the specifications in Table 1.						
5.2	High Temperature Exposure	Subject the resonator to $120^{\circ}\text{C}\pm 2^{\circ}\text{C}$ for 96h, then release the resonator into the room conditions for 1h prior to the measurement.	It shall fulfill the specifications in Table 1.						
5.3	Low Temperature Exposure	Subject the resonator to $-55^{\circ}\text{C}\pm 2^{\circ}\text{C}$ for 96h, then release the resonator into the room conditions for 1h prior to the measurement.	It shall fulfill the specifications in Table 1.						
5.4	Temperature Cycling	After temperature cycling of blow table was performed 5 times, resonator shall be measured after being placed in natural conditions for 1h.	It shall fulfill the specifications in Table 1.						
		<table border="1"> <thead> <tr> <th>Temperature</th> <th>Time</th> </tr> </thead> <tbody> <tr> <td><math>-40\pm 3^{\circ}\text{C}</math></td> <td><math>30\pm 3</math> min</td> </tr> <tr> <td><math>120\pm 3^{\circ}\text{C}</math></td> <td><math>30\pm 3</math> min</td> </tr> </tbody> </table>		Temperature	Time	$-40\pm 3^{\circ}\text{C}$	$30\pm 3$ min	$120\pm 3^{\circ}\text{C}$	$30\pm 3$ min
		Temperature		Time					
$-40\pm 3^{\circ}\text{C}$	$30\pm 3$ min								
$120\pm 3^{\circ}\text{C}$	$30\pm 3$ min								
5.5	Vibration	Subject the resonator to vibration for 2h each in x、 y and z axis With the amplitude of 1.5mm, the frequency shall be varied uniformly between the limits of 10 Hz—55Hz.	It shall fulfill the specifications in Table 1.						
5.6	Mechanical Shock	Drop the resonator randomly onto a wooden floor from the height of 100cm 3 times.	It shall fulfill the specifications in Table 1.						
5.7	Soldering Test	Passed through the re-flow oven under the following condition and left at room temperature for 1h before measurement.	It shall fulfill the specifications						

Add: RM#:1805East Wing,TianAn Hi-tech Plaza Phase2,TianAn Cyber Park, Shenzhen, China  
 Tel: (86) 755 88352809 88352810 Fax: (86) 755 88353718 88352499  
 E-mail: [sjk@q-crystal.com](mailto:sjk@q-crystal.com) HTTP://[www.q-crystal.com](http://www.q-crystal.com)

# CERAMIC RESONATOR

ZTTC Series with Built-IN Capacitor SMD type

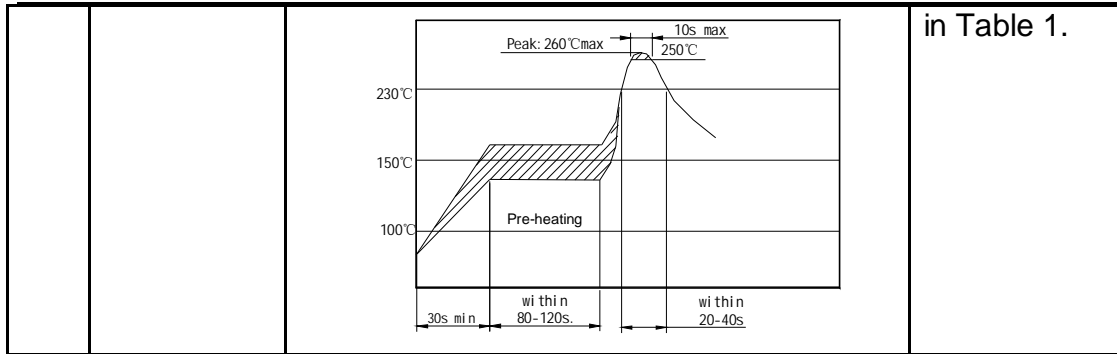

5.8	Solder Ability	Dipped in 245°C±5°C solder bath for 3s±0.5 s with rosin flux (25wt% ethanol solution.)	The terminals shall be at least 95% covered by solder.
5.9	Board Bending	<p>Mount a glass-epoxy board (Width=40mm,thickness=1.6mm),then bend it to 1mm displacement and keep it for 5s. (See the following figure)</p>	Mechanical damage such as breaks shall not occur.

**Table 1**

Item	Specification after test
Oscillation Frequency Change $\Delta F_{osc}/F_{osc}$ (%) max	±0.3
Resonant Impedance ( $\Omega$ ) max	35
The limits in the above table are referenced to the initial measurements.	

Add: RM#:1805East Wing,TianAn Hi-tech Plaza Phase2,TianAn Cyber Park, Shenzhen, China  
 Tel: (86) 755 88352809 88352810 Fax: (86) 755 88353718 88352499  
 E-mail: [sjk@q-crystal.com](mailto:sjk@q-crystal.com) HTTP://[www.q-crystal.com](http://www.q-crystal.com)


# CERAMIC RESONATOR

ZTTC Series with Built-IN Capacitor SMD type



## 6. RECOMMENDED LAND PATTERN AND REFLOW SOLDERING STANDARD CONDITIONS

### 6.1 Recommended land pattern

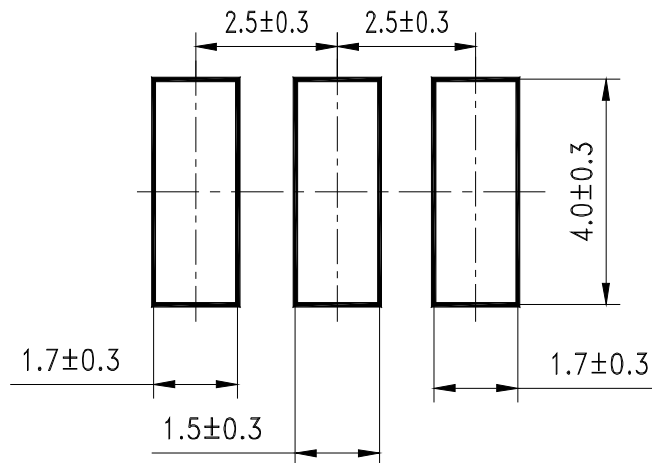


### 6.2 Recommended reflow soldering standard conditions

Add: RM#:1805East Wing,TianAn Hi-tech Plaza Phase2,TianAn Cyber Park, Shenzhen, China  
Tel: (86) 755 88352809 88352810 Fax: (86) 755 88353718 88352499  
E-mail: [sjk@q-crystal.com](mailto:sjk@q-crystal.com) HTTP://[www.q-crystal.com](http://www.q-crystal.com)

# CERAMIC RESONATOR

ZTTC Series with Built-IN Capacitor SMD type

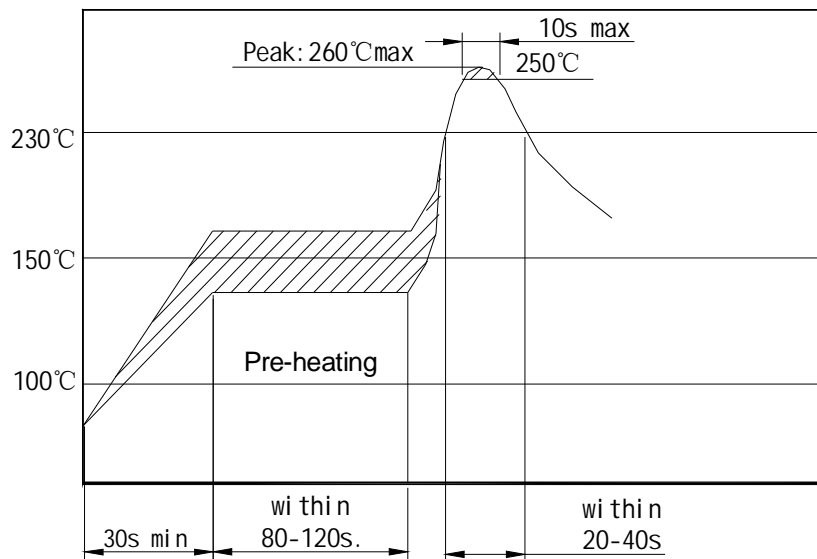

## 7. PACKAGE

### 7.1. Section of package

Package is made of corrugated paper with thickness of 0.8cm. Package has 10 inner boxes, each box has 1 reel (each reel for plastic bag)

### 7.2 Quantity of package


Per plastic reel	4000 pieces of piezoelectric ceramic part
Per inner box	1 reel
Per package	10 inner boxes (40000 pieces of piezoelectric ceramic part)

### 7.3 Inner Box Dimensions

Add: RM#:1805East Wing, TianAn Hi-tech Plaza Phase2, TianAn Cyber Park, Shenzhen, China  
Tel: (86) 755 88352809 88352810 Fax: (86) 755 88353718 88352499  
E-mail: [sjk@q-crystal.com](mailto:sjk@q-crystal.com) HTTP://[www.q-crystal.com](http://www.q-crystal.com)

# CERAMIC RESONATOR

ZTTCC Series with Built-IN Capacitor SMD type

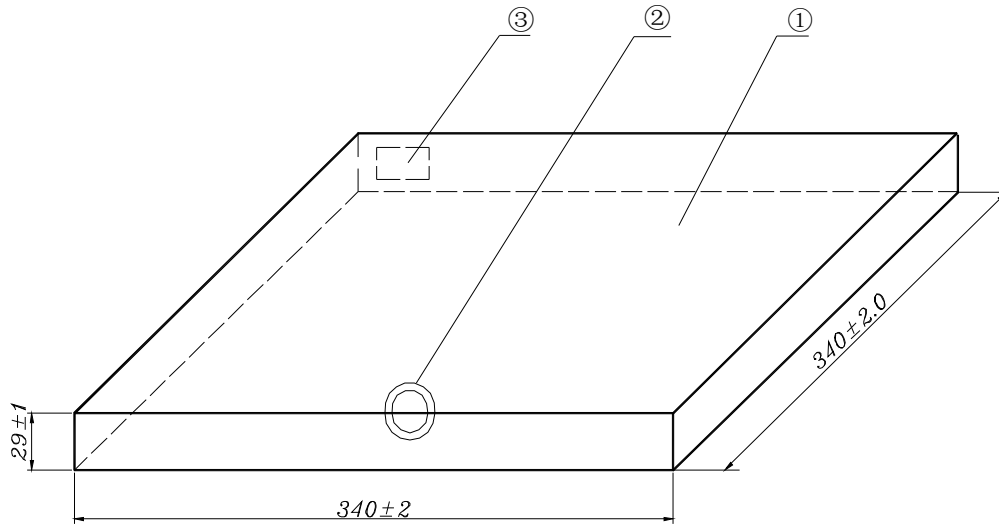

NO.	Name	Quantity
①	Inner Box	1
②	QC Label	1
③	Label	1


## 7.4 Reel Dimensions

Add: RM#:1805East Wing,TianAn Hi-tech Plaza Phase2,TianAn Cyber Park, Shenzhen, China  
Tel: (86) 755 88352809 88352810 Fax: (86) 755 88353718 88352499  
E-mail: [sjk@q-crystal.com](mailto:sjk@q-crystal.com) HTTP://[www.q-crystal.com](http://www.q-crystal.com)




# CERAMIC RESONATOR

ZTTC Series with Built-IN Capacitor SMD type

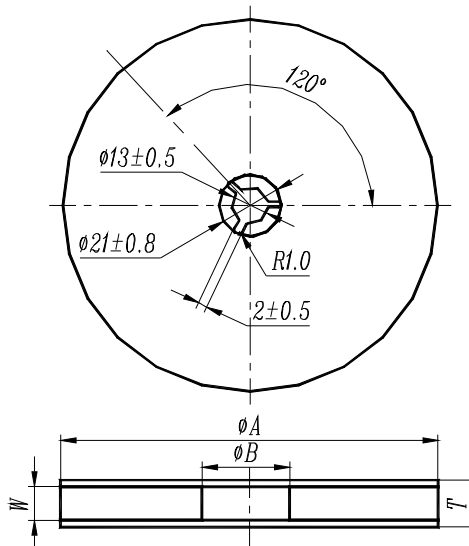


$\phi A$	$\phi B$	W	T	Pieces per reel	Carrier tape size
330±3	80min	16.4min	22.4max	4000typ.	16

## 7.5 Packing Method Sketch Map

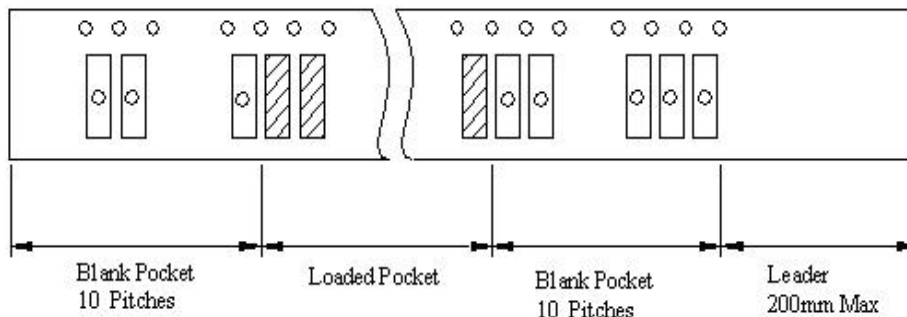

## 7.6 Test Condition Of Peeling Strength

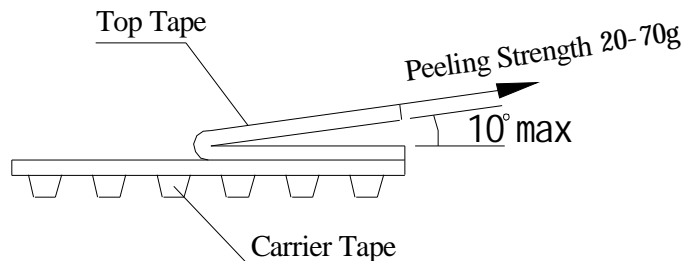

## 8. OTHER

Add: RM#:1805East Wing, TianAn Hi-tech Plaza Phase2, TianAn Cyber Park, Shenzhen, China  
 Tel: (86) 755 88352809 88352810 Fax: (86) 755 88353718 88352499  
 E-mail: [sjk@q-crystal.com](mailto:sjk@q-crystal.com) HTTP://[www.q-crystal.com](http://www.q-crystal.com)

# CERAMIC RESONATOR



## *ZTTC Series with Built-IN Capacitor SMD type*

---

### 8.1 Caution

8.1.1 Don't apply excess mechanical stress to the component and terminals at soldering. Do not use this product with bend.

8.1.2 Do not clean or wash the component for it is not hermetically sealed.

8.1.3 Do not use strong acidity flux, more than 0.2wt% chlorine content, in flow soldering.

8.1.4 Don't be close to fire.

8.1.5 This specification mentions the quality of the component as a single unit.

Please insure the component is thoroughly evaluated in your application circuit

8.1.6 Expire date (Shelf life) of the products is six months after delivery under the conditions of a sealed and an unopened package. Please use the products within six months after delivery. If you store the products for a long time (more than six months), use carefully because the products may be degraded in the solderability or rusty.

Please confirm solderability and characteristics for the products regularly.

8.1.7 Please contact us before using the product as automobile electronic component.

### 8.2 Notice

8.2.1 Please return one of these specifications after your signature of acceptance.

8.2.2 When something gets doubtful with this specification, we shall jointly work to get an agreement

Add: RM#:1805East Wing,TianAn Hi-tech Plaza Phase2,TianAn Cyber Park, Shenzhen, China  
Tel: (86) 755 88352809 88352810 Fax: (86) 755 88353718 88352499  
E-mail: [sjk@q-crystal.com](mailto:sjk@q-crystal.com) HTTP://[www.q-crystal.com](http://www.q-crystal.com)