


电气原理图/Circuit:



技术参数/Specifications	
额定参数/Rating	15A 250VAC
环境温度/Environment Temperature	-25℃ ~ 85℃
接触电阻 Contact Resistance	≤ 30mΩ
绝缘电阻/Insulation Resistance	≥ 100MΩ (at 500VDC)
电阻/Resistance	
引脚-引脚 Terminal-Terminal	1500V AC/10mA/5S
耐电压 Withstand Voltage	3000V AC/10mA/5S
电气寿命 Electrical life	10000 Cycles
操作力 Operating Force	4N ~ 7N

Mounting/安装尺寸:

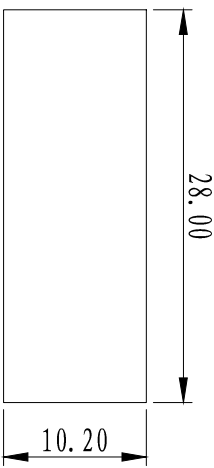

X: 安装面板厚度

X: Panel Thickness: 1.5mm

NOTE:
TOLERANCE UNLESS OTHERWISE SPECIFIED
X. ± 0.20 . X ± 0.15 . XX ± 0.10

准(通)用符号表 MARKING GENERAL SYMBOL TABLE
图例符号 MARKING SYMBOL TABLE
日期 DATE
签名 SIGNATURE

设计 DESIGN	校核 CHECK	审核 REVIEW	批准 APPROVE
设计号 DRAWING NO.	校核号 CHECK NO.	审核号 REVIEW NO.	批准号 APPROVE NO.
设计日期 DATE	校核日期 DATE	审核日期 DATE	批准日期 DATE

成品图
Product Drawing

投影 PROJECTION	版本 REV	重量 WT	比例 SCALE	船形开关 Rocker Switch
共1页 THE 1 PAGE	A0	2:1 (A4)		
浙江佳龙电子有限公司 ZHEJIANG JIALONG ELECTRON CO., LTD				11-KCD3-102C