


Specifications
 Current Rating: 2Amp
 Insulation Resistance: 1000MΩ Min.
 Dielectric Withstanding: 500V AC
 Contact Resistance: 20mΩ Max.
 Operating Temperature: -40°C to +105°C

Materials
 Contact Material: Phosphor Bronze
 Insulation Material: Polyester, UL 94V-0 Nylon-6T

All materials must be GP materials

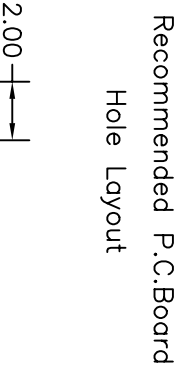

Ordering Information

G SFA201 - XX XX A 01

No. of Pins per Row
 02-40

Contact Plating
 01=Tin
 02=Gold Flash
 Duplex plating
 05=Gold Flash /Tin
 ...

格 菱 股 份 有 限 公 司
Greenconn Corporation

REV.	UNIT	SCALE	SYMBOL
01	mm	5=1	

GENERAL TOLERANCE	
X.* ± 5°	.X.* ±
X. ± 2°	.X. ± 0.38
XX. ± 1°	.XX. ± 0.25
XXX. ± 0.5°	.XXX. ± 0.13

DRAWN	DATE
C-T-Kang	11-20-97
CHECK	DATE
APPROVE	DATE

DWG. NO.	PART NO.
G SFA201-A01	G SFA201- XX XX A 01

TITLE
 2.00 FEAMLE HEADER
 DUAL ROW DIP TYPE
 BASE 4.30