





**SPECIFICATIONS**

Rated Current:1.5AMP  
 Contact Resistance:20mΩ Max  
 Withstand Voltage:500V AC/DC  
 Insulation Resistance:1000MΩ Min  
 Operation Temperature:-40°C to +105°C

Contact Material:Brass  
 Contact Plating:Au or Sn Over Ni  
 Insulator Material:Polyester(UL94V-0)  
 Standard: PA6T  
 Max.Processing Temp: 230°C for 30-60 seconds  
 (260°C for 5 seconds)

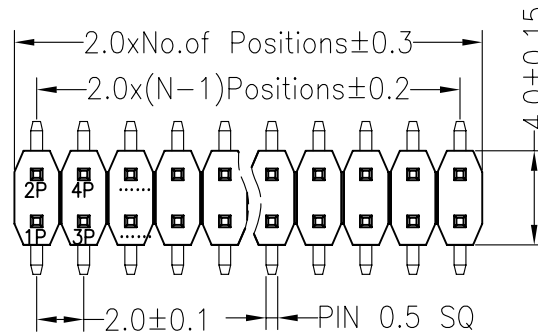

**Recommended P.C.B Layout(Top Side)**  
 (PCB BOARD TOLERANCE  $\pm 0.05$ )

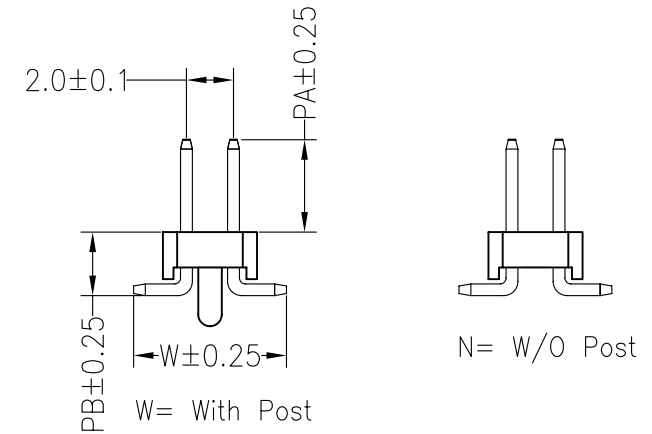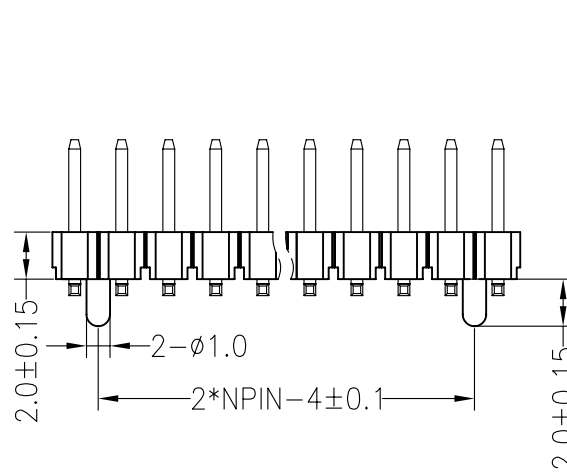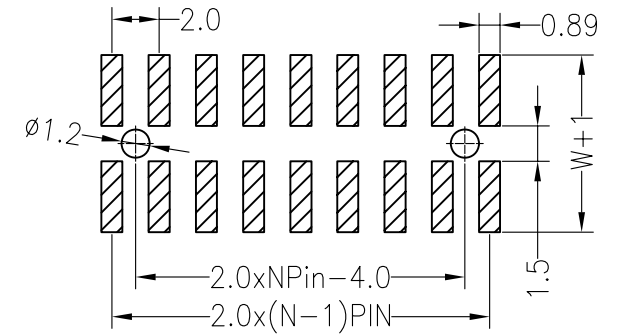

N= W/O Post

Dimension antitheses list				
ITEM	PA	PB	W	L
Standard	3.80	2.50	6.50	8.00
Alternate	4.00	2.60	6.40	8.20

				OPERATION		DRAW	YiYuSheng	12.04.11	SCALE	FIT	<b>Conntherm</b>			
				X.X	$\pm 0.30$				UNIT	mm				
				X.XX	$\pm 0.20$	CHECK	SIZE	A4	PART NO.	TITLE: 2.0PH 2xNpin H2.0MM SMT				
A0	2012.04.11	NEW DRAWING		X.XXX	$\pm 0.10$		SHEET	1/1						
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM	TOL	APPROVE	PROJ.	$\phi$	$\square$					
1	2	3	4	5	6	7	8	9						