

Datasheet

2.5" SATA SSD

3MG2-P series

- 2.5" SATA III solution for industrial field
- 7mm height mechanical design
- High IOPS
- Intelligent error recovery system
- iSMART disk health monitoring
- iData Guard for abnormal power failure
- iCell technology for data protection (optional)
- DEVSLP supported



Introduction

Innodisk 2.5" SATA SSD 3MG2-P is SATA III 6Gb/s flash based disk, which delivers excellent performance, especially in random data transfer rate, and which offers reliability making it the ideal solution for a variety of applications, including embedded system, industrial computing, and enterprise field. 3MG2-P 2.5" SSD not only performs unmatched performance, but also designed with Innodisk owned technical knowhow to ensure the data integrity and highest levels of reliability. Additionally, 3MG2-P SATA SSD can support device sleep mode (DEVSLP) and thus be able to benefit in extreme low power consumption.


2.5" SATA SSD

3MG2-P series

Contact us for more information
about the 2.5" SATA SSD 3MG2-P

Innodisk is a service-driven provider of industrial embedded flash and DRAM storage products and technologies, with a focus on the industrial/embedded, aerospace and defense, and cloud computing industries.

Drawing

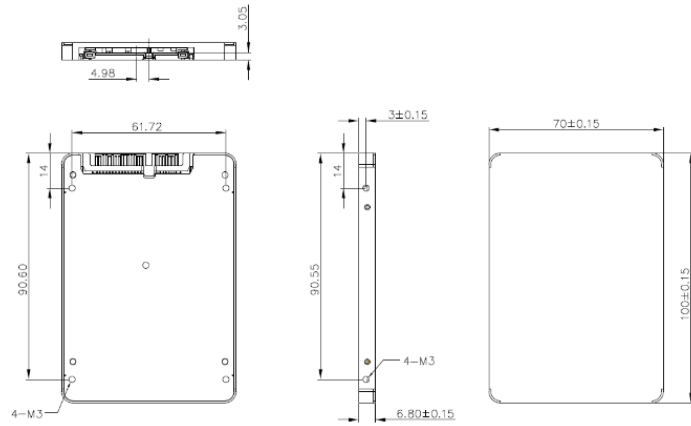

Specifications

(Preliminary specifications subject to change)

Interface	SATA III
Flash Type	MLC
Flash P/E Cycle Limit	3,000
Capacity	8GB~1TB
Max. Channels	4
Sequential R/W (MB/sec, max.)*	530 / 460 MB/s
4KB Random (QD32) R/W (IOPS)**	70,000/25,000
Max. Power Consumption	5 W (5V x 1A)
Thermal Sensor	✓
External DRAM Buffer	✓
H/W Write Protect	-
ATA Security	✓
S.M.A.R.T.	✓
DEVSPLP Mode	✓ (min. power consumption 3mW)
Slumber Mode	✓ (min. power consumption 30mW)
Dimension (WxLxH)	70.0 X 100.0 X 6.8 mm
Environment	Vibration: 20G @7~2000Hz Shock: 1500G @ 0.5ms Storage Temperature: -55°C ~ +95°C MTBF: 3 million hours
* Sequential performance based on CrystalDiskMark 3.01 with file size 1000MB	
* * Random performance based on IOMeter with Queue Depth 32	

Headquarters (Taiwan)

5F., No.237, Sec. 1, Datong Rd.,
Xizhi Dist., New Taipei City,
Taiwan (R.O.C.)
Tel: +886-2-77033000
Email: sales@innodisk.com

Branch Offices:

USA
usasales@innodisk.com
+1-510-770-9421
Europe
eusales@innodisk.com
+31-(0)40-282-1818
Japan
jpsales@innodisk.com
+81-45-594-7581
China
sales_cn@innodisk.com
+86-755-21673689
www.innodisk.com

© 2014 Innodisk Corporation.
All right reserved. Specifications
are subject to change without
prior notice.

20140703

Ordering Information

Operation Temp.	8GB	16GB	32GB	64GB	128GB	256GB	512GB	1TB
Standard Grade (0°C ~ +70°C)	DGS25-08GD81SC3SC(P)	DGS25-16GD81SC3DC(P)	DGS25-32GD81SC3QC(P)	DGS25-64GD81SC1QC(P)	DGS25-A28D81SC1QC(P)	DGS25-B56D81SC1QC(P)	DGS25-C12D81SC1QC(P)	DGS25-01TD81SCAQC(P)
Industrial Grade (-40°C ~ +85°C)	DGS25-08GD81SW3SC(P)	DGS25-16GD81SW3DC(P)	DGS25-32GD81SW3QC(P)	DGS25-64GD81SW1QC(P)	DGS25-A28D81SW1QC(P)	DGS25-B56D81SW1QC(P)	DGS25-C12D81SW1QC(P)	DGS25-01TD81SWAQC(P)

innodisk

www.innodisk.com