
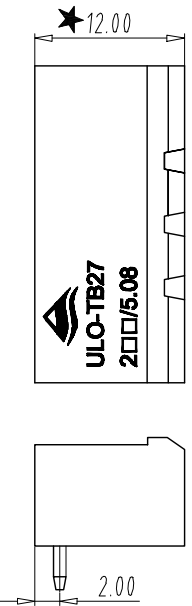
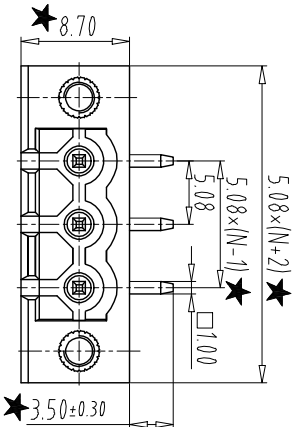


FILE: 2016-002XULO

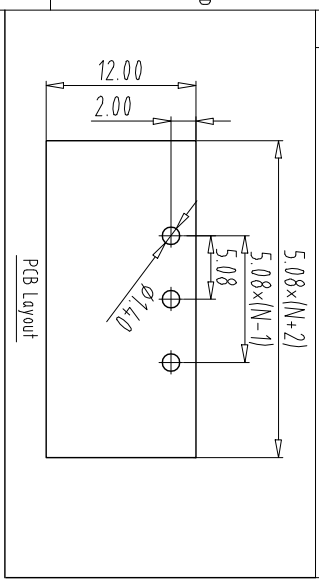

REV	ECN NO.	CONTENT	CHK	DATE
V0.0		初稿	ZCP	

NOTES:

- Rating: <math> 300V/16A</math>
<math><IEC> 320V/20A</math>
- Poles: 02-24P
- Insulation Withstands Voltage: AC2000V/1 Min
- Contact resistance: 20mΩ
- Insulation Resistance: 500MΩ at DC500V
- Using Temperature Range: -40°C/+115°C
- Max soldering : +250° for 5S
- Rohs Compliance.
- With" ★ "is import dimension

How to order
ULO-TB27 - 2RM/5.08 - XXP - Y 0 0 0A

Certificate Series NO. Factory Code poles color: Customer requirements

- 1:Grey
- 2:Blue (standard)
- 3:Black
- 4:Green
- 5:Orange
- 6:Red
- 7:transparent
- 8:Yellow
- 9:White

3	NUT	3170000001	2	Brass	/
2	Solder Pin	314.0000018/19	3	Brass	Sn Plated
1	HOUSING	4030002120	1	PA66	UL94V-0
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	DATE	18.10.17	UNITS	MM	SHEET/OF 1/1
CHK.	DATE		SCALE	1:1	A4
APP.	DATE		NAME	ULO-TB27-2RM/5.08-XXP-Y000A	
NINGBO ULO ELECTRONICS CO.,LTD. 宁波数路电子有限公司			DWGNO.	ULOTB27Y000A	

Total Pitch Tolerances		Nominal dimension range	
in mm		in mm	
0	over	0	over
30	to	30	to
53	to	53	to
70	to	70	to
90	to	90	to
115	to	115	to
150	to	150	to
200	to	200	to
250	to	250	to
320	to	320	to
330	to	330	to
53	to	53	to
70	to	70	to
90	to	90	to
115	to	115	to
150	to	150	to
200	to	200	to
250	to	250	to
320	to	320	to
330	to	330	to
0.3	to	0.3	to
0.25	to	0.25	to
0.2	to	0.2	to
0.3	to	0.3	to
0.2	to	0.2	to
0.3	to	0.3	to
0.5	to	0.5	to

NINGBO ULO ELECTRONICS CO.,LTD.

REV:1.0