


# ◆ SPECIFICATION

DESCRIPTION	UL2896 - 18N x 120mm * 1,25p * (5/5 , 10/10) * (0,1*0,8) * P7
-------------	---

## ► CABLE TYPE (PATTERN : 7 )

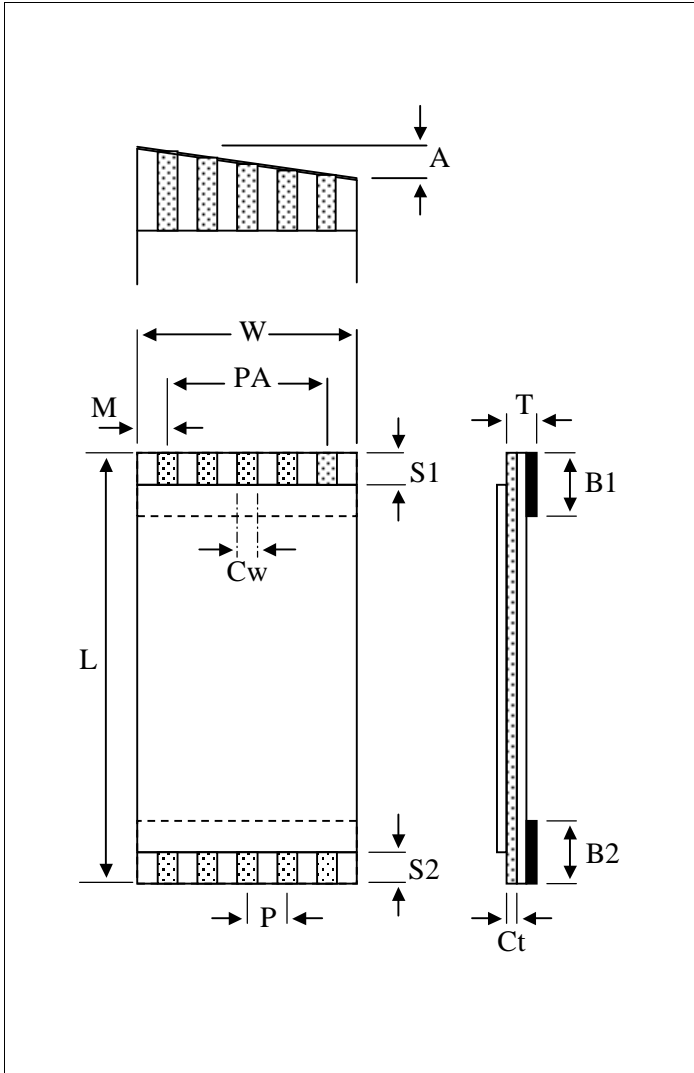

## ► CABLE DIMENSION [unit : mm]

DESCRIPTION	Abbr	Dimension	Tolerance
PITCH	P	1,25	± 0.10
NO. OF CONDUCTOR	N	18	-
CABLE LENGTH	L	120	± 3.00
STRIP LENGTH	S1	5	± 1.0
	S2	5	± 1.0
S/T LENGTH	B1	10	± 2.0
	B2	10	± 2.0
INSERT THICK	T	0,3	± 0.05
WIDTH	W	23,75	± 0.15
SPAN	PA	21,25	± 0.15
MARGIN	M	1,25	± 0.15
CONDUCTOR THICK	Ct	0,10	± 0.01
CONDUCTOR WIDTH	Cw	0,80	± 0.03
LESS THAN	A	0,5	-
PLATED	PL	1μm ↑	

## ◎ REMARK