


1 2 3 4 5 6 7 8

A

A

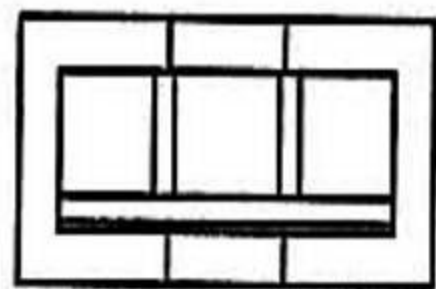

B

B

MATERIAL

Insulator : PBT+30% Glass fiber

Contact Pin : Brass

SPECIFICATION

Current Rate : 1 AMP

Insulation Resistance : 5000MΩMin. at DC 500V


Contact Resistance : 20mΩMax. at DC 100mA

Dielectric Voltage : 500V AC for one minute

Operation Temperature : -55°C to +105°C


C

C

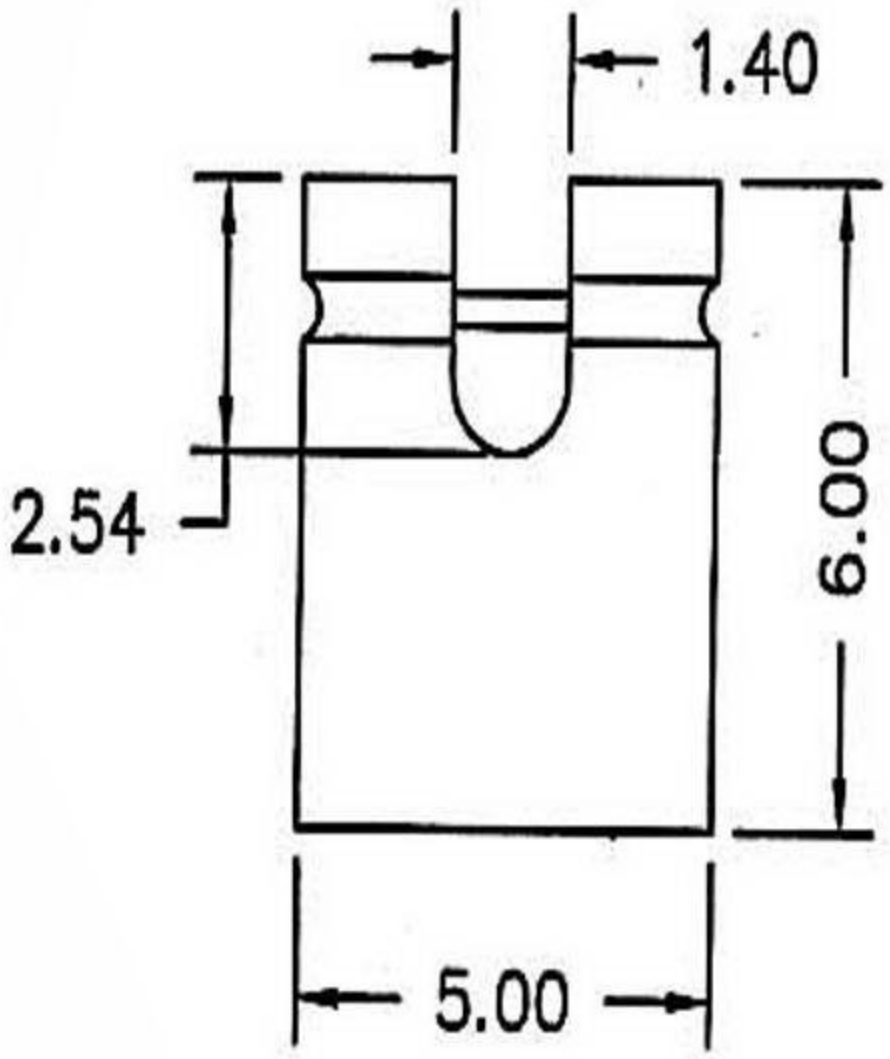


D

D

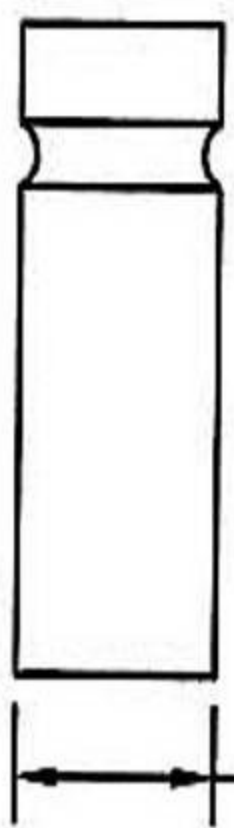

2.40

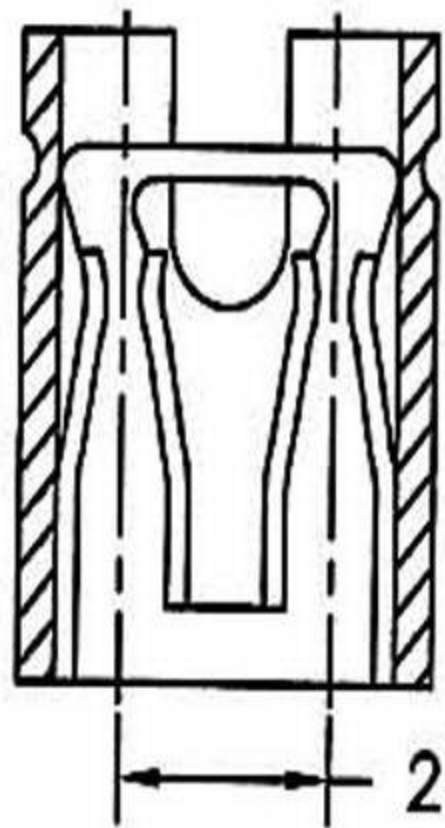

2.54

E

E

F

F

G

G


H

H

RoHS
Compliant

HSM 玄茂科技股份有限公司
HSUAN MAO TECHNOLOGY CO., LTD.

APPD.
核准



TOLERANCE
容許公差

PART NAME 品名 2.54mm MINI
JUMPER 2PH:6.0mm OPEN COVER
GOLD PLATING

DWG.
製圖 ELAINE

SCALE
比例 參考

UNIT
單位 MM

PART NO.
料號 C2700-02AAGB00R

DATA 製表日
2008/11/17

PAGE
張數 1 OF 1

REV.
版本 A

1 2 3 4 5 6 7 8