


- **SPECIFICATIONS**
- Voltage Rating : 250 V AC/DC
 - Current Rating : 7A AC/DC
 - Withstanding Voltage : 1,500V AC/minute
 - Insulation Resistance : 1,000MΩ min
 - Temperature Range : - 40°C to + 105°C
 - Contact Resistance : 20mΩ max

- **HOUSING**
- Part No. : JS-1148-XX
 - Poles : 2 - 24
 - Material : Nylon 66 UL94V-2
 - Q' ty : 1000 pcs./Bag

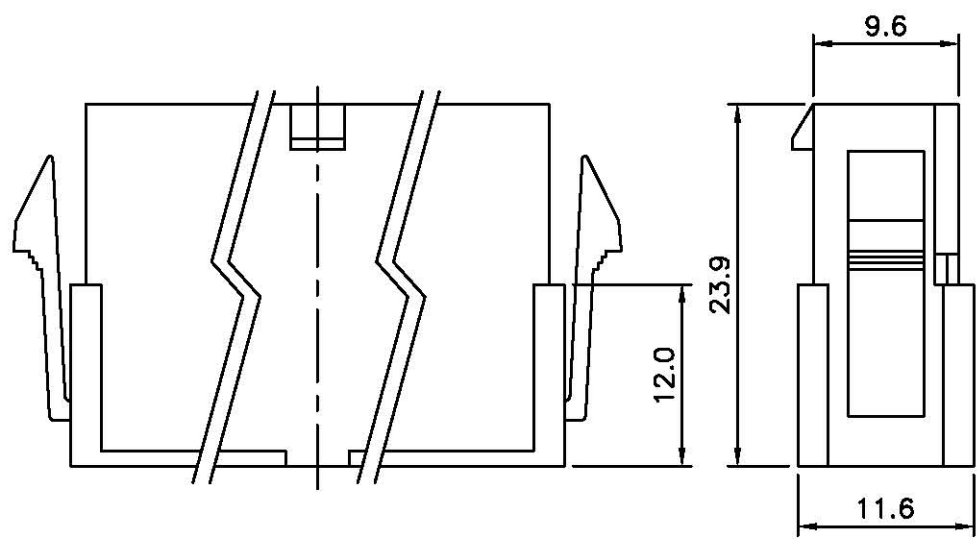

Poles	Part No.	Dimension (mm)			
		A	B	C	D
2	JS-1148- 2	----	5.50	5.80	10.80
4	JS-1148- 4	4.20	9.70	10.00	15.00
6	JS-1148- 6	8.40	13.90	14.20	19.20
8	JS-1148- 8	12.60	18.10	18.40	23.40
10	JS-1148-10	16.80	22.30	22.60	27.60
12	JS-1148-12	21.00	26.50	26.80	31.80
14	JS-1148-14	25.20	30.70	31.00	36.00
16	JS-1148-16	29.40	34.90	35.20	40.20
18	JS-1148-18	33.60	39.10	39.40	44.40
20	JS-1148-20	37.80	43.30	43.60	48.60
22	JS-1148-22	42.00	47.50	47.80	52.80
24	JS-1148-24	46.20	51.70	52.00	57.00

 喬訊電子工業股份有限公司
CHYAO SHIUNN
ELECTRONIC INDUSTRIAL LTD.

PART NO JS-1148-XX
4.20mm Mini-Fit D/R Power Connectors Housing

APPROVED BY	SCALE	UNIT	TOLERANCE
CHECKED BY	2:1	mm	.0 ±0.3
DRAWN BY	PROJ	VER NO.	.00 ±0.2
DATE	DATE	SIZE	.000 ±0.1
2004/04/20	2004/04/20	A4	ALL ±
			ANGLE
			0° ±
			.0° ±

LTR	REVISION RECORD	DATE
ECR	200404-013	2004/04/20