

# PCB Connector


Pitch=1.50mm TYPE

## Electrical Specification:

Rated Voltage: 50/250V AC/DC  
Rated Current: 0.7A 2A  
Contact Resistance: 0.02 Ohm max  
Insulation Resistance: 1000M Ohm min  
Withstand voltage: 800V AC/MIN  
Temperature range for usage : -25°C~+85°C  
P.C board thickness : 0.8~1.6mm

## Material:

Housing: PA66 (PA66) UL94V-2  
Contacts: Brass or Phosphor Bronze  
Plating: Tin 50u" over 100u" nickel  
Wire range : AWG#32~#22

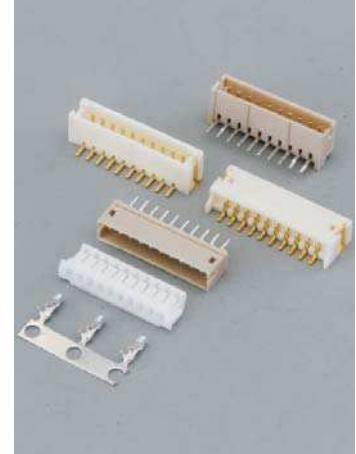

## Housing

