
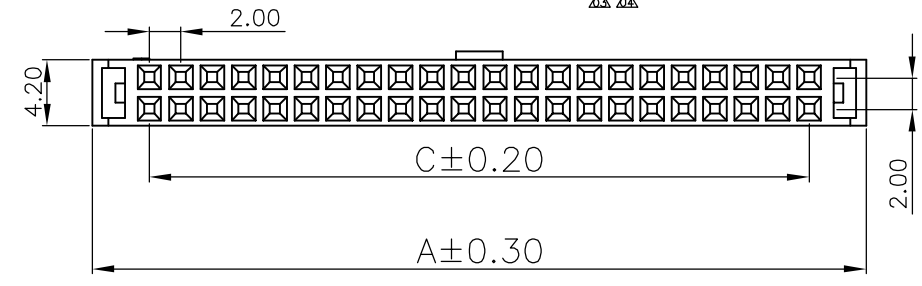
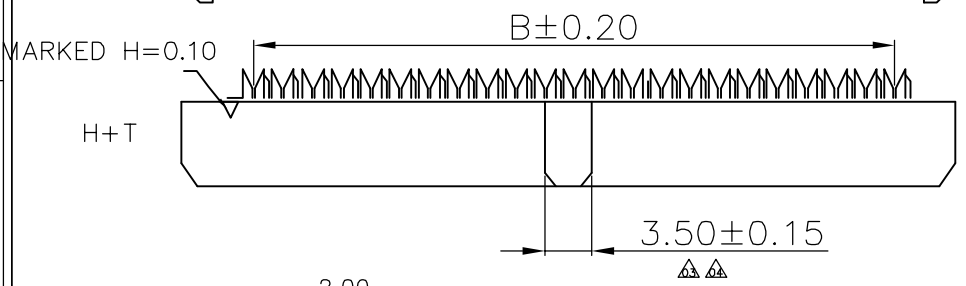
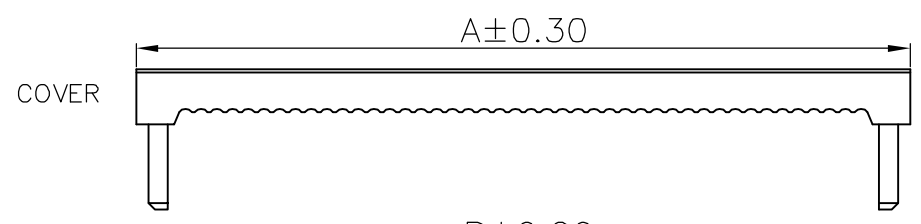


REV.	LOCAS.	DESCRIPTION	DATE	DRAWN
01	NEW	INITIAL RELEASE.	2009.10.23	孫元
02	△△	變更料號可選 PIN數	2009.11.27	周繼偉
03	△△	添加標注一處尺寸和變更更新的圖號	2010.12.08	王元運
04	△△	修正產品尺寸及公差	2013.10.24	張佳黛

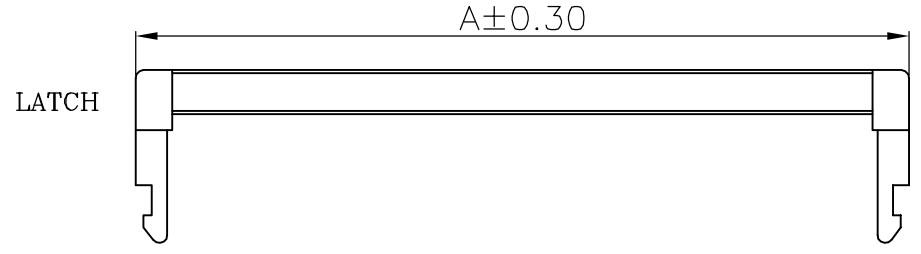

NOTE:

1.Material:
 A:Contact:Phosphor Bronze.
 Gold and tin plated,Nickel under plated.
 B:Housing,Cover,latch: PBT black UL94V-0.

2.Rating:
 A:Voltage:125V AC
 B:Cuurent:0.5 Ampere
 C:Temperature:-40°C to 80°C.

3.Test Requirement and Procedures Summary:
 A: Electrical :
 1.Termination resistance: 25m Max.
 2.Dielectric withstanding Voltage:300V AC.
 3.Insulation resistance: 5000M (before test)
 1000M (behind test)

B: Mechanical:
 1.Mating Force :1.67N max per contact.
 2.Unmating Force: 0.14N Min per conact.

All materials must meet Greenconn requirement for environment protection

Ordering Information

CKFA216 - XX XX A 010 A 1 A X-23

△△ No. of Pins per Row
 03, 04, 05, 06, 07
 08, 09, 10, 11, 12, 13
 15, 17, 20, 22, 25

Standard Plating
 02=Gold Flash
 Selective Plating
 01=Tin
 05=Gold flash/Tin

Color
 1=Black

Standard Packing
 A=Box
 Selective Packing
 C=Tube

△△ Pin/Row	A	B	C	PIN QTY	A	B	C
03	11.20	5.00	4.00	11	27.20	21.00	20.00
04	13.20	7.00	6.00	12	29.20	23.00	22.00
05	15.20	9.00	8.00	13	31.20	25.00	24.00
06	17.20	11.00	10.00	15	35.20	29.00	28.00
07	19.20	13.00	12.00	17	39.20	33.00	32.00
08	21.20	15.00	14.00	20	45.20	39.00	38.00
09	23.20	17.00	16.00	22	49.20	43.00	42.00
10	25.20	19.00	18.00	25	55.20	49.00	48.00

格稜股份有限公司 Greenconn Corporation				GENERAL TOLERANCE X.* ± 1.5° X. ± 0.30 .X* ± 1.0° .X ± 0.20 .XX* ± 0.5° .XX ± 0.15 .XXX* ± 0.3° .XXX ± 0.10		DESIGN: 張佳黛 CHECKED: Davy AUDITED: Andy	DATE: 2013.10.24 DATE: 2013.10.24 DATE: 2013.10.24	DWG. NO. △△ CKFA216-CA10AA PART NO. △△ CKFA216-XX XXA010A1AX-23	TITLE: MFC 2.0 有鼻 SERIALS (CUSTOMER)
REV. 04	UNIT. mm	SCALE. 1:1	PAGE. 1/1						