

# Connector






## Connectors micro-match 2.54mm

### Electrical Characteristics:

Current Rating: 1 AMP  
 Insulator Resistance: 1000M Ohm min. at DC 250V  
 Contact Resistance: 20m Ohm max. at DC 100mA  
 Operating Temperature: -45°C~+105°C

### Material:

Housing: 9T  
 Contacts: Phosphor copper  
 Plating: Tin plated  
 Cable: 1.27mm (0.050") pitch flat cable

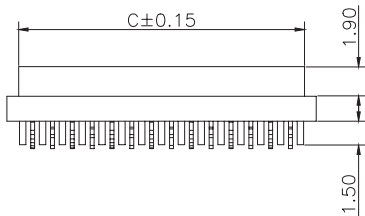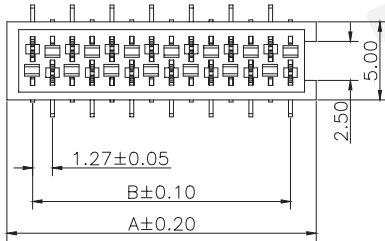

Part No.	A	B	C
04	7.10	3.81	5.60
06	9.64	6.35	8.14
08	12.18	8.89	10.68
10	14.72	11.43	13.22
12	17.26	13.97	15.76
14	19.80	16.51	18.30
16	22.34	19.05	20.84
18	24.88	21.59	23.38
20	27.42	24.13	25.92