

Datasheet

CFast 3SE series

- SATA III interface
- Extremely low power consumption
- iSMART disk health monitoring
- Intelligent error recovery system
- Excellent data transfer speed
- Hardware write protect
- Enhanced power cycling management



Introduction

The Innodisk CFast 3SE operates at SATA III 6.0 Gb/s, which offers data transfer rate of read up to 470MB/sec. and of sequential write up to 250MB/s. Compliant with CFast 2.0 standard, it is designed with 7+17 pin connector and is SATA compatible. Due to the idle power saving, it reduces 30% power consumption. CFast 3SE is featured as small form factor, and suitable for most industrial application.


CFast 3SE can work under harsh environment, and complies with ATA protocol. Without additional drives, the disk can be configured as a boot device or data storage device. CFast 3SE support hardware write protect to prevent modification of valuable data on a device. Besides, through Innodisk's enhanced power cycling technology and more capacitors, CFast 3SE prevents data loss caused by sudden power failure. By using Innodisk's iSMART, users can not only monitor the operation status of SSD, but also visualize Wear-Leveling status with graphics.

CFast 3SE series

Contact us for more information
about the CFast 3SE

Innodisk is a service-driven provider of industrial embedded flash and DRAM storage products and technologies, with a focus on the cloud computing, industrial/embedded, and aerospace and defense industries.

Drawing

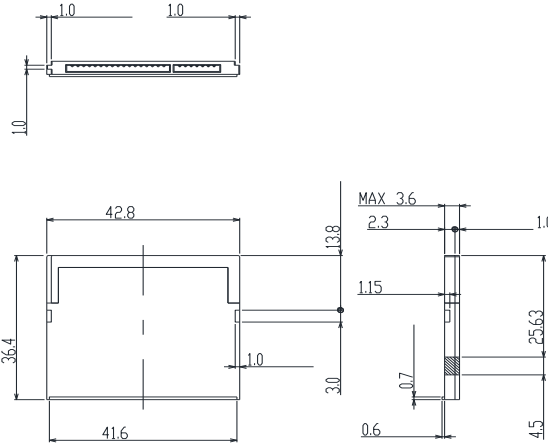

Specifications

Interface	SATA III
Flash Type	SLC
P/E Cycle limit	100,000
Capacity	4GB~64GB
Max. Channels	4
Sequential R/W (MB/sec, max.)	470/250
Max. Power Consumption	1W
Thermal Sensor	optional
External DRAM Buffer	-
H/W Write Protect	√
ATA Security	√
S.M.A.R.T.	√
Dimension (WxLxH)	42.8X 36.4 X 3.6 mm
Environment	Vibration: 20G @7~2000Hz Shock: 1500G @ 0.5ms Storage Temperature: -55°C ~ +95°C MTBF: 3 million hours

Headquarters (Taiwan)

9F., No.100, Sec. 1, Xintai 5th Rd.,
Xizhi Dist., New Taipei City,
Taiwan (R.O.C.)
Tel: +886-2-26963000
Email: sales@innodisk.com

Branch Offices:

USA
usasales@innodisk.com
+1-510-770-9421
Europe
eusales@innodisk.com
+31-040-282-1818
Japan
jpsales@innodisk.com
+81-3-6661-9846
China
sales_cn@innodisk.com
+86-755-21673689
www.innodisk.com

© 2013 Innodisk Corporation.
All right reserved. Specifications
are subject to change without
prior notice.

20130614

Ordering Information

Operation Temp.	4GB	8GB	16GB	32GB	64GB
Standard Grade (0°C ~ +70°C)	DECFA-04GD07SCADB	DECFA-08GD07SCAQB	DECFA-16GD07SCAQB	DECFA-32GD07SCAQB	DECFA-64GD07SCAQB
Industrial Grade (-40°C ~ +85°C)	DECFA-04GD07WCADB	DECFA-08GD07WCAQB	DECFA-16GD07SWAQB	DECFA-32GD07SWAQB	DECFA-64GD07SWAQB

innodisk

www.innodisk.com