



# ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber


Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: HP #361  
Standard: EN300 220(TX)  
Test item: Radiation Test  
Temp.( C)/Hum.(%) 23 C / 48 %  
EUT:  
Mode: TX 433MHz  
Model: RFM110-433S1 10dBm  
Manufacturer:

Polarization: Vertical  
Power Source: DC 3.3V  
Date: 2015-4-3  
Time: 14:15:09  
Engineer Signature:  
Distance: 3m

Note:

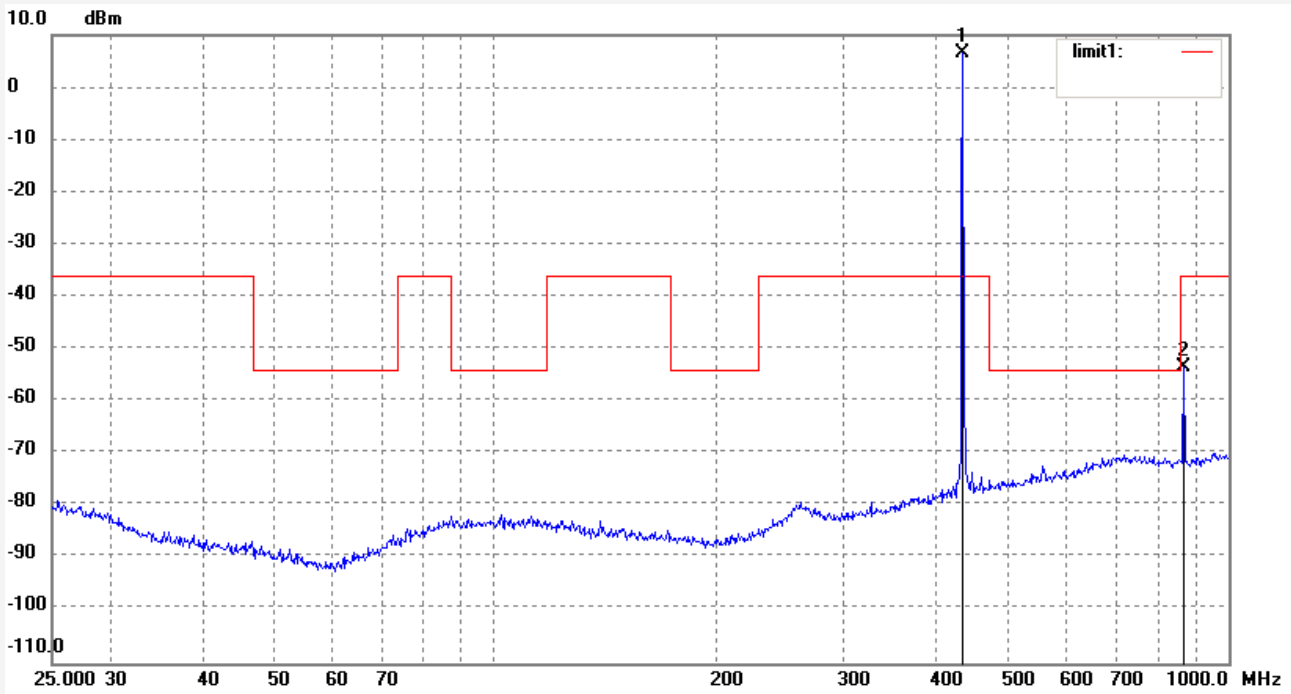

No.	Freq. (MHz)	Reading (dBm)	Factor (dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	434.4445	4.28	2.14	6.42	-36.00	42.42	peak			
2	869.2038	-61.55	8.03	-53.52	-36.00	-17.52	peak			



# ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: HP #362  
Standard: EN300 220(TX)  
Test item: Radiation Test  
Temp.( C)/Hum.(%) 23 C / 48 %  
EUT:  
Mode: TX 433MHz  
Model: RFM110-433S1 10dBm  
Manufacturer:

Polarization: Horizontal  
Power Source: DC 3.3V  
Date: 2015-4-3  
Time: 14:16:30  
Engineer Signature:  
Distance: 3m

Note:

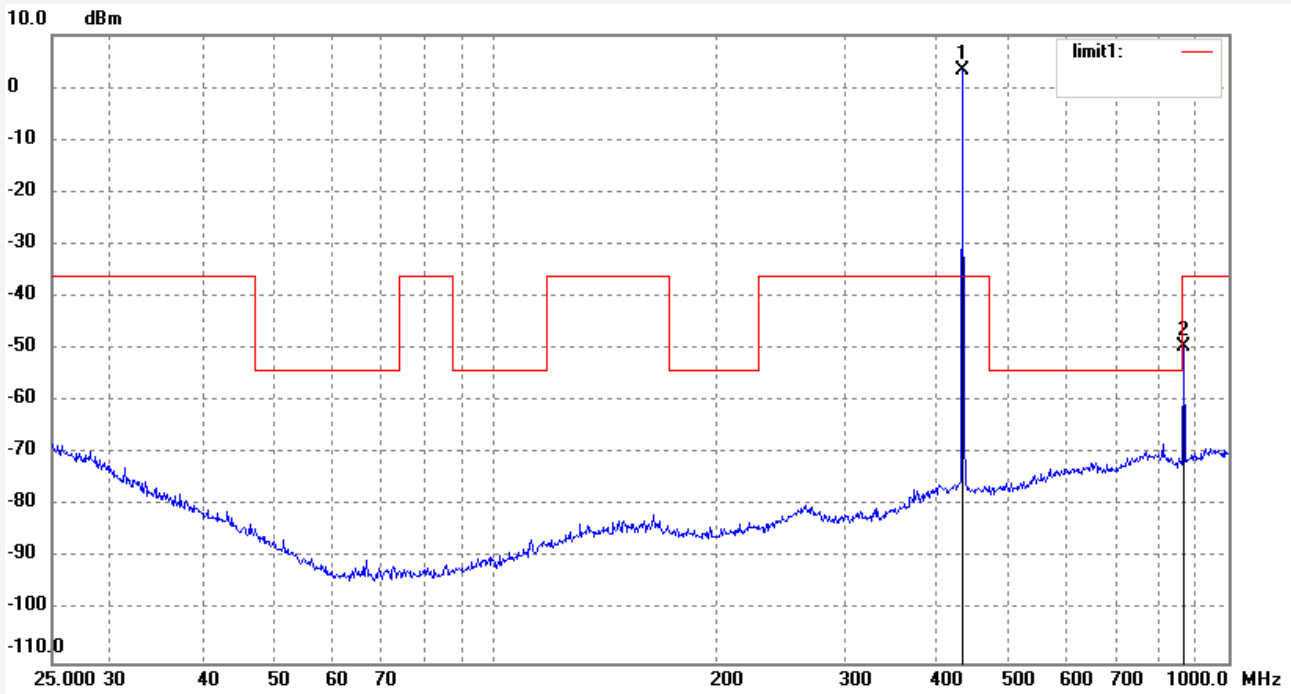

No.	Freq. (MHz)	Reading (dBm)	Factor (dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	434.4445	0.17	2.96	3.13	-36.00	39.13	peak			
2	869.2039	-57.59	8.16	-49.43	-36.00	-13.43	peak			



# ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: HP #380  
Standard: EN300 220(TX)  
Test item: Radiation Test  
Temp.( C)/Hum.(%) 23 C / 48 %  
EUT:  
Mode: TX 433MHz  
Model: RFM110-433S1 10dBm  
Manufacturer:

Polarization: Vertical  
Power Source: DC 3.3V  
Date: 2015-4-3  
Time: 15:14:17  
Engineer Signature:  
Distance: 3m

Note:

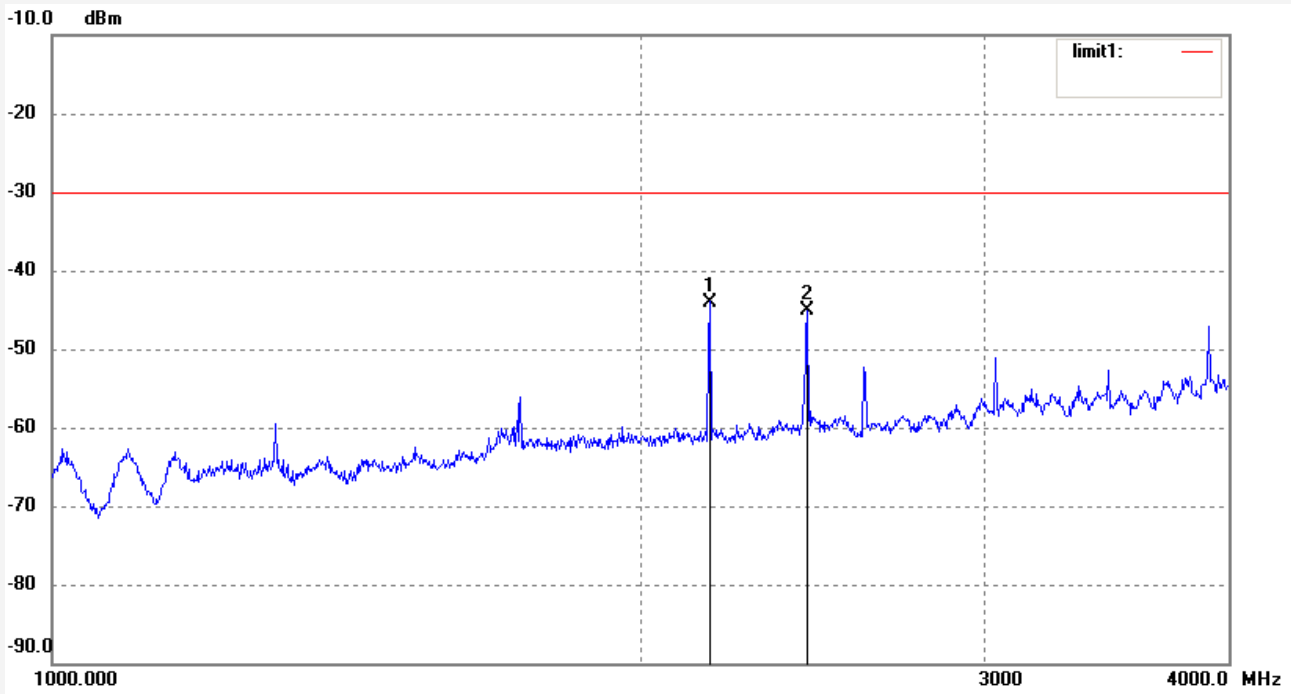

No.	Freq. (MHz)	Reading (dBm)	Factor (dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2170.459	-44.78	0.78	-44.00	-30.00	-14.00	peak			
2	2435.132	-47.36	2.35	-45.01	-30.00	-15.01	peak			



# ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: HP #381  
Standard: EN300 220(TX)  
Test item: Radiation Test  
Temp.( C)/Hum.(%) 23 C / 48 %  
EUT:  
Mode: TX 433MHz  
Model: RFM110-433S1 10dBm  
Manufacturer:

Polarization: Horizontal  
Power Source: DC 3.3V  
Date: 2015-4-3  
Time: 15:15:57  
Engineer Signature:  
Distance: 3m

Note:

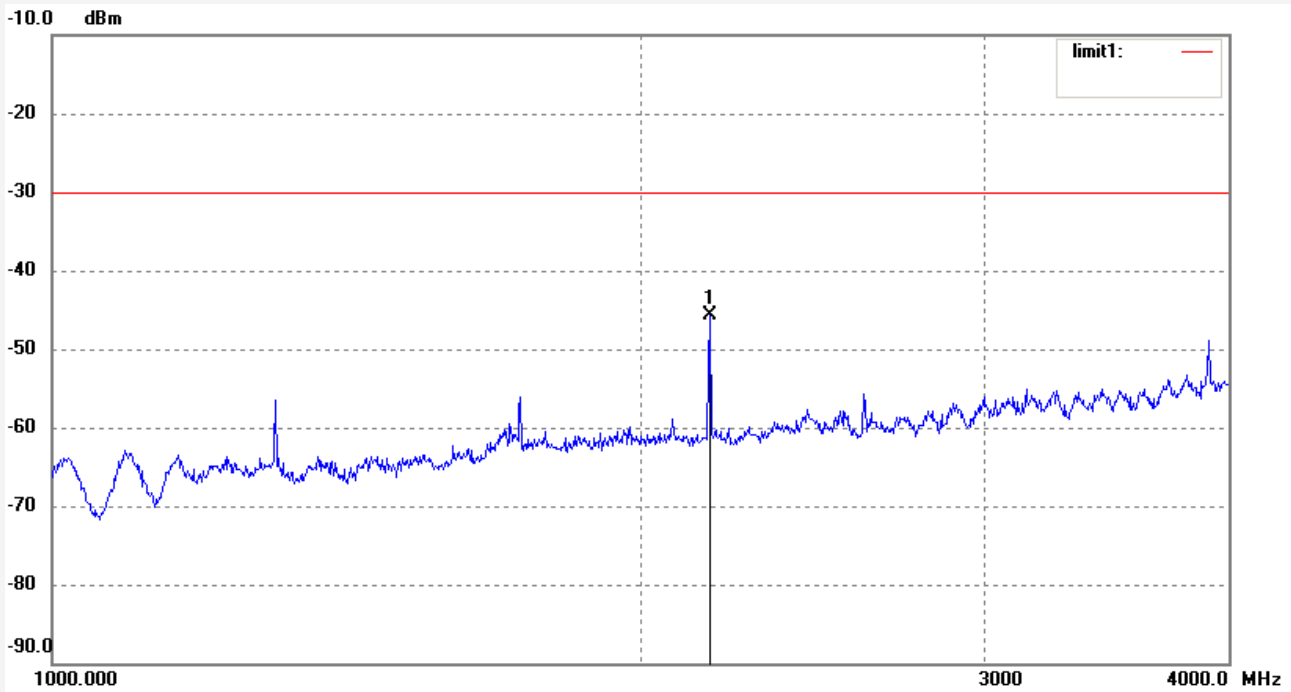

No.	Freq. (MHz)	Reading (dBm)	Factor (dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2170.459	-46.44	0.78	-45.66	-30.00	-15.66	peak			