


MPC152-832

15" TFT Medical Grade Panel Computer with Low Power Intel® Atom™ Processor D2550



- | | |
|--------------------------------------|-------------------------|
| 1. Power switch (ATX) | 7. DisplayPort |
| 2. Screw conn. w/ AC power adapter | 8. Ethernet |
| 3. Terminal block for DC power input | 9. USB 2.0 x 2 |
| 4. USB 2.0 x 2 | 10. Audio (Line-out) |
| 5. Isolated COM 3 (RS-232) | 11. Touch on/off button |
| 6. COM 1 (RS-232/422/485) | |

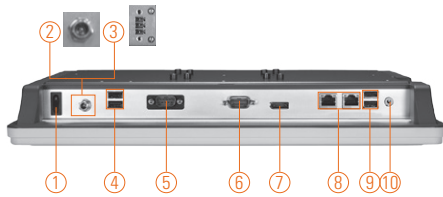

Introduction

The MPC152-832 is a 15" Intel® Atom™-based fanless medical grade touch panel computer which is well-suited for applications like medical image processing and medical measuring instrument. Especially designed for the medical environment, it adopts whole system IPX1 and front IP65 waterproof design which protects the entire system from outside liquid, preventing system from crashing. In response to market demand, this medical panel computer is a cost effective solution. It supports Intel® Atom™ processor D2550 1.86 GHz.

Super slim & ultra light design

The MPC152-832 is a super slim touch panel computer for space-limited environment with its thickness of 54.6 mm and weight of 3.2 kg only, which make it installed everywhere. Besides, it provides two types of power input. One is medical grade AC medical power adapter with screw type connector, and the other is DC power input (10-30VDC) with terminal block connector (option).

Built-in internal WLAN


The MPC152-832 provides a PCIe Mini Card slot and a built-in WLAN antenna for wireless network connections. By simply plugging in the wireless LAN card, customers can use the 15-inch medical computer in a wireless LAN/GPRS/ GSM/4G environments.

Certifications

This medical panel platform complies with UL60601-1, EN60601-1, CE, FCC Class B certifications to ensure medical operation safety.

Features

- 15" XGA TFT LCD display with LED backlight
- Fanless cooling system with Intel® Atom™ processor D2550 2 cores @1.86 GHz
- UL60601-1, EN60601-1, CE and FCC class B certified
- Water /dust-proof design (front bezel: IP65, full enclosure: IPX1)
- One key touch screen on/off button
- Ultra slim design: thickness 54.6 mm
- Super light weight: 3.2 kg
- Supports optional panel mount, wall mount, VESA mount and desktop stand



▲ Side view

Specifications

| | | |
|-------------|---|---|
| Front Bezel | IP65, NEMA 4 rugged protection, plastic front bezel | |
| LCD Panel | Display Type | 15" XGA TFT LCD with LED backlight |
| | Brightness (cd/m ²) | 400 nits |
| | Resolution | 1024 x 768 |
| | Viewing Angle (H/V) | 160°/140° |
| Main System | CPU | Intel® Atom™ processor D2550 2 cores @1.86 GHz |
| | Chipset | Intel® NM10 |
| | System Memory | 1 x 204-pin DDR3 SO-DIMM max. up to 4 GB |
| | BIOS | AMI 8 Mbit with RPL/PXE LAN boot ROM |
| | Storage | 1 x 2.5" SATA HDD 1 x CompactFlash™ |
| | Watchdog Timer | 255 levels, 0-255 sec. |
| | Onboard Graphics | Integrated in Intel® GFX |

* All specifications and photos are subject to change without notice.

Specifications

| | |
|---------------------|--|
| I/O Connector | 1 x RS-232 (COM 3 w/isolated 4KV) 1 x RS-232/422/485 (COM 1) 1 x DisplayPort 1 x Audio (Line-out) 4 x USB 2.0 2 x 10/100/1000Mbps Ethernet |
| Expansion Interface | 1 x PCIe Mini Card slot |
| Touch screen | Resistive type One key touch screen on/off button |
| Power Supply | 1. AC version: Medical grade 100-240V AC-DC 60W power adapter 2. DC version: 10-30VDC with terminal block |
| Dimensions | 387.9 mm (15.27") (W) x 54.6 mm (2.14") (D) x 307.7 mm (12.11") (H) |
| Packing Dimensions | 510 mm (20.08") (W) x 105 mm (4.13") (D) x 385 mm (15.16") (H) |
| Weight(net/gross) | 3.2 kg (7.05 lb)/5.1 kg (11.24 lb) |
| Environment | Operating temperature: 0° ~ +40°C (+32°F ~ +104°F) Storage Temperature: 0° ~ +40°C (+32°F ~ +104°F) Relative humidity: 20%-90% @ 40 ; non-condensing Operation vibration: 2G, 5 ~ 500Hz, random for CompactFlash™ |
| Certificate | CE, FCC class B, UL60601-1, EN60601-1 |

* The DC power source to be used with MPC152-832 must be galvanically isolated according to IEC60601-1 safety of medical devices!

Ordering Information

| | |
|-------------------------------|--|
| MPC152-832-J (E228152100) | 15" TFT fanless medical grade panel computer with Intel® Atom™ processor D2550 and medical adapter, screw type, AC power input, EMI class B. |
| MPC152-832-DC (E228152101) | 15" TFT fanless medical grade panel computer with Intel® Atom™ processor D2550, DC power input with terminal block connector |

* Specification and certifications are based on options and may vary.

Optional EOS Installation

WES7

WES

Optional OS Installation

Windows® 7

Windows® XP

Dimensions

