
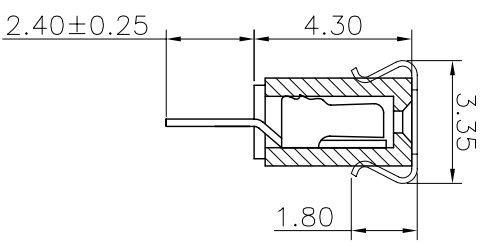
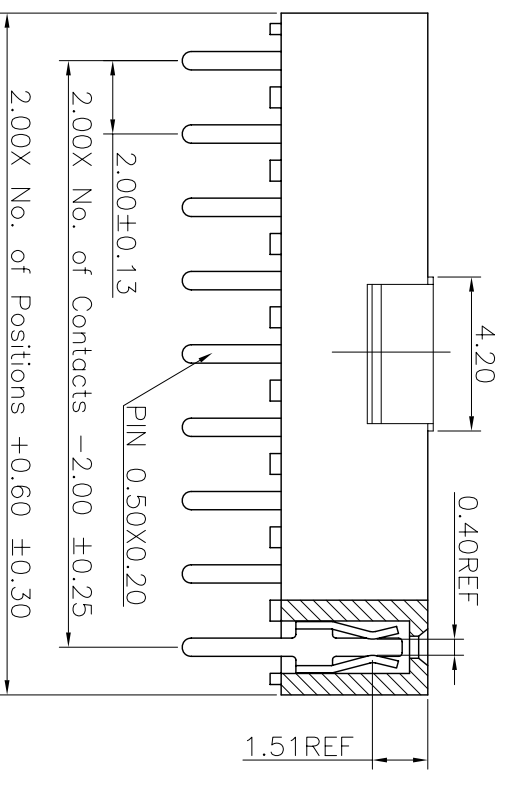


REV.	LOCAS.	DESCRIPTION	DATE	DRAWN
01	NEW	INITIAL RELEASE:	2009.07.20	卓 激
02	△	依上級要求變更圖號	2012.05.21	李芳忠

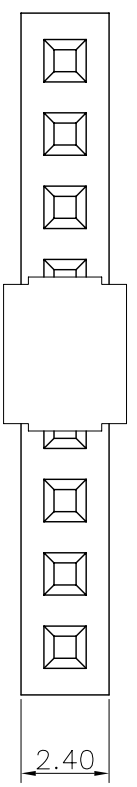


Specifications
 Current Rating:2Amp
 Insulation Resistance:1000MΩMin.
 Dielectric Withstanding Voltage:500VAC
 Contact Resistance:20mΩMax.
 Operating Temperature:-40°C to +105°C
 Materials
 Contact Material:Phosphor Bronze
 Insulator Material:High Temperature Thermoplastic, UL 94V-0 Nylon 6T(無鹵)or the equivalent material
 All materials must meet Greencoan requirement for environment protection.

Ordering Information

C SFA101 - XX XX A 001 R 1 A X

No. of Pins per Row 02~40
 Standard Plating
 02=Gold Flash
 Selective Plating
 01=Tin
 05=Gold Flash/Tin

Color 1=Black
 Standard Packing
 A=Box
 Selective Packing
 C=Tube
 E=Cap+Tube
 F=Cap+Tape&Reel

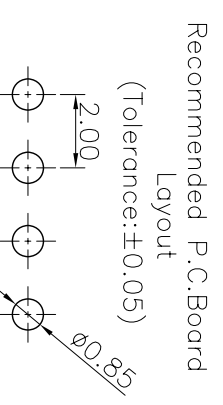

格 菱 股 份 有 限 公 司 Greencoan Corporation		GENERAL TOLERANCE X.±5.0° X.±0.30 .X.±3.0° .X±0.25 .XX±2.0° .XX±0.15 .XXX±1.0° .XXX±0.10		DESIGN: 李芳忠 CHECKED: 劉北平 AUDITED: 李輝 APPROVED: cc_li	DATE: 2012.05.21 DATE: 2012.05.21 DATE: 2012.05.21 DATE: 2012.05.21	DWG. NO. △ CSFA101-CA1RA	TITLE: 2.00 FEMALE HEADER SINGLE ROW DIP TYPE CONNECTOR
REV. 02	UNIT. mm	SCALE. 5:1	PAGE. 1/1			PART NO. CSFA101-XXXX	

A 1 2 3 4 5 6 7 8 9