


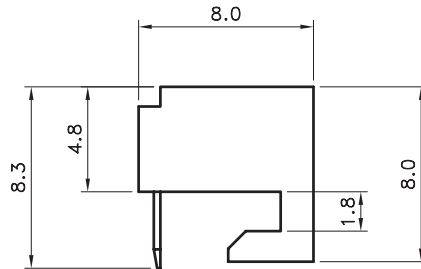
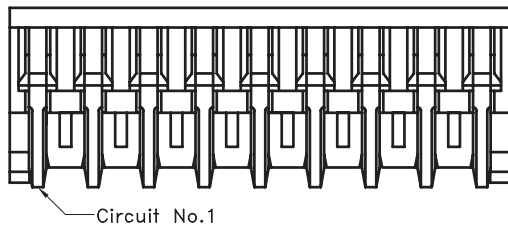


Recommnd PCB Layout

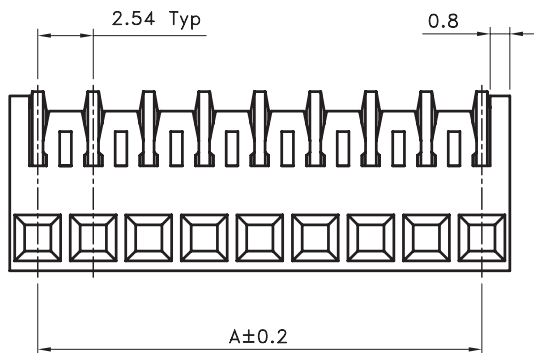

A-A Section

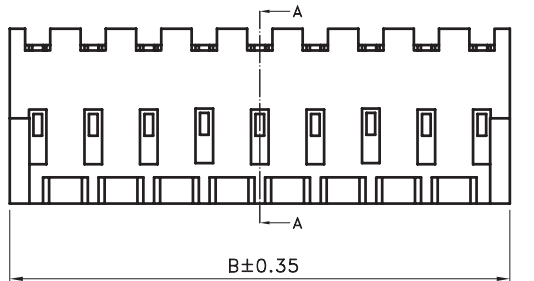

■ SPECIFICATIONS

- Voltage Rating : 250V AC/DC
- Current Rating : 2.5A AC/DC
- Withstanding Voltage : 1000V AC/minute
- Insulation Resistance : 1000MΩ min
- Temperature Range : - 40°C to + 105°C
- Contact Resistance : 20mΩ max

■ WAFER

- Part No. : JS-5005A-XXR
- PolesN : 2-30(Side Entry Typ)
- Material : Contact : Brass, Tin Plated
Base : Nylon 66 UL94V-2
- Q' ty : 1,000pcs./PVC Box

Poles	Part No.	Dimension(mm)	
		A	B
2	JS-5005A-02R	2.54	5.10
3	JS-5005A-03R	5.08	7.64
4	JS-5005A-04R	7.62	10.18
5	JS-5005A-05R	10.16	12.72
6	JS-5005A-06R	12.70	15.26
7	JS-5005A-07R	15.24	17.80
8	JS-5005A-08R	17.78	20.34
9	JS-5005A-09R	20.32	22.88
10	JS-5005A-10R	22.86	25.42
11	JS-5005A-11R	25.40	27.96
12	JS-5005A-12R	27.94	30.50
13	JS-5005A-13R	30.48	33.04
14	JS-5005A-14R	33.02	35.58
15	JS-5005A-15R	35.56	38.12
16	JS-5005A-16R	38.10	40.66
17	JS-5005A-17R	40.64	43.20
18	JS-5005A-18R	43.18	45.74
19	JS-5005A-19R	45.72	48.28
20	JS-5005A-20R	48.26	50.82
21	JS-5005A-21R	50.80	53.36
22	JS-5005A-22R	53.34	55.90
23	JS-5005A-23R	55.88	58.44
24	JS-5005A-24R	58.42	60.98
25	JS-5005A-25R	60.96	63.52
26	JS-5005A-26R	63.50	66.06
27	JS-5005A-27R	66.04	68.60
28	JS-5005A-28R	68.58	71.14
29	JS-5005A-29R	71.12	73.68
30	JS-5005A-30R	73.66	76.22



喬訊電子工業股份有限公司
CHYAO SHIUNN
ELECTRONIC INDUSTRIAL LTD.

PART NO JS-5005A-XXR
2.54mm Side Entry Typ Wafer

APPROVED BY	SCALE	UNIT	TOLERANCE	LTR	REVISION RECORD	DATE	LTR	REVISION RECORD	DATE
林宗		mm	.0 ±0.3	ECR	RoHS compliant	06/04/01			
CHECKED BY	PROJ	VER NO.	.00 ±0.2	ECR	200803-012	08/03/11			
		a2	.000 ±0.1						
DRAWN BY	DATE	SIZE	ALL ±				CUSTOMER		
黃科源	2008/03/11	A4	ANGLE				Conforms to The RoHS Instruction		
			0° ±						
			.0° ±						