

Materials:

* Insulator: Glass filled PBT UL 94V-0

Color Ivory(Nature)

* Shell: Zinc alloy with Nickel plated

△ * Contact: Brass

Ordering Code:

CU07 29 S * V I G
 ① ② ③ ④ ⑤ ⑥ ⑦

① Series No.

② Contacts: 29= 24+4+1

③ Contact type: S= Socket

④ Plating code:

A= Selective Gold flash plated over
 1.27 μ m(50 μ) Nickel


B= Selective 0.38 μ m(15 μ) Gold plated
 over 1.27 μ m(50 μ) Nickel

C= Selective 0.76 μ m(30 μ) Gold plated
 over 1.27 μ m(50 μ) Nickel

⑤ Tail style: V= Straight

⑥ Product type: I= Integrated Type

⑦ Option: G= Attach #4-40 UNC Hex screw

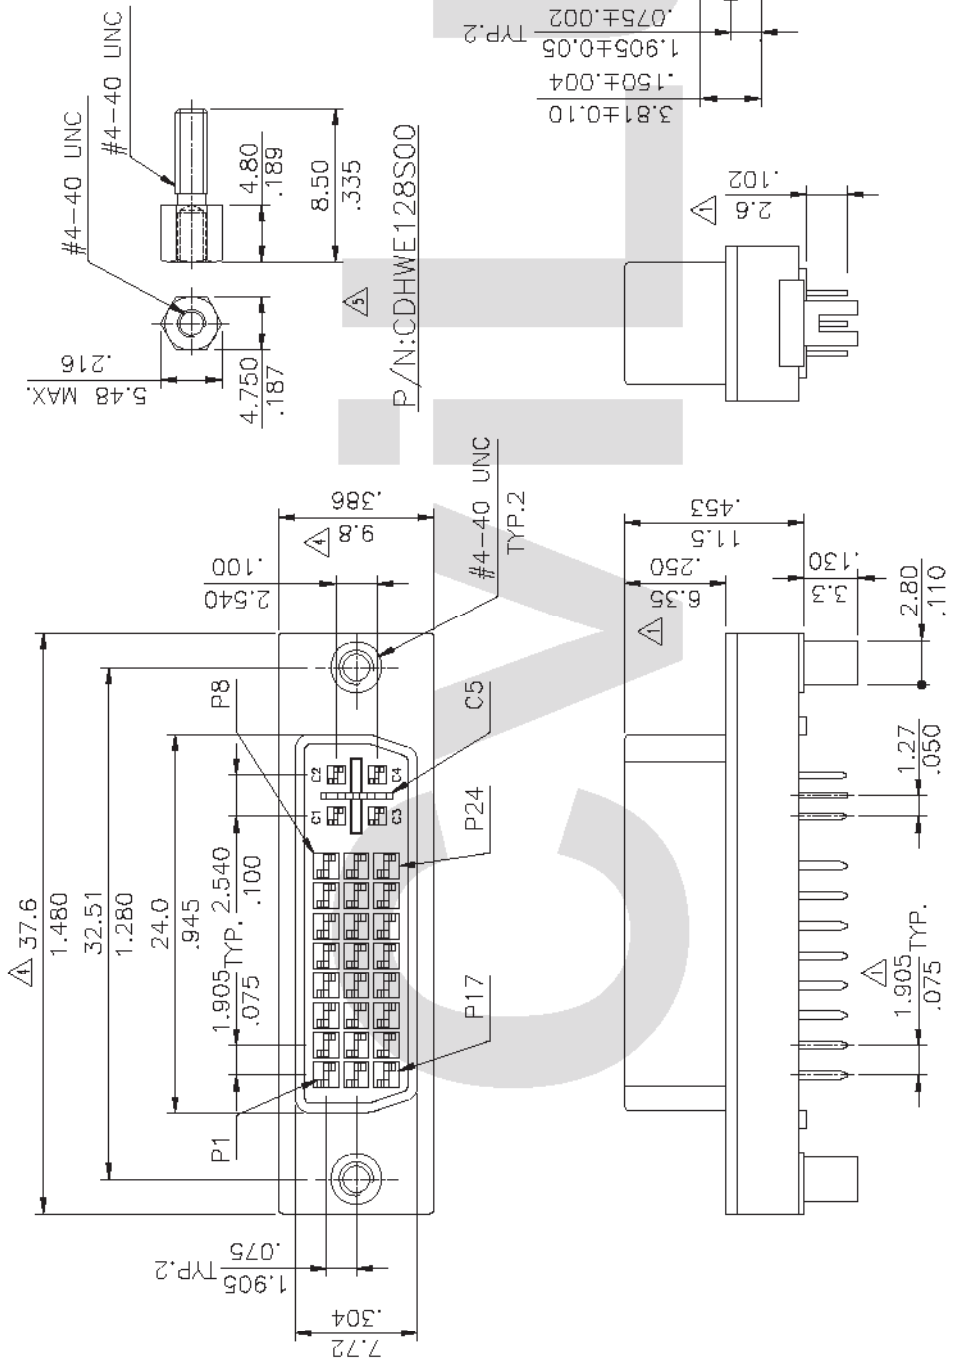

P/N: CDHWE128S00

Recommended P.C Board Layout

RoHS Compliant

SYM	NAME	DATE	REVISIONS	APPROVED BY:	CHECKED BY:	ENGINEER:	DRAWN BY:	DATE	UNIT: mm / inch	TITLE: DW STRAIGHT RECP. CONN. (INTEGRATED TYPE 24+4+1)
4	Sandy	11/27/06	ECN06421	Alex	David	Eisley	Sandy	1/23-07	XX ± 0.30/012	MATERIAL:
3	Sun	9/30/05	ECR05067-0/ECN05275	Alex	David	Eisley	Sandy	1/25-07	XX ± 0.20/008	FINISH:
2	SANDY	06/23-04	ECN04241						XXX ± 0.10/004	
5	Sandy	1/22-07	ECN07025							

CVLUX CORP.
 2007.01.30
 ISSUED

瀚菱股份有限公司
 Cvilux Corporation

DRAWING NO. CU0707SF	PART NO. CU0729S*VIG
SCALE 2 / 1	SHEET 1 OF 1