


Specifications
 Current Rating: 2amp
 Insulation Resistance: 1000MΩ Min.
 Dielectric Withstanding: 500V AC
 Contact Resistance: 20mΩ Max.
 Operating Temperature: -40°C to +105°C

Materials
 Contact Material: Copper Alloy
 Insulation Material: Polyester, UL 94V-0 Nylon6T
 All materials must be GP materials

Recommended P.C.Board

Hole Layout

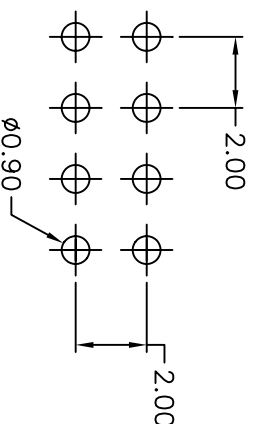

Ordering Information

G PFB220 - XX XX A 01

No. of Pins per Row
 05, 06, 07, 08, 10, 11
 13, 15, 17, 20, 22, 25

Contact Plating
 01=Tin
 02=Gold Flash
 Duplex Plating
 05=Gold Flash/Tin

格 菱 股 份 有 限 公 司
Greencom Corporation

REV.	01	UNIT	mm	SCALE	3:1
------	----	------	----	-------	-----

GENERAL TOLERANCE		
X' ± 5'	X' ±	X' ±
X. ± 2'	X. ±	X. ± 0.38
XX. ± 1'	XX. ±	XX. ± 0.25
XXX. ± 0.5'	XXX. ±	XXX. ± 0.13

DRAWN	XIAO PING	DATE	09-08-04'
CHECK		DATE	
APPROVE		DATE	

DWG. NO.	G PFB220-A01
PART NO.	G PFB220- XX XX A 01

TITLE	2.00 BOX HEADER DUAL ROW R/A TYPE BASE 5.60H
-------	----------------------------------------------------