

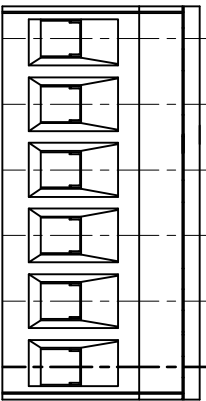

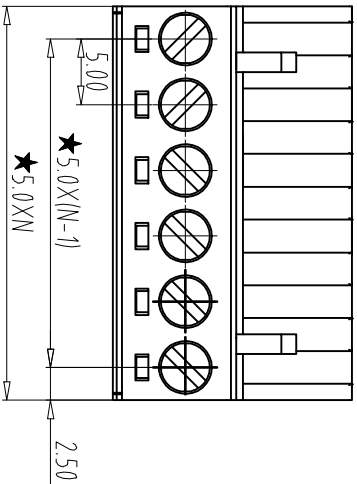


FILE: 2016-D02VUL0

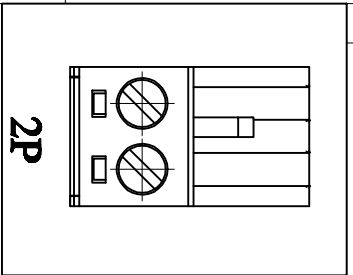

REV	ECN NO	CONTENT	CHK	DATE
V0.0		初版本	ZCP	16.12.27

NOTES:

- Rating: 300V/16A
<IEC> 320V/20A
 - Poles:02-24P
 - Insulation Withstands Voltage: AC2000V/1 Min
 - Screw Torque Viaue:0.4Nm
 - Insulation Resistance: 500M Ω at DC500V
 - Using Temperature Range: -40°C/+115°C
 - Suitable Electric Wire: 12-28AWG(UL) 2.5mm²(IEC)
 - Strip length:7-8mm
 - ROHS compliance
- 10 With" ★ "is important dimension

How to order

UL0-TB21 - 2K/5.0 - XXP - Y 0 0 0A

Certificate Factory poles color Customer requirements
 Series NO. Code

- 1:Grey
- 2:Blue
- 3:Black
- 4:Green
- 5:Orange
- 6:Red
- 7:transparent
- 8:Yellow
- 9:white

Total Pitch Tolerances		Nominal dimension range	
in	mm	in	mm
0	0	0	0
30	30	53	70
53	53	70	90
70	70	90	115
90	90	115	150
115	115	150	200
150	150	200	250
200	200	250	320
250	250	320	30
320	320	30	53
30	30	53	70
53	53	70	90
70	70	90	115
90	90	115	150
115	115	150	200
150	150	200	250
200	200	250	320
250	250	320	10
320	320	10	10
10	10	10	100
100	100	10	150
150	150	10	150

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
5	SCREW	S000000170	N	STEEL	M2.5/Zn Plated
4	Clamp	1020B0010	N	Phosphor Bronze	Tin Plated
3	BLOCK	X000000170	N	Brass	Ni Plated
2	Cover	1020C0YXXA	1	PA66	UL94V-0
1	Housing	1020A0YXXA	1	PA66	UL94V-0
DWG.	ZCP	DATE	SCALE	SHEET/OF	1/1
		16.12.27	1:1	A4	
CHK.	DATE	SCALE	SHEET/OF	1/1	
APP.	DATE	SCALE	SHEET/OF	1/1	
<p>NINGBO UL0 ELECTRONICS CO.,LTD. 宁波欧路电子有限公司</p>			NAME	UL0-TB21-2K/5.0-XXP-Y000A	
			DWGNO	UL0TB21Y000A	