嘉尼企業股份有限公司 CANAL ELECTRONIC CO.,LTD.

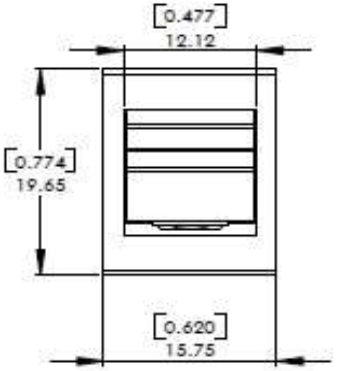

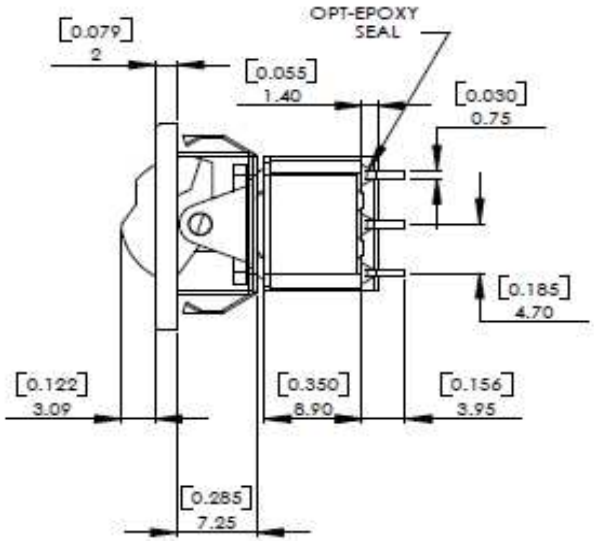

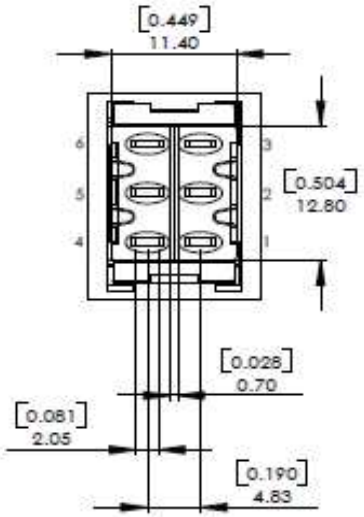



Schematic



Model No.	Switching Position		
A2R10-R04#E	ON	NONE	ON
A2R40-R04#E	ON	NONE	(ON)
A2R20-R04#E	ON	OFF	ON
A2R50-R04#E	(ON)	OFF	(ON)
A2R60-R04#E	(ON)	OFF	ON
A2R80-R04#E	ON	ON	ON

PANEL MOUNTING



工程部
2016.01.19
文件管制章

SPECIFICATIONS:
CONTACT RATING : 5 AMPS @ 120 V AC or 28 V DC.
2 AMPS @ 250 V AC or 0.4VA AMPS @20 V AC or DC.
ELECTRICAL LIFE : 6,000 make-and-break cycles at full load.
CONTACT RESISTANCE : 10 mΩ max. initial @ 2-4 V DC.
100 mA, for both silver and gold plated contacts.
INSULATION RESISTANCE : 1,000 MΩ min.
DIELETRIC STRENGTH : 1,000 V RMS @ sea level.
OPERATING TEMPERATURE : -30 ℃ to 130 ℃

MATERIALS:
CASE : Diallyl phthalate (DAP)(UL-94V-0).
ACTUATOR : Nylon,black standard.
BUSHING : ZINC ALLOY.
HOUSING : Stainless steel.
TERMINAL/CONTACT : Copper alloy, with silver or gold plated or gold over silver.
SWITCH SUPPORT : Brass, tin plated.

NOTE: TOLERANCES UNLESS OTHERWISE SPECIFIED : + .012 0.3 (mm).

REVISION	DESCRIPION	REVISED BY	TOLEANCES .X .XX ANGLE ½°				UNIT	mm	PART NAME	SPEC DRAWING	DWG NO
4			DRAWN BY	張俊雄	DESIGNED BY	王豐文	SCALE				WS2369A
3											
2			CHECKED BY	Jimmy	APPROVED BY		DATE	2014.01.15	PART NO	A2R##-R04#E	
1 2014.01.15	首次出圖	張俊雄									