






SPECIFICATIONS

Rated Current:1.5AMP
 Contact Resistance:20mΩ Max
 Withstand Voltage:500V AC/DC
 Insulation Resistance:1000MΩ Min
 Operation Temperature:-40°C to +105°C

Contact Material:Brass
 Contact Plating:Au or Sn Over Ni
 Insulator Material:Polyester(UL94V-0)
 Standard: PA6T
 Max.Processing Temp: 230°C for 30-60 seconds
 (260°C for 5 seconds)

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

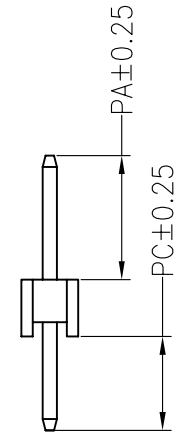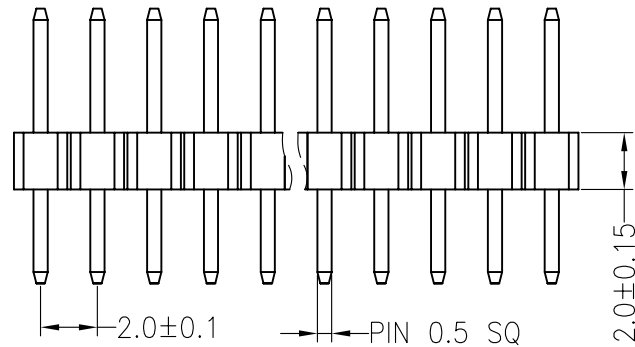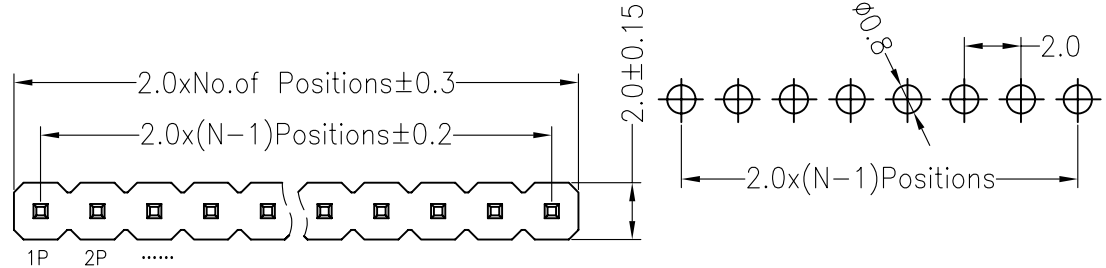

Dimension antitheses list			
ITEM	PC	PA	L
Standard	2.80	3.90	8.70
Alternate			

				OPERATION		DRAW		12.04.11		SCALE	FIT	Conntherm		
				X.X	±0.30					UNIT	mm			
				X.XX	±0.20	CHECK				SIZE	A4			
				X.XXX	±0.10					SHEET	1/1			
				Angle	±3°	APPROVE				PROJ.	◆ ↗			
A0	2012.04.11	NEW DRAWING								PART NO.				
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	DIM	TOL					TITLE:		2.0PH 1xNpin H2.0mm Single 180°	