


eBOX640-860-FL

Fanless Embedded System Featuring Socket G2 Intel® Core™ i7/ i5/ i3/ Celeron® Processors
TDP under 35W, Dual HDD and Multi-display



▲ Front view

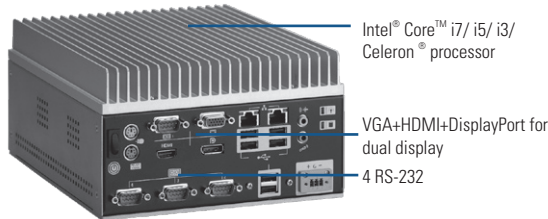

Specifications

| | |
|-----------------------|---|
| Standard Color | Silver-Black |
| Construction | Aluminum extrusion and heavy-duty steel |
| CPU | Socket G2 (rPGA 988B) for 2nd Generation Intel® Core™ i7/ i5/ i3 processor (Sandy Bridge)/ Celeron® processor TDP under 35W |
| System Memory | 2 x 204-pin DDR3-1066/1333 SO-DIMM max. up to 16 GB |
| Chipset | Intel® QM67 |
| BIOS | AMI |
| System I/O Outlet | 4 x RS-232 (COM 1-4) 1 x VGA 1 x HDMI 1 x DP 1 x Audio (Mic-in/Line-out) 1 x PS/2 keyboard 1 x PS/2 mouse 2 x 10/100/1000Mbps Ethernet 6 x USB 2.0 1 x SMA type connector opening for antenna 1 x VDC power input connector 1 x ATX power switch |
| Watchdog Timer | 255 levels, 1 ~ 255 sec. |
| Storage | Supports 2 x 2.5" SATA HDD drive bay Supports 1 x CFast™ |
| Expansion Interface | 1 x PCI Express Mini Card (USB+PCI Express signal) |
| System Indicator | 1 x green LED for system power-on 1 x orange LED for HDD active |
| Power Supply | DC ATX 107W Input: DC 16~28VDC Output: +3.3VDC @ 6A, +5VDC @ 9A, +12VDC @ 3A, -12VDC @ 0.1A, +5Vsb @ 1A |
| Operating Temperature | -5°C ~ +50°C (23°C ~ 122°C) (with W.T. HDD) |
| Storage Temperature | -20°C ~ +80°C (-4°F ~ +176°F) |
| Humidity | 10% ~ 90% , non-condensing |
| Vibration Endurance | 3 Grms w/ CFast™ (5-500Hz, X, Y, Z directions) |
| Dimensions | 193 mm (7.6") (W) x 232 mm (9.13") (D) x 111 mm (4.37") (H) |
| Weight (net/gross) | 3.8 kg (8.37 lb)/4.6 kg (10.14 lb) |
| Certification | CE, EN60950 compliance |
| EOS Support | CE, Win7 embedded, Linux |


* XPE: Windows® XP Embedded

Packing List

- 1 x quick manual
- 1 x driver CD
- 1 x screws pack
- 4 x foot pad
- 8 x HDD anti-vibration damper

Features

- Socket G2 (rPGA 988B) for 2nd Generation Intel® Core™ i7/ i5/ i3 processors (Sandy Bridge)/ Celeron® processor TDP under 35W
- Fanless operation design with full feature I/O
- High performance DDR3-1066/1333 SO-DIMM max. up to 16 GB
- 2 2.5" SATA drive bays and 1 CFast™ slot
- 1 internal PCI Express Mini Card slot

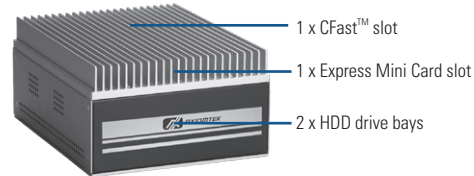

▲ Rear view

Power Protection

DC Version

OCP (over current protection)
SCP (short circuit protection)

Ordering Information

Standard


eBOX640-860-FL-DC Fanless embedded system with socket G2 Intel® Core™ i7/ i5/ i3/ Celeron® processor, VGA, HDMI, DisplayPort, 2 10/100/1000Mbps, 4 RS-232, 6 USB, dual HDD support and DC-in

Optional

2.5" SATA HDD 40 GB or above
2.5" SATA SSD 4 GB or above
DDR3 SODIMM 1 GB ~ 8 GB
CFast™ 512 MB or above
Wall mount bracket
Power cord
AC power kit

*Specifications and certifications are based on options and may vary.

Dimensions

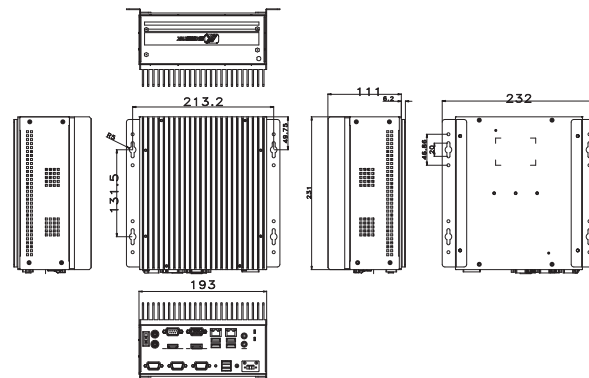

* All specifications and photos are subject to change without notice.