

STRADA-IP-2X6-VSM

IESNA Type V (square) beam for wide area lighting such as car parks


TECHNICAL SPECIFICATIONS:

Dimensions	173.0 x 71.4 mm
Height	8 mm
Fastening	screw
Colour	clear
Box size	476 x 273 x 247 mm
Box weight	6.6 kg
Quantity in Box	120 pcs
ROHS compliant	yes ⓘ



MATERIAL SPECIFICATIONS:


Component	Type	Material	Colour
STRADA-IP-2X6-VSM	Multi-lens	PMMA	clear
2X6-SEAL25	Seal	Silicone	white

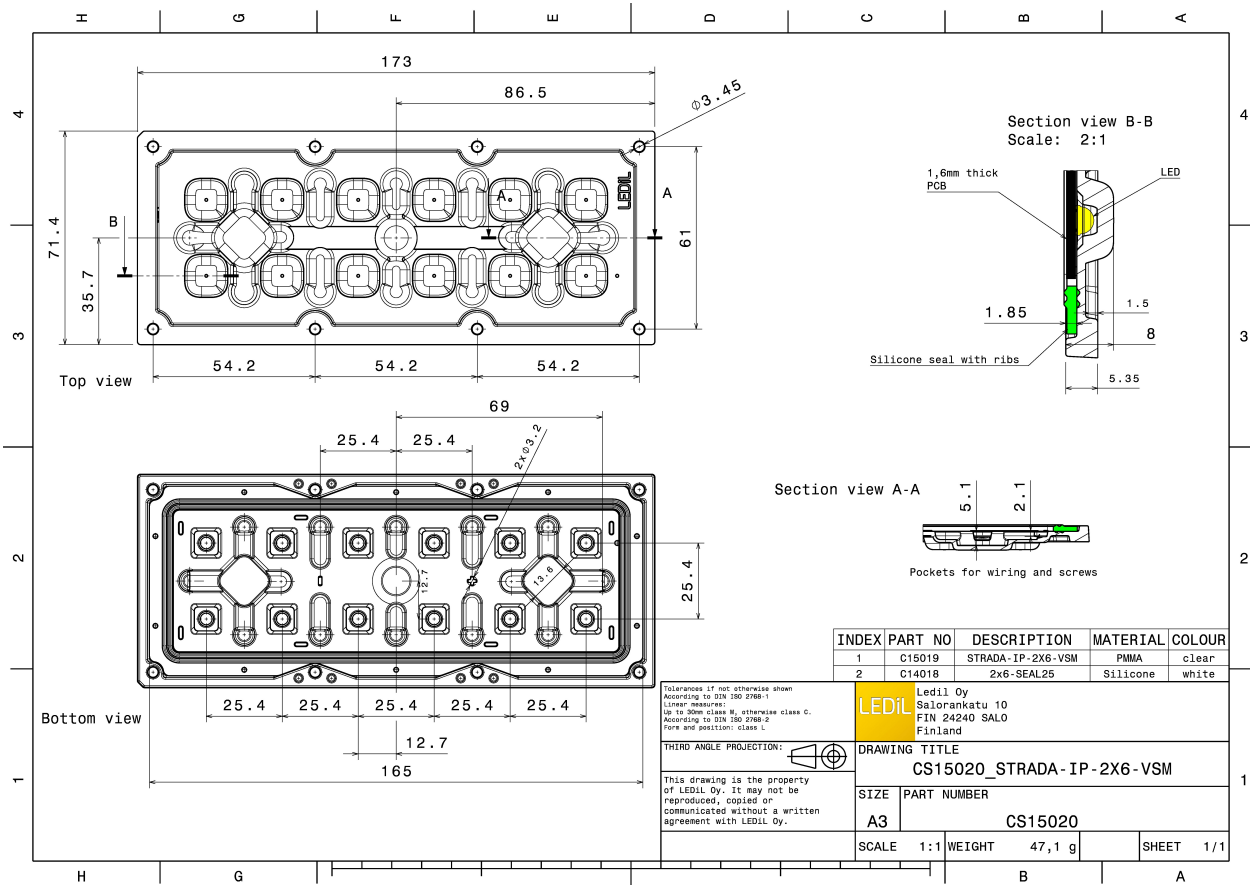


PHOTOMETRIC DATA (MEASURED):





LED Bridgelux SMD 5050
 FWHM 136.0°
 Efficiency 94 %
 Peak intensity 0.350 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

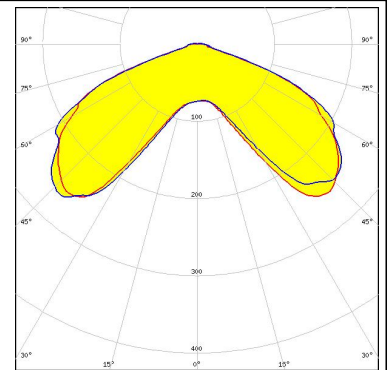


LED QUICK FLUX 2x6 LED XG xxx G7+
 FWHM Asymmetric
 Efficiency 94 %
 Peak intensity 0.460 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

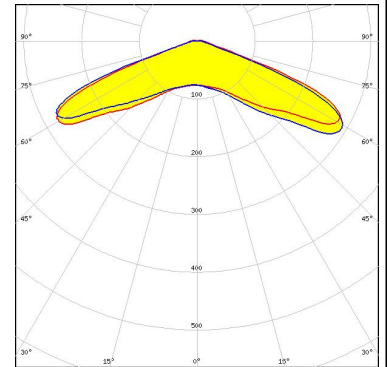

LED XP-G2
 FWHM 140.0°
 Efficiency %
 Peak intensity 0.550 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

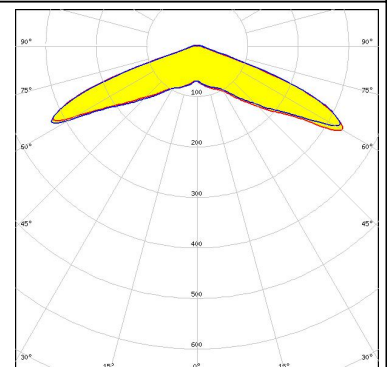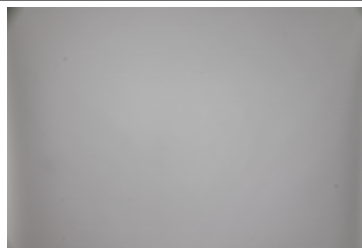


LED XP-G3
 FWHM 141.0°
 Efficiency 94 %
 Peak intensity 0.460 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

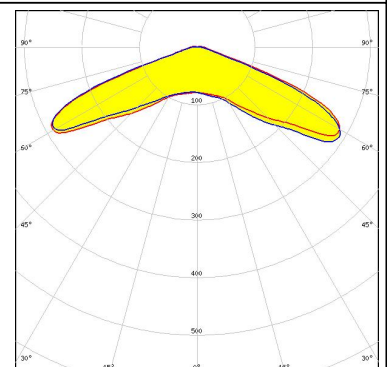


PHOTOMETRIC DATA (MEASURED):




LED XP-L HD
 FWHM 145.0°
 Efficiency 94 %
 Peak intensity 0.410 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

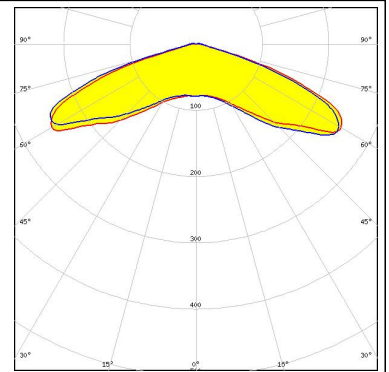


LED XP-L2
 FWHM 142.0°
 Efficiency 94 %
 Peak intensity 0.380 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

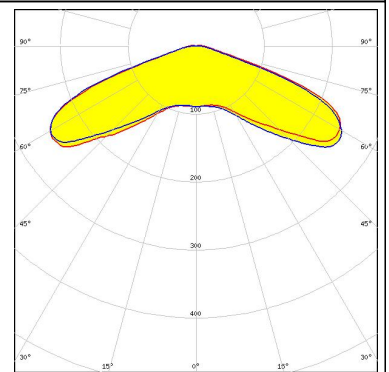

LED XT-E
 FWHM 142.0°
 Efficiency 94 %
 Peak intensity 0.470 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

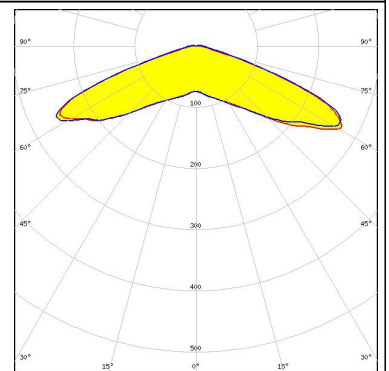


LED H35C1 (LEMWA33)
 FWHM 140.0°
 Efficiency 94 %
 Peak intensity 0.520 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

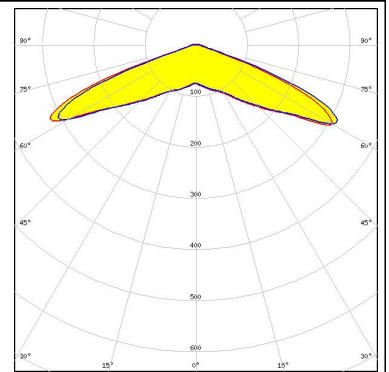

PHOTOMETRIC DATA (MEASURED):


LUMILEDS

LED LUXEON T
FWHM 137.0°
Efficiency 94 %
Peak intensity 0.540 cd/lm
LEDs/each optic 1
Light colour White
Required components:

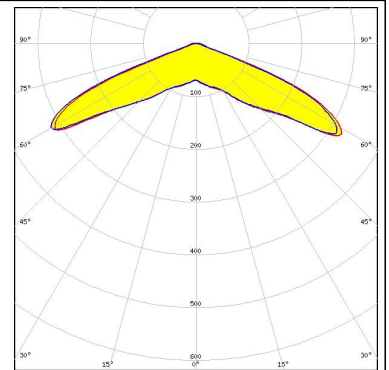


LUMILEDS

LED LUXEON V
FWHM 139.0°
Efficiency 94 %
Peak intensity 0.400 cd/lm
LEDs/each optic 1
Light colour White
Required components:

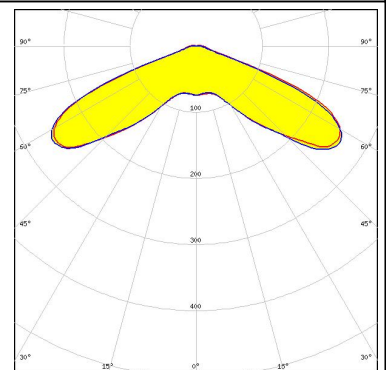


LUMILEDS

LED LUXEON V2
FWHM 136.0°
Efficiency 94 %
Peak intensity 0.500 cd/lm
LEDs/each optic 1
Light colour White
Required components:

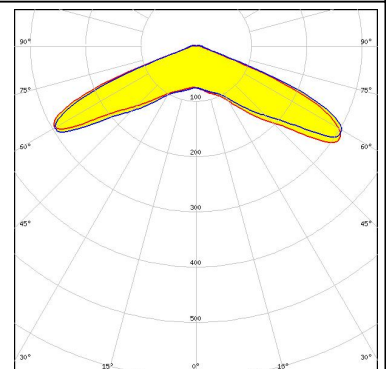

LUMILEDS


LED LUXEON XR-TX (L2T0-xyyy012M)
FWHM 137.0°
Efficiency 94 %
Peak intensity 0.540 cd/lm
LEDs/each optic 1
Light colour White
Required components:

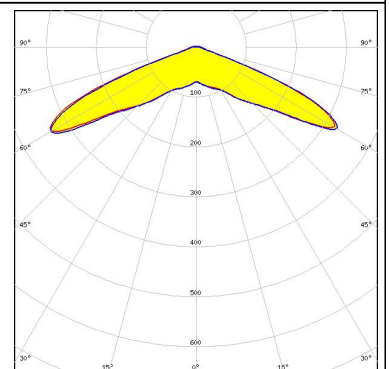


PHOTOMETRIC DATA (MEASURED):




LED NVSW319B
 FWHM 145.0°
 Efficiency 94 %
 Peak intensity 0.500 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

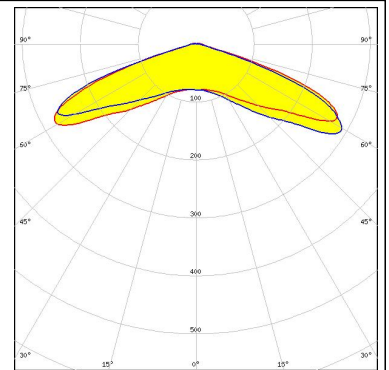



LED NVSW3x9A
 FWHM 140.0°
 Efficiency 94 %
 Peak intensity 0.430 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

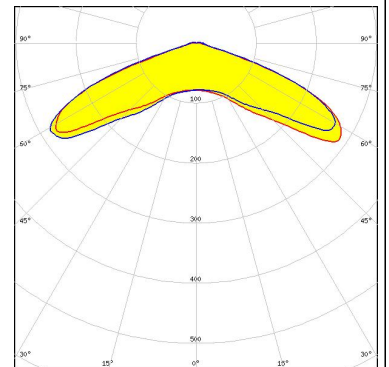

LED NVSxx19B/NVSxx19C
 FWHM 140.0°
 Efficiency 94 %
 Peak intensity 0.500 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

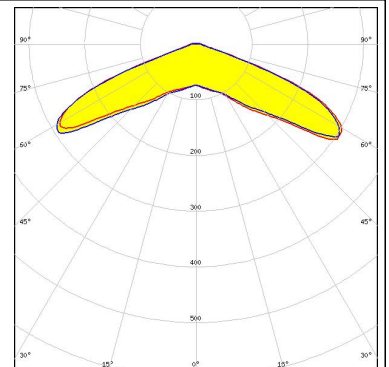


LED Duris S8
 FWHM 137.0°
 Efficiency 94 %
 Peak intensity 0.370 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

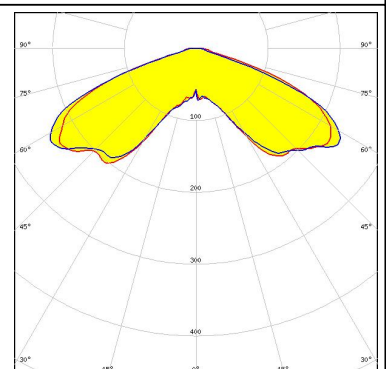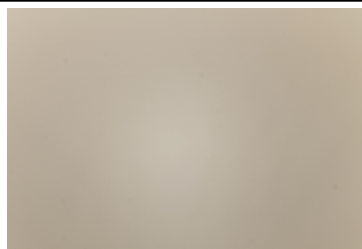

PHOTOMETRIC DATA (MEASURED):


PHILIPS

LED Fortimo FastFlex LED 2x6 DP G4
 FWHM 140.0°
 Efficiency 94 %
 Peak intensity 0.550 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

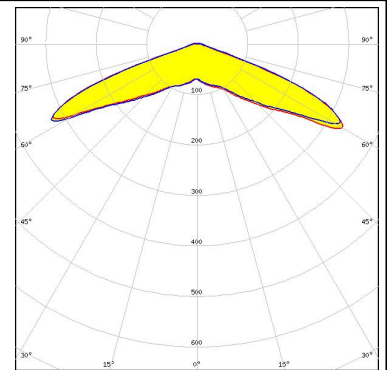


SAMSUNG

LED HiLOM RH12 (LH351C)
 FWHM 140.0°
 Efficiency 94 %
 Peak intensity 0.480 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

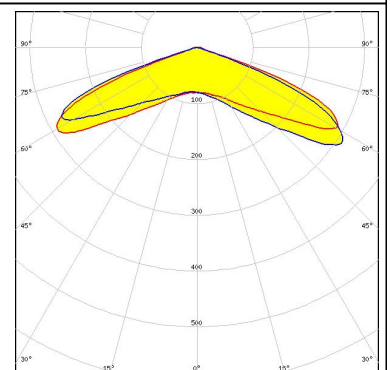


SEOUL SEMICONDUCTOR

LED 2x6 5050 module - SMJD-3625012F-XX
 FWHM 135.0°
 Efficiency 94 %
 Peak intensity 0.370 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

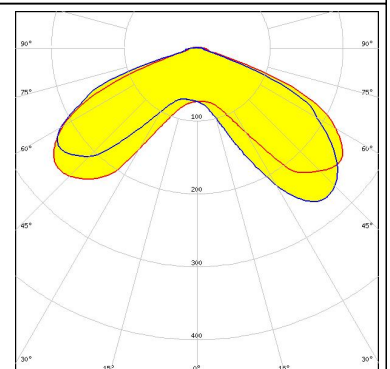

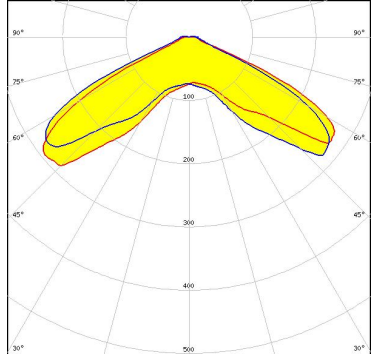
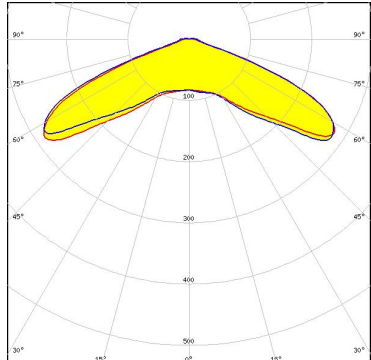
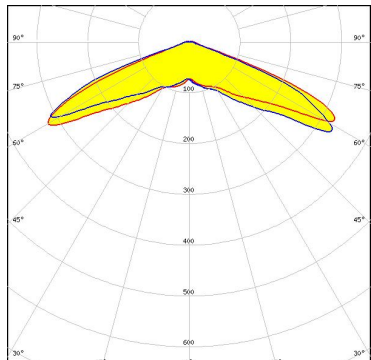


SEOUL SEMICONDUCTOR

LED SMJQ-D36W12Mx
 FWHM 131.0°
 Efficiency 94 %
 Peak intensity 0.470 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

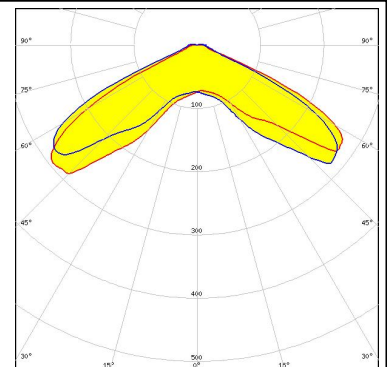


PHOTOMETRIC DATA (MEASURED):
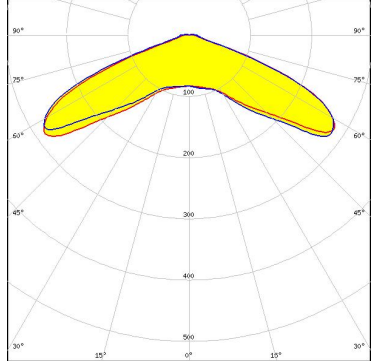
<p>SEOL SEOUL SEMICONDUCTOR</p> <p>LED SMJQ-D36W12Px FWHM 137.0° Efficiency 94 % Peak intensity 0.460 cd/lm LEDs/each optic 1 Light colour White Required components:</p>		
<p>SEOL SEOUL SEMICONDUCTOR</p> <p>LED Z8Y22 FWHM 131.0° Efficiency 94 % Peak intensity 0.470 cd/lm LEDs/each optic 1 Light colour White Required components:</p>		
<p>SEOL SEOUL SEMICONDUCTOR</p> <p>LED Z8Y22P FWHM 137.0° Efficiency 94 % Peak intensity 0.460 cd/lm LEDs/each optic 1 Light colour White Required components:</p>		
<p>TRIDONIC</p> <p>LED RLE 2x6 3000lm HP EXC2 OTD FWHM 138.0° Efficiency 94 % Peak intensity 0.560 cd/lm LEDs/each optic 1 Light colour White Required components:</p>		


PHOTOMETRIC DATA (SIMULATED):




LED XHP35 HD
 FWHM 157.0°
 Efficiency 93 %
 Peak intensity 0.280 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

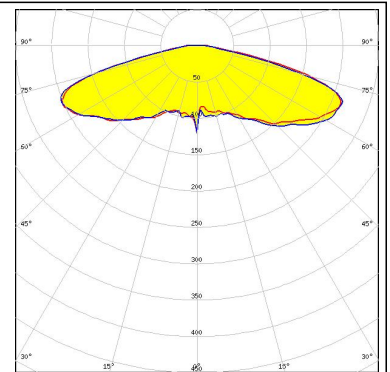


LED LUXEON 5050
 FWHM 139.0°
 Efficiency 82 %
 Peak intensity 0.290 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:
 Undefined Manufacturer: Protective Plate, Glass

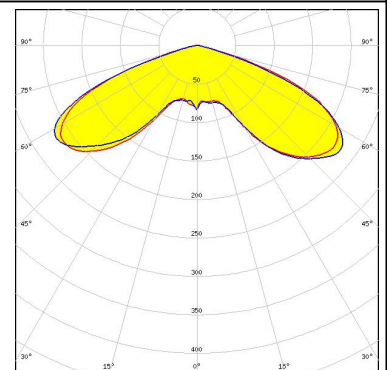

LED LUXEON 5050
 FWHM 143.0°
 Efficiency 92 %
 Peak intensity 0.320 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

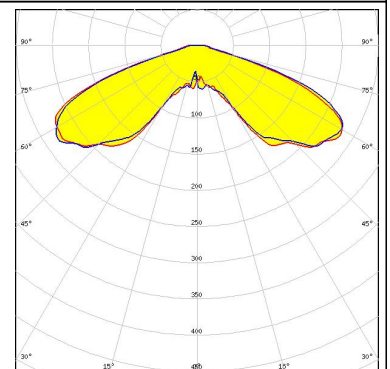

LED NVSxE21A
 FWHM 136.0°
 Efficiency 93 %
 Peak intensity 0.520 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

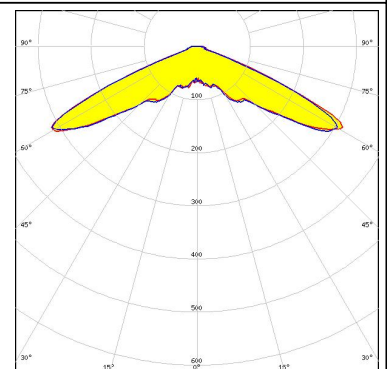


PHOTOMETRIC DATA (SIMULATED):

OSRAM

Opto Semiconductors


LED OSCONIQ P 3737 (3W version)
 FWHM Asymmetric
 Efficiency 94 %
 Peak intensity 0.380 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

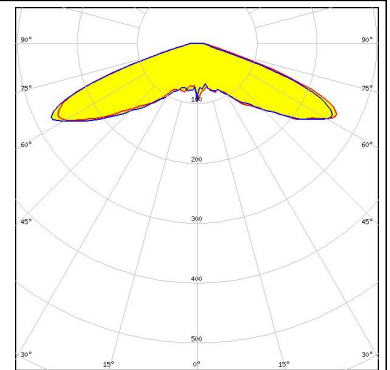

OSRAM

Opto Semiconductors


LED Oslon Square Gen3
 FWHM 142.0°
 Efficiency 91 %
 Peak intensity 0.400 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

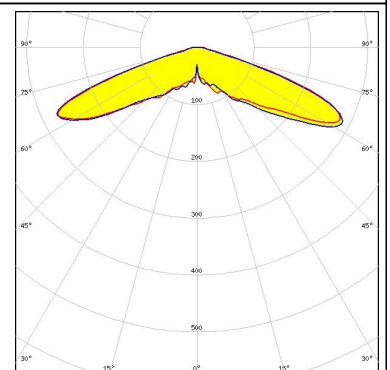

OSRAM


Opto Semiconductors

LED Oslon SSL 150
 FWHM 145.0°
 Efficiency 93 %
 Peak intensity 0.430 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

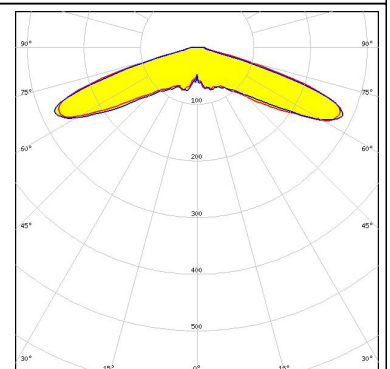

PHILIPS


LED Fortimo FastFlex LED 2x6 DPX G4
 FWHM 144.0°
 Efficiency 89 %
 Peak intensity 0.380 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

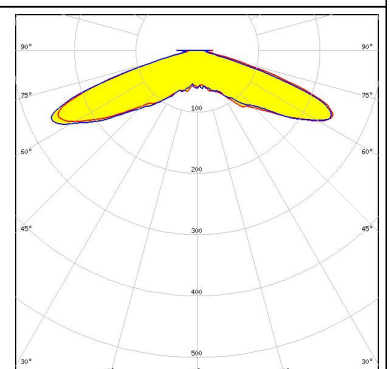

PHOTOMETRIC DATA (SIMULATED):


SAMSUNG

LED LH351C
FWHM Asymmetric
Efficiency 94 %
Peak intensity 0.410 cd/lm
LEDs/each optic 1
Light colour White
Required components:

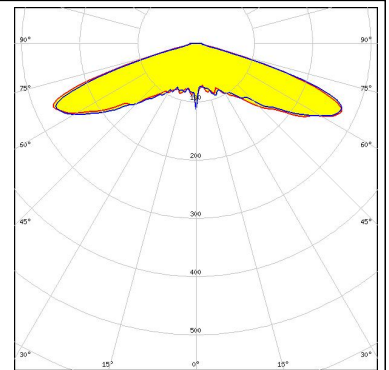


SAMSUNG

LED LH351D
FWHM 156.0°
Efficiency 94 %
Peak intensity 0.330 cd/lm
LEDs/each optic 1
Light colour White
Required components:

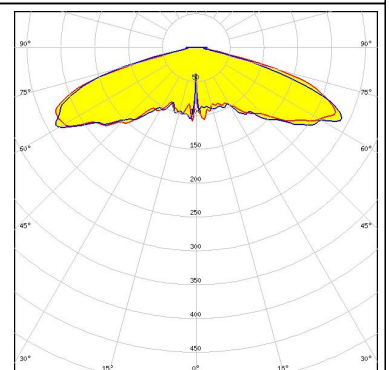

SEOUL SEMICONDUCTOR

LED Z5M1/Z5M2
FWHM 131.0°
Efficiency 92 %
Peak intensity 0.510 cd/lm
LEDs/each optic 1
Light colour White
Required components:

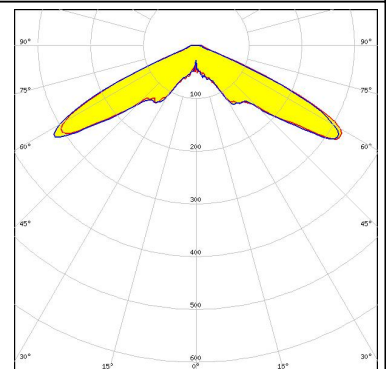

GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

LEDiL Oy

Joensuunkatu 13
FI-24240 SALO
Finland

LEDiL Inc.

228 West Page Street
Suite D
Sycamore IL 60178
USA

Local sales and technical support

[www.ledil.com/
where_to_buy](http://www.ledil.com/where_to_buy)

Shipping locations

Salo, Finland
Hong Kong, China

Distribution Partners

[www.ledil.com/
where_to_buy](http://www.ledil.com/where_to_buy)