

- Features :
- *2:1 wide input range
- *Protections: Short circuit / Overload / Over voltage/Reverse polarity
- *1500VAC I/O isolation
- *Cooling by free air convection
- *Built-in EMI filter, low ripple noise
- *100% full load burn-in test
- *Low cost
- *High reliability
- *2 year warranty




SPECIFICATION

MODEL	PSD-30A-5	PSD-30B-5	PSD-30C-5	PSD-30A-12	PSD-30B-12	PSD-30C-12	PSD-30A-24	PSD-30B-24	PSD-30C-24			
OUTPUT	DC VOLTAGE			12V			24V					
	RATED CURRENT			2.5A			1.25A					
	CURRENT RANGE			0 ~ 2.5A			0 ~ 1.25A					
	RATED POWER			30W			30W					
	RIPPLE & NOISE (max.) Note.2			120mVp-p			150mVp-p					
	VOLTAGE ADJ. RANGE			11 ~ 13.5VDC			22 ~ 26VDC					
	VOLTAGE TOLERANCE Note.3			±1.0%			±1.0%					
	LINE REGULATION			±1.0%			±1.0%					
	LOAD REGULATION			±1.0%			±1.0%					
SETUP, RISE, HOLD UP TIME 2s, 50ms, ----- at full load												
INPUT	VOLTAGE RANGE A:9 ~ 18VDC B:18 ~ 36VDC C:36 ~ 72VDC											
	EFFICIENCY (Typ.)			77%	79%	80%	77%	80%	82%	78%	83%	83%
	DC CURRENT			4.5A/12V			2.5A/24V			1.1A/48V		
PROTECTION	OVERLOAD 105 ~ 150% rated output power Protection type : Hiccup mode, recovers automatically after fault condition is removed											
	OVER VOLTAGE			6 ~ 7.5V			14 ~ 16.5V			27 ~ 32.5V		
	Protection type : Hiccup mode, recovers automatically after fault condition is removed											
REVERSE POLARITY By internal fuse open												
ENVIRONMENT	WORKING TEMP. -20 ~ +60°C (Refer to output load derating curve)											
	WORKING HUMIDITY 20 ~ 90% RH non-condensing											
	STORAGE TEMP., HUMIDITY -20 ~ +85°C, 10 ~ 95% RH											
	TEMP. COEFFICIENT ±0.03%/°C (0 ~ 50°C)											
	VIBRATION 10 ~ 500Hz, 2G 10min./1cycle, 60min. each along X, Y, Z axes											
SAFETY & EMC (Note 4)	SAFETY STANDARDS Design refer to LVD											
	WITHSTAND VOLTAGE I/P-O/P:1.5KVAC I/P-FG:1.5KVAC O/P-FG:0.5KVAC											
	ISOLATION RESISTANCE I/P-O/P, I/P-FG, O/P-FG:100M Ohms/500VDC											
	EMI CONDUCTION & RADIATION Compliance to EN55022 (CISPR22) Class B											
OTHERS	EMS IMMUNITY Compliance to EN61000-4-2,3,4,6,8; ENV50204, EN 55024, light industry level, criteria A											
	MTBF 902.4K hrs min. MIL-HDBK-217F(25°C)											
	DIMENSION			101.6*50.8*30mm (L*W*H)								
PACKING			0.15kg: 72pcs/10.8kg/0.82CUFT									
NOTE	1. All parameters NOT specially mentioned are measured at 12,24,48VDC input, rated load and 25°C of ambient temperature. 2. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 47uf parallel capacitor. 3. Tolerance : includes set up tolerance, line regulation and load regulation. 4. The power supply is considered a component which will be installed into a final equipment. The final equipment must be re-confirmed that it still meets EMC directives. (As available on http://www.meanwell.com)											

■ Mechanical Specification

Unit:mm

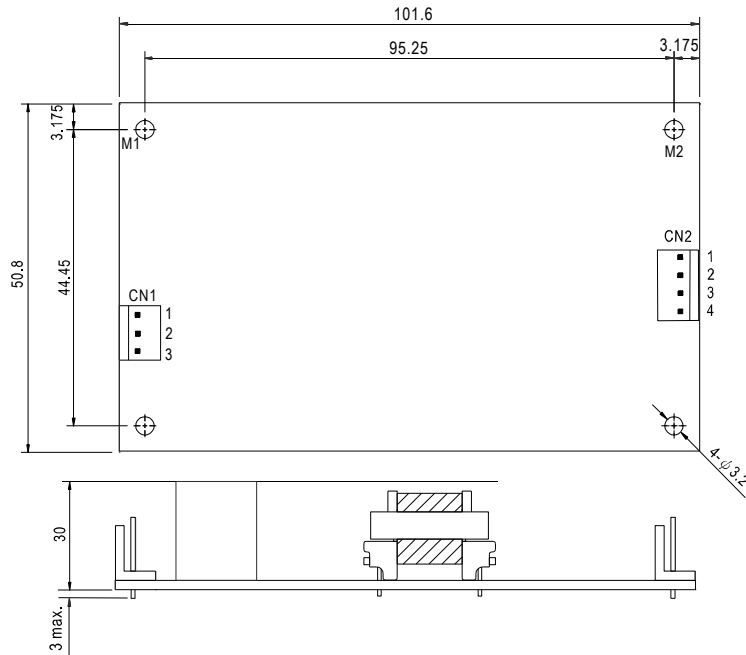


DC Input Connector (CN1) : JST B3P-VH-B or equivalent

Pin No.	Assignment	Mating Housing	Terminal
1	DC-	JST VHR or equivalent	JST SVH-21T-P1.1 or equivalent
3	DC+		
2	NC		

DC Output Connector (CN2) : JST B4P-VH-B or equivalent

Pin No.	Assignment	Mating Housing	Terminal
1,2	+V	JST VHR or equivalent	JST SVH-21T-P1.1 or equivalent
3,4	-V		

■ Block Diagram

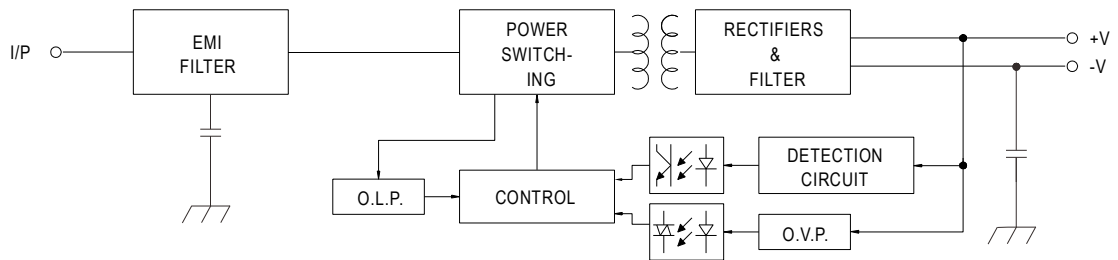

■ Derating Curve

