
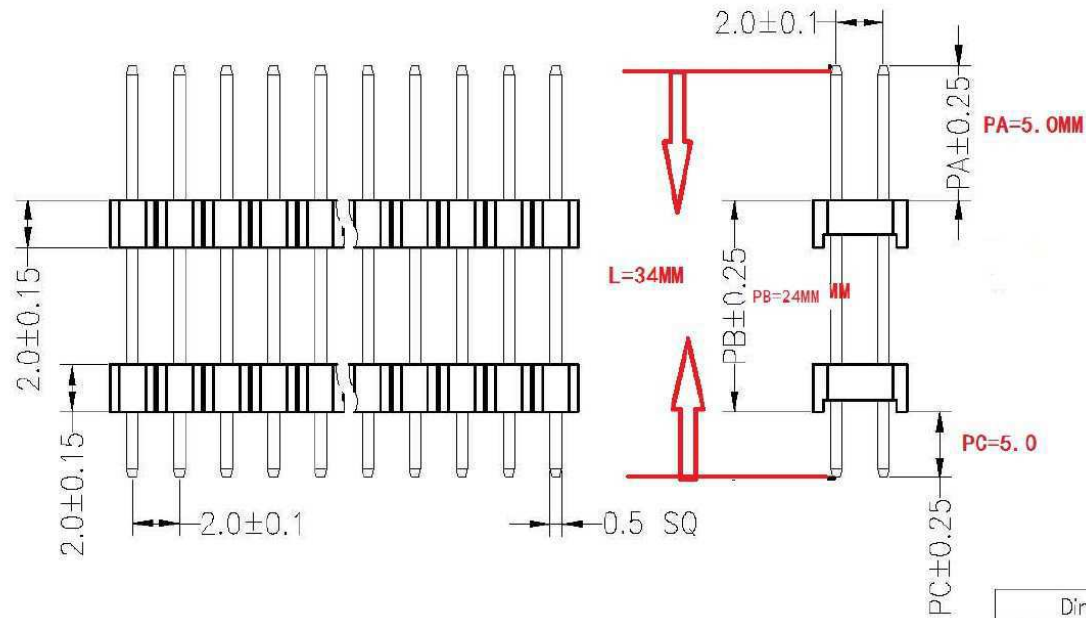
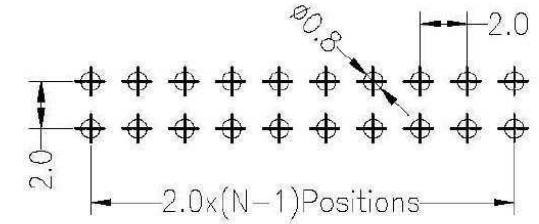


**SPECIFICATIONS**

Rated Current:1.5AMP  
 Contact Resistance:20mΩ Max  
 Withstand Voltage:500V AC/DC  
 Insulation Resistance:1000MΩ Min  
 Operation Temperature:-40°C to +105°C

Contact Material:Brass  
 Contact Plating:Au or Sn Over Ni  
 Insulator Material:Polyester(UL94V-0)  
 Standard: PA6T  
 Max.Processing Temp: 230°C for 30-60 seconds  
 (260°C for 5 seconds)

Recommended P.C.B Layout(Top Side)  
 (PCB BOARD TOLERANCE±0.05)

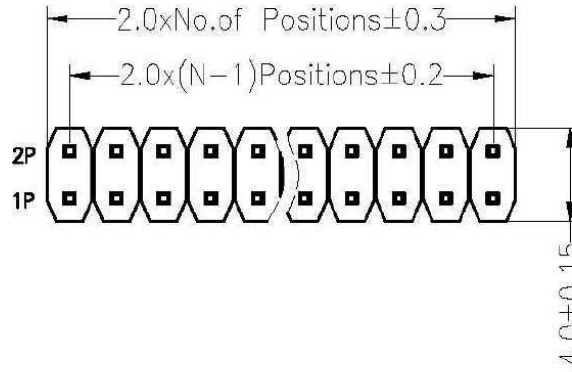

Dimension antitheses list				
ITEM	PA	PB	PC	L
Standard	5MM	24MM	5MM	34MM
Alternate				

				OPERATION		DRAW		SCALE		FIT		<b>CONNTHERM</b>		
				X.X	±0.30			UNIT	mm					
				X.XX	±0.20	CHECK		SIZE	A4					
				X.XXX	±0.10			SHEET	1/1					
AD	NEW DRAWING			Angle		±J	APPROVE				PART NO.	PLMDP20S34		
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	DIM		TOL			TITLE:		2.0PH 2xNpin 2*H2.0mm 180°		