




VGA (Dsub)



DVI



HDMI x2




Display Characteristics

Model No.	NTI460	Resolution	1920x1080 (Full HD)
Active Screen Size	46.0 inch	Display Ratio	16:9
Active Area	1018.08x572.67 mm	Brightness	500 cd/m ²
Pixel Pitch	0.53025x0.53025 mm	Contrast Ratio	4000:1
Backlight Unit	LED	Viewing Angle (L/R/U/D)	89°/89°/89°/89°
Display Colors	1073.7M colors	Response Time	6.5 msec
Operating Temp.	0-50 °C	Surface Treatment	Anti-Glare, Haze=11%

General Specification

Speaker	10Wx2	Display interface	VGAx1, DVIX1, HDMIX2
Wall mount	40x40 CM	Other connectors	Audio-in, DC-in, USB input
Housing Material	Galvanized Steel (SECC)		

Dimension

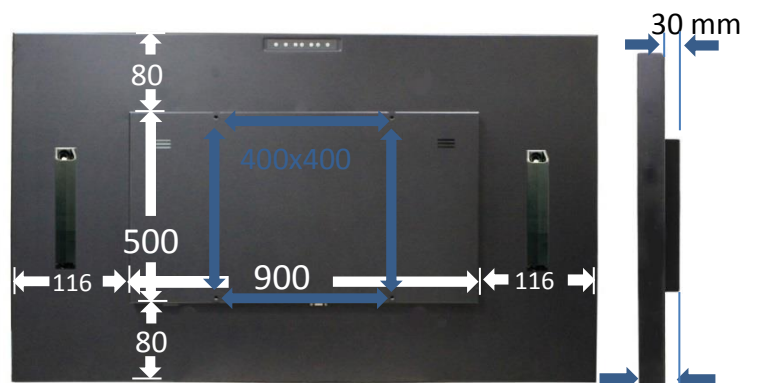

W/O touch 80



Features :

- ★ **Multi-touch**
- ★ **Plug and play**
- ★ **10W x2 Speaker in front**
- ★ **Remote control**
- ★ **Matel enclosed cabinet**
- ★ **Allowed customized design**
- ★ **USB Input : Automatically play the multimedia content via USB pendrive. (No need PC)**

USB Multimedia Playback Format

Movie	.avi .mpg .dat .vob .mov .mkv .rm .rmvb .mp4 .mjpeg .ts .trp .wmv .asf .flv
Picture	.jpg .bmp .png
Music	.mp3 .m4a

Touch Specification (option)

Type	No Touch	Model No.	NTI4600
Dimension	1132x660x80 mm	Net Weight	28 KG

Type	I.R	Model No.	NTI460I
Allowed touch points	Unlimited points	Touch Accuracy	<2mm, no drift
Tempered Glass Treatment	Hardness 7H, AG	Sensed Size	≥5 mm
Report Resolution	32768x32768	Interface	USB
Dimension	1132x660x94 mm	Net Weight	29 KG

Type	ELO S.A.W	Model No.	NTI460S
Allowed touch points	2	Touch Accuracy	<2mm, no drift
Tempered Glass Treatment	Hardness 7H, AG	Sensed Size	≥5 mm
Report Resolution	32768x32768	Interface	USB
Dimension	1132x660x95 mm	Net Weight	29 KG


Note :

1. Touch function and media playback function can't work at the same time.
2. Touch function requires a PC or other device, the media playback function requires an USB pen-drive.
3. 6 touch points plug and play, supports unlimited touch points after driver installing.


Other Customized Options

Brightness	700 cd/m ²	Water Proof	Surface Splash Proof
Surface Protection	Tempered glass	Color	Any Color (MOQ requested)
Coating Film	AG/AR/AF		

Open-frame Brackets (option)

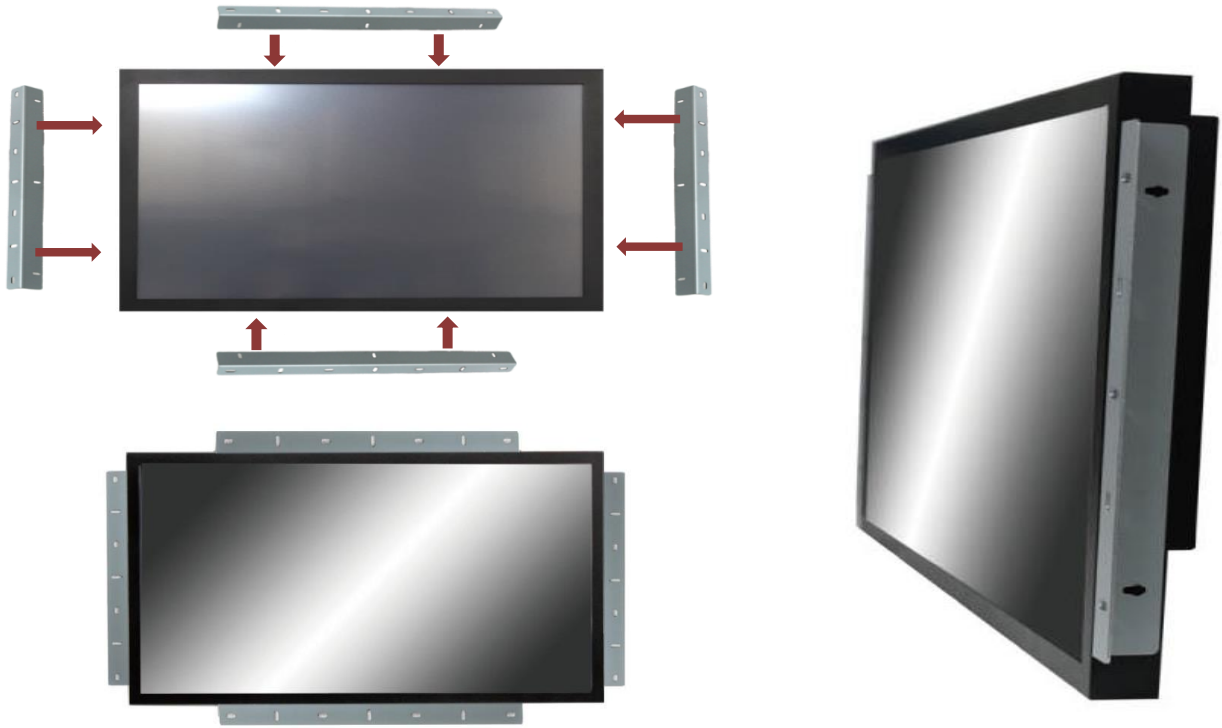

Wall Mount Brackets (option)

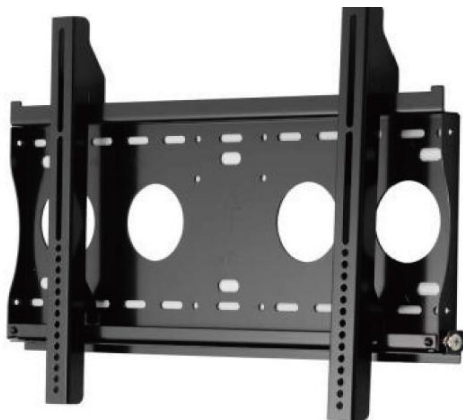

Cart Stand (option)

