


FILE: 2016-D02UL10	6	5	4	3	2	1
REV: V0.0	ECN NO.	CONTENT	CHK	DATE		
		插板架	ZCP	2016.11.24		

NOTES:

- Rating: <UL> 250V/2A  
<IEC> 250V/2A
- Poles: 06P
- Insulation Withstands Voltage: AC2000V/1 Min
- Insulation Resistance: 500M $\Omega$  at DC500V
- Using Temperature Range: -40°C/+115°C
- Max soldering : +250° for 5S
- RoHS Compliance.
- Suitable Electric Wire: 24-20AWG(U) 0.2-0.5mm<sup>2</sup> (IEC)
- 9 With" ★ "is important dimension

How to order  
**UL0-TB12 - 250B/2.5 - 02P - 1 0 0 0A**

Certificate Factory poles color: Customer requirements  
 Series NO. Code 1:Grey 2:Blue 3:Black 4:Green 5:Orange 6:Red 7:transparent 8:Yellow 9:White

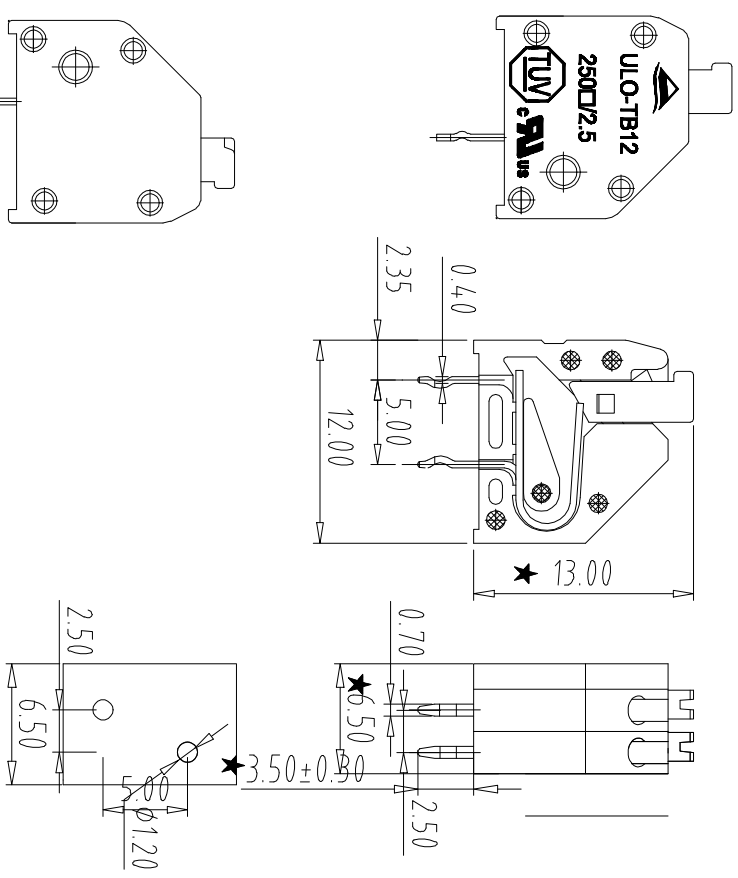

Total Pitch Tolerances		Nominal dimension range	
in mm		in mm	
0	30	0	30
10	53	10	53
20	78	20	78
30	98	30	98
40	115	40	115
50	135	50	135
60	150	60	150
70	165	70	165
80	180	80	180
90	195	90	195
100	210	100	210
110	225	110	225
120	240	120	240
130	255	130	255
140	270	140	270
150	285	150	285
160	300	160	300
170	315	170	315
180	330	180	330
190	345	190	345
200	360	200	360
210	375	210	375
220	390	220	390
230	405	230	405
240	420	240	420
250	435	250	435
260	450	260	450
270	465	270	465
280	480	280	480
290	495	290	495
300	510	300	510

5	SHORT-PIN	3001B0020	N/2	Phosphor bronze	Tin Plated
4	LONG-PIN	3001B0010	N/2	Phosphor bronze	Tin Plated
3	LEVER	3001D0Y00A	N	PA66	UL94V-0
2	Cover	3001C0Y00A	1	PA66	UL94V-0
1	Housing	3001A0YXXA	N	PA66	UL94V-0
DWG	Liu Lidan	DATE	19.09.12	UNITS	MM
CHK		DATE		SCALE	1:1
APP.		DATE		NAME	UL0-TB12-250B/2.5-02P-1000A
				DWGNO	UL0TB12Y000A



NINGBO UL0 ELECTRONICS CO.,LTD.  
 宁波欧路电子有限公司