


OPS500-501

Open Pluggable Specification (OPS) Digital Signage Player with 6th Generation Intel® Core™ i7/i5/i3 & Celeron® Processor, Intel® Q170 and iAMT 11.0



- | | | |
|---------------------|---------------------|-----------------------|
| 1. JAE TX-25A | 6. Power switch | 11. USB 2.0 x 1 |
| 2. Optional antenna | 7. Reset | 12. USB 3.0 x 2 |
| 3. RS-232 | 8. HDD indicator | 13. Optional antenna |
| 4. Ethernet | 9. Audio (Line-out) | 14. 2.5" SATA HDD |
| 5. HDMI output | 10. Audio (Mic-in) | 15. 12VDC power input |

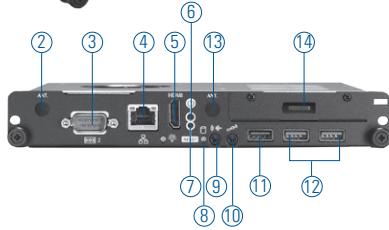

Specifications


| | | |
|--------------------|--|--|
| Main System | CPU | LGA1151 socket L 6th generation Intel® Core™ i7/i5/i3 & Celeron® processor (Skylake) |
| | Chipset | Intel®Q170 |
| | System Memory | 1 x 260-pin DDR4-2133 SO-DIMM max. up to 16GB |
| | Storage | 1 x 2.5" SATA HDD tray 1 x mSATA (option) |
| | Watchdog Timer | 255 levels, 1-255 sec. |
| I/O | 2 x USB 3.0 1 x USB 2.0 1 x 10/100/1000 Mbps Ethernet (Intel® i219LM) 1 x HDMI with 4K resolution 1 x RS-232 (COM 2) 1 x Power on/off button 1 x Reset button 1 x Audio (Line-out) 1 x Audio (Mic-in) 1 x DisplayPort (4K@60Hz via OPS JAE interconnector) 1 x HDMI 2.0 (4K@60Hz via OPS JAE interconnector) 2 x USB 2.0 (via OPS JAE interconnector) 1 x USB 3.0 (via OPS JAE interconnector) 1 x Audio (Line out, via OPS JAE interconnector) 1 x UART (TX/RX, via OPS JAE interconnector) (COM1) 1 x 12VDC PWR input by adapter option | |
| Indicator | 1 x LED for system power ON 1 x LED for HDD active | |
| WiFi | Optional 802.11 b/g/n | |
| Expansion Slot | 1 x Full-size PCI Express Mini card (USB + PCI Express + SATA signal) | |
| Dimensions | 200 mm (7.87") (W) x 119 mm (4.68") x 30 mm (1.18") | |
| Packing Dimension | 270 mm (10.63") (W) x 197 mm (7.76") x 70mm (2.76") | |
| Weight (net/gross) | 1 kg (2.21lb)/1.5 kg (3.3 lb) | |
| Environmental | 0°C ~ +45°C (+32°F ~ +113°F) (with airflow 1.2m/s) | |

Packing

- 1 x Driver CD
- 1 x Thermal grease
- 2 x M2 x 5 screw
- 2 x M4 x 6 screw

Features

- Intel® Open Pluggable Specification (OPS compliance)
- 6th generation Intel® Core™ i7/i5/i3 & Celeron® processors (Skylake)
- Supports DDR4-2133 SO-DIMM max. up to 16GB
- Supports 1 PCI Express Mini Card slot
- Supports 4K@60Hz resolution
- Easy installation and maintenance
- HDMI for 2nd Ultra HD display
- Intel® AMT (Active Management Technology) 11.0

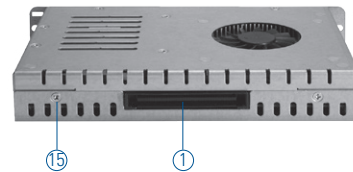

Optional OS Installation

Windows® 8.1, Windows® 10

Ordering Information

Standard


OPS500-501 OPS digital signage player with LGA1151 socket Intel® Core™ i7/i5/i3 & Celeron® processors with iAMT 11.0

Optional

AX93167 OPS docking board with 4K resolution
AX93190 OPS docking board with 4K/60Hz resolution

* Specifications and photos are based on options and may vary

Dimensions

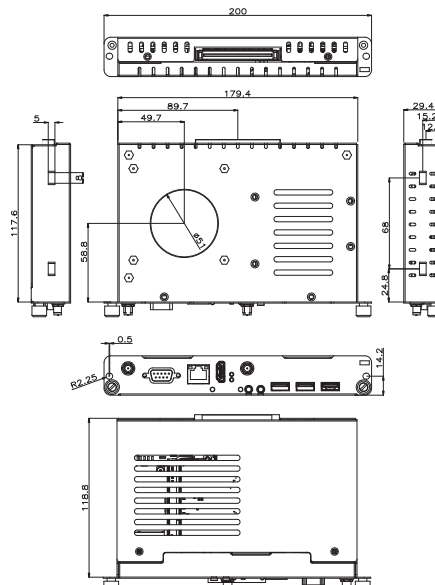

Updated September 23, 2016. * All specifications and photos are subject to change without notice.