HSF RoHS

FILE NO:E362810

SPECIFICATIONS
Rated Current:1.5AMP
Contact Resistance:20mΩ Max
Withstand Voltage:500V AC/DC
Insulation Resistance:1000MΩ Min
Operation Temperature:-40°c to +105°c

Contact Material:Brass
Contact Plating:Au or Sn Over Ni
Insulator Material:Polyester(UL94V-0)
Standard: PA6T
Max.Processing Temp: 230°C for 30-60 seconds
(260°C for 5 seconds)

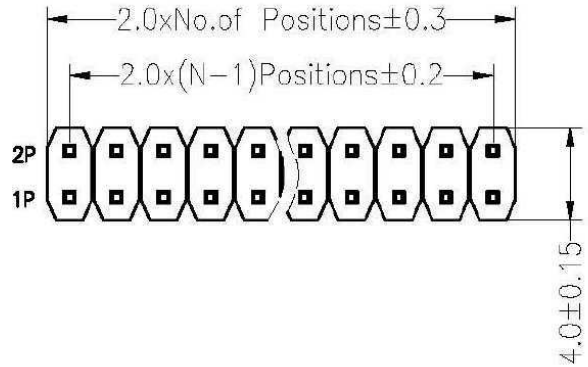

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

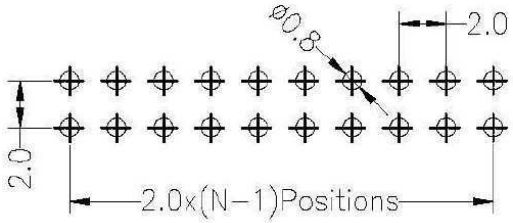

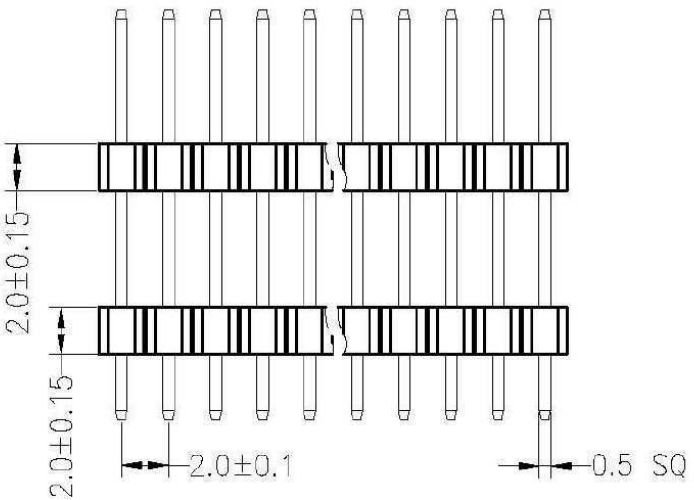

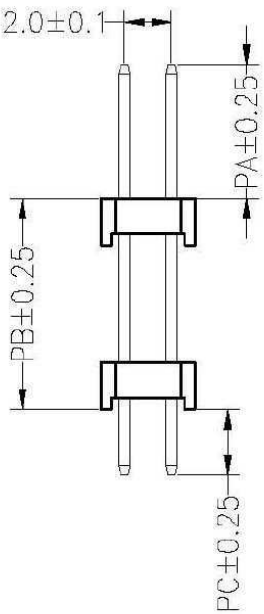

Dimension antitheses list				
ITEM	PA	PB	PC	L
Standard	6.0	12.4	3.0	21.4
Alternate				

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0		NEW DRAWING	

OPERATION		DRAW	CHECK	APPROVE
X.X	±0.30			
X.XX	±0.20			
X.XXX	±0.10			
Angle	±3°			
DIM	TOL			

SCALE	FIT
UNIT	mm
SIZE	A4
SHEET	1/1
PROJ.	

CONNTHERM

PART NO.	PLMDP04S21
TITLE:	2.0PH 2xNpin 2*H2.0mm 180°