

### Application:

- ✧ Consumer Electronics
- ✧ Home appliances
- ✧ Power Supply device
- ✧ Telecommunication System
- ✧ Automotive Device
- ✧ Industrial Equipment
- ✧ Medical Equipment
- ✧ Battery Charging Device




### Naming Rule:

<b>F</b>	<b>2410</b>	<b>B</b>	<b>-</b>	<b>xxA</b>
1	2	3		4

1. F-Fast Acting, T-Time Lag
2. Dimensions
3. Rated Voltage  
(A-125V B-250V C-300V)
4. Rated Current

### Structure:(Unit:mm)

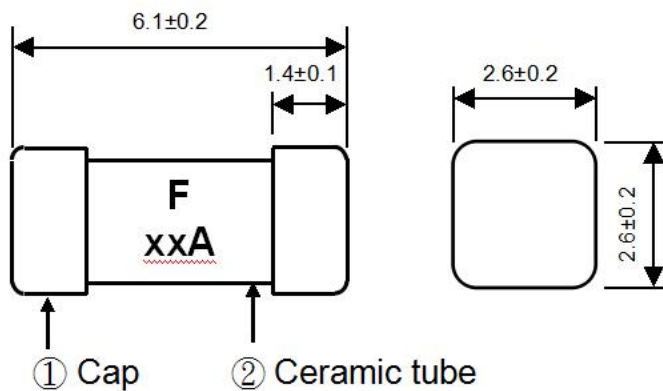

NO.	Position	Material	Quantity
①	Cap	Silver Plated Brass	2
②	Body	Ceramic tube	1

## Electrical Specifications:


- ✧ Rated Current: 50mA-10A
- ✧ Rated Voltage :250V AC
- ✧ Breaking Capacity 50mA-10A : 50A@250V AC
- ✧ Operating temperature range : -55°C to 125°C

Ampere Rating	% of Ampere Rating	Opening Time
50mA – 10A	100%	4 hours, Minimum
	200%	5 sec, Maximum

## Product Characteristics:


No.	Item	Contents	Reference standard
1	Insulation Resistance	10,000 ohms minimum	MIL-STD-202G, Method 302 Test ConditionA
2	Solderability	T=235°C±5°C, t=5+0/-0.5s, Cover ≥ 95%	MIL-STD-202G, Method 208H
3	Resistance to Soldering Heat	10 sec at 260°C	MIL-STD-202G, Method 210F Test Condition B
4	Thermal Shock	5 cycles, -65°C to 125°C, 15minutes @each extreme	MIL-STD-202G, Method 107G Test Condition B
5	Mechanical Shock	100G's peak for 6 milliseconds, 3 cycles	MIL-STD-202G, Method 213B Test 1
6	Vibration	0.03" amplitude, 10-55 Hz in 1 min. 2hrs each XYZ=6hrs	MIL-STD-202G, Method 201A
7	Moisture Resistance	10 cycles	MIL-STD-202G, Method 106G
8	Salt spray	48hrs	MIL-STD-202G, Method 101E Test Condition B

### Temperature Derating Curve:

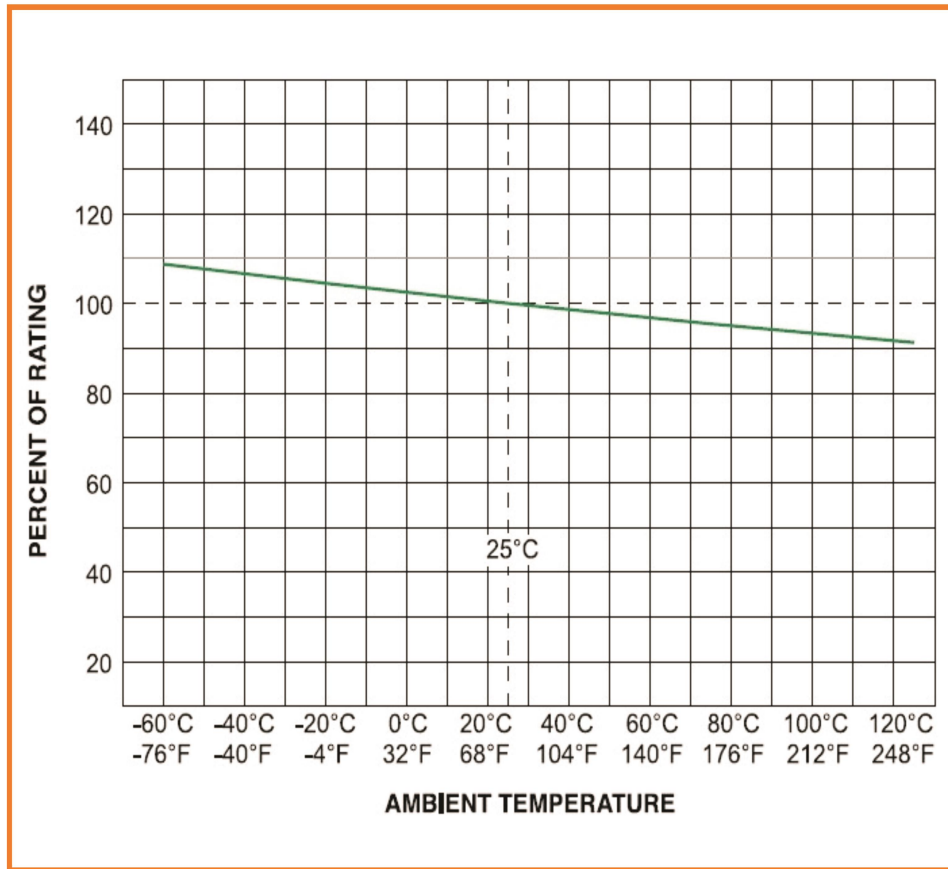

### Recommended Customer Soldering Parameters:

Reflow Condition		Pb-Free assembly
Preheating	Temperature Min $T_s(\text{min})$	150°C
	Temperature Max $T_s(\text{max})$	200°C
	Time Max	120 secs
Soldering	Temperature (TL)(Liquidus)	260°C
	Time Max (TL)	60 secs
	Temperature (TP)	Max 260°C
	Time Max (TP)	10 secs

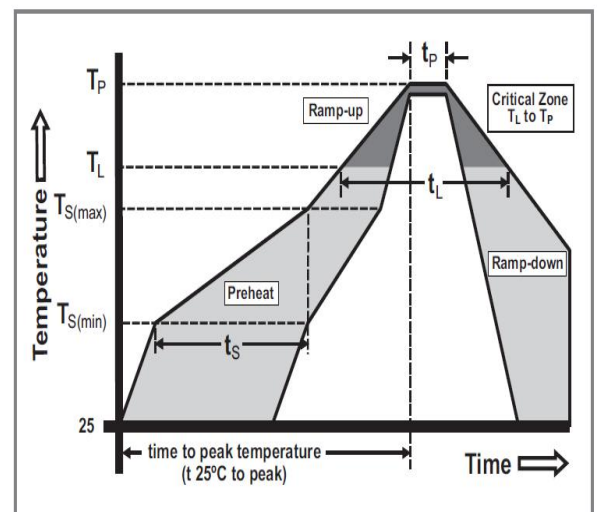

## **Appearance and Configuration:**

- ✧ Appearance : No significant stains, rust or crack, mark should be easy to recognize.
- ✧ Shape: Surface Mount Fuse

## **Packing Information:**

- ✧ MPQ:1000pcs, Tape&Reel

## **CONTACT INFORMATION**

**Shanghai Ecube-Tech Electronics Technology Co., Ltd.**

上海赫品电子科技有限公司

**Email:** Marketing@ecube-tech.com

**Tel:**+86 21 50723288

**Fax:**400 8892 163 Ext. 324988

**Address:** No.245, Jinan Road, Huangpu Area, Shanghai, 200021, China

**Website:** [www.ecube-tech.com](http://www.ecube-tech.com)