
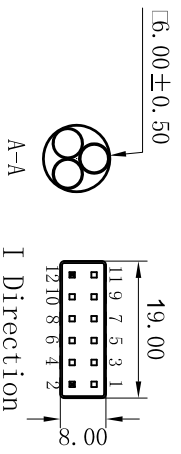


I Direction		
Pin	Signal	Insulation Color Overall Shield
1	Overall Shield	
2	Y + Receive	BLUE
3	Y - Receive	BLUE
4	Y - Transmit	BLACK
5	Y - Receive	BLACK
6	Y - Ground	YELLOW
7	Shield	
8	X - Ground	GREEN
9	X+Receive	WHITE
10	X - Transmit	RED
11	X - Receive	RED
12		

sensor 1	Y-Transmit
sensor 2	Y-Receive
sensor 3	X-Receive
sensor 4	X-Transmit

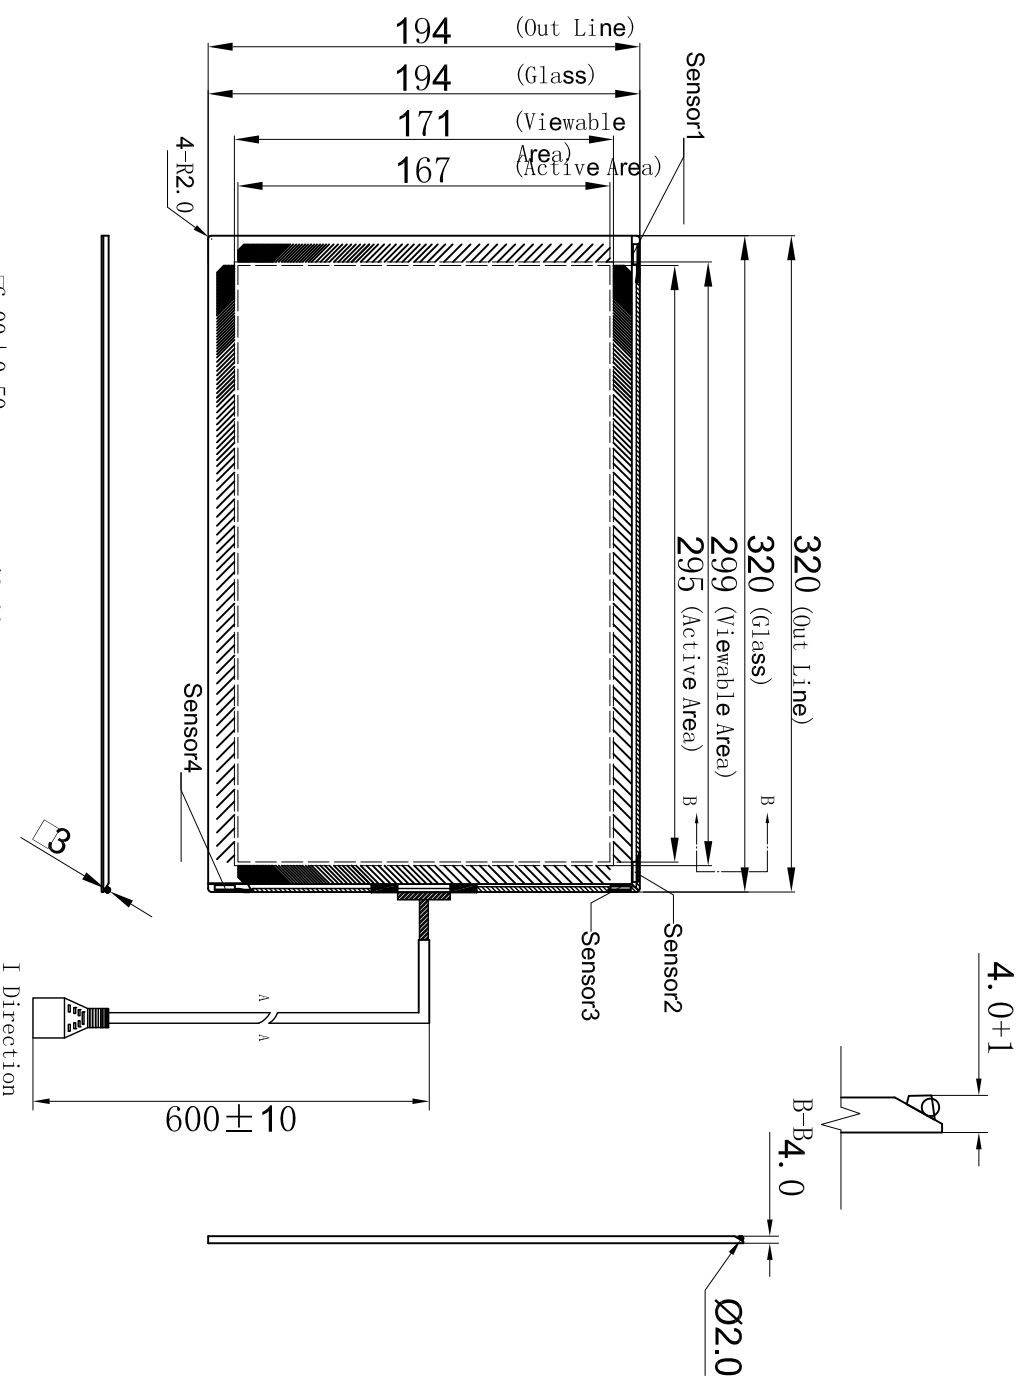

Unmarked Tolerance		Quality Level
From (mm)	to (mm)	
0	10	±0.05
10	50	±0.10
50	100	±0.15
100	200	±0.20

SAW screen specs				Product			
mark	Content of Amendment	Edtion	Author	Date	sign	weight	Scale
Design		standard			40		Free
Drawing		process			Total X 1 P X 1 P		
Check		Approve			Drawing No.		

Chintech
Dongguan Chintech Electronic co., Ltd.

Product
CTB133C-4K-STTGH