
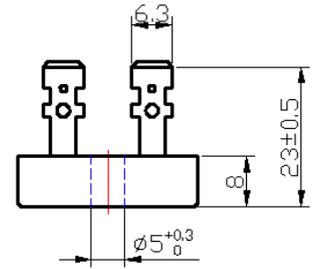


Feature

- 6.3mm standard pin
- Low forward voltage drop
- Isolation voltage 2500V ~
- UL registered E304417


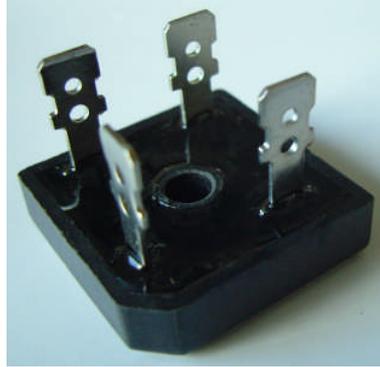


Application

- Power supply for DC power device
- Input rectifier for PWM convertor
- Power supply for DC device

Advantage

- Easy mounting
- Small volume, light weight
- Low thermal resistance
high heat-conduction rate
Low temperature rise

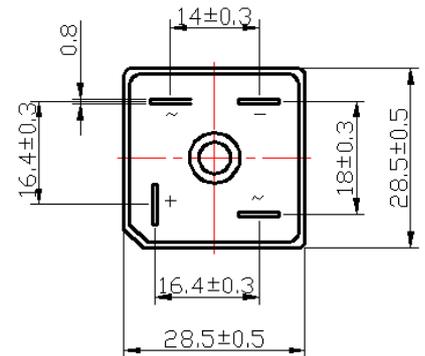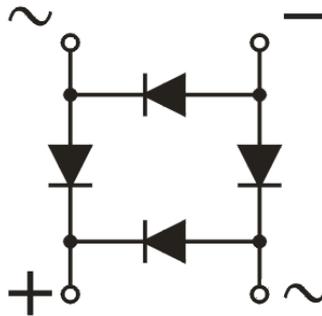

Maximum value

| Symbol | Parameter | Rating | | | | Unit |
|-----------|-------------------------------------|--------|--------|--------|--------|------|
| | | BR3504 | BR3506 | BR3508 | BR3510 | |
| V_{RRM} | Peak reverse repetitive voltage | 400 | 600 | 800 | 1000 | V |
| V_{RSM} | Peak reverse non-repetitive voltage | 500 | 700 | 900 | 1100 | V |

| Symbol | Parameter | Test condition | Rating | Unit |
|-------------|--------------------------------|--|-------------|----------------------|
| $I_{F(AV)}$ | Forward average current | 180° sine half-wave 50HZ single-sided heat dissipation, $T_C=55^\circ\text{C}$ | 35 | A |
| I_{FSM} | Forward surge current | $t=10\text{ms}, 50\text{HZ}, \text{sin}, T_{jm}$ | 400 | A |
| I^2t | I^2t value | | 660 | A^2S |
| V_{ISO} | Isolation voltage | AC one minute | 2500 | V |
| T_j | Operating junction temperature | | -40 to +150 | $^\circ\text{C}$ |
| T_{jm} | Rated junction temperature | | 150 | $^\circ\text{C}$ |
| T_{stg} | Storage temperature | | -40 to +125 | $^\circ\text{C}$ |
| M_d | Mounting torque M5 | | 2 | N-m |
| W_t | Weight | | 21 | g |

Electrical characteristics

| Symbol | Parameter | Test condition | Rating | Unit |
|---------------|-----------------------------------|---|--------|--------------------|
| I_{RRM} | Peak reverse repetitive current | $V_R=V_{RRM}$, sine half-wave, $T_j=25^\circ\text{C}$ | 5 | μA |
| | | $V_R=V_{RRM}$, sine half-wave, $T_j=150^\circ\text{C}$ | 500 | μA |
| V_{FM} | Peak forward voltage | $I_{FM}=17.5\text{A}, T_j=25^\circ\text{C}$ | 1.1 | V |
| $R_{th(j-c)}$ | Thermal impedance (junction-case) | Single-sided heat dissipation, sine half-wave | 1.4 | $^\circ\text{C/W}$ |

Single-phase Bridge Rectifier BR3504 thru BR3510

