



Product Data Sheet




Customer :	
Model No. :	NTM270 Series

Records of Revision			
Vision	Modifying	Old Description	New Description
v1510.2	Connectors		
v1511.1	Drawing		Revise dimension

Features :

- ★ Made in Taiwan
- ★ Full-HD 1920x1080
- ★ High Brightness Options : 300/600/1000 nits
- ★ Touchscreen options : I.R touch
- ★ Display Connector Options : VGA/DVI/HDMI/DP
- ★ Metal Enclosed Cabinet
- ★ Open-frame Brackets , Wall Mount Bracket , Desktop Stand
- ★ Splash Proof, Vandal Proof, AG/AR/AFP Options



Display Characteristics

Model No.	NTM270	Resolution	1920x1080 (FHD)
Screen Diagonal	27.0 inch	Brightness	Optional
Active Area	597.6x336.15 mm	Contrast Ratio	3000:1
Pixel Pitch	311.25x311.25 um	Viewing Angle (L/R)	178° (CR=10)
Support Color	16.7M Color	Viewing Angle (U/D)	178° (CR=10)
Display Ratio	16:9	Response Time	12 msec
Backlight Unit	LED	Surface Treatment	Anti-glare, Hardness 3H
Operating Temp.	0-50°C	Touch Screen	Optional

General Specification

Speaker	2Wx2	Power supply	External Adapter 12V/5A
Net Weight			

Display Input options.


Connectors	Model No.
(Standard) VGA+DVI	NTM270XXXXXXG
VGA+DVI+HDMI	NTM270XXXXXX7
VGA+HDMI+DP	NTM270XXXXXX3

Brightness Options

Brightness	Model No.
(Standard) 300nits	NTM270XXXXNXX
* 600 nits	NTM270XXXX6XX
** 1000nits	NTM270XXXXAXX

* Panel Specification will be modified, please ask for the Data Sheet.


** Sunlight Readable

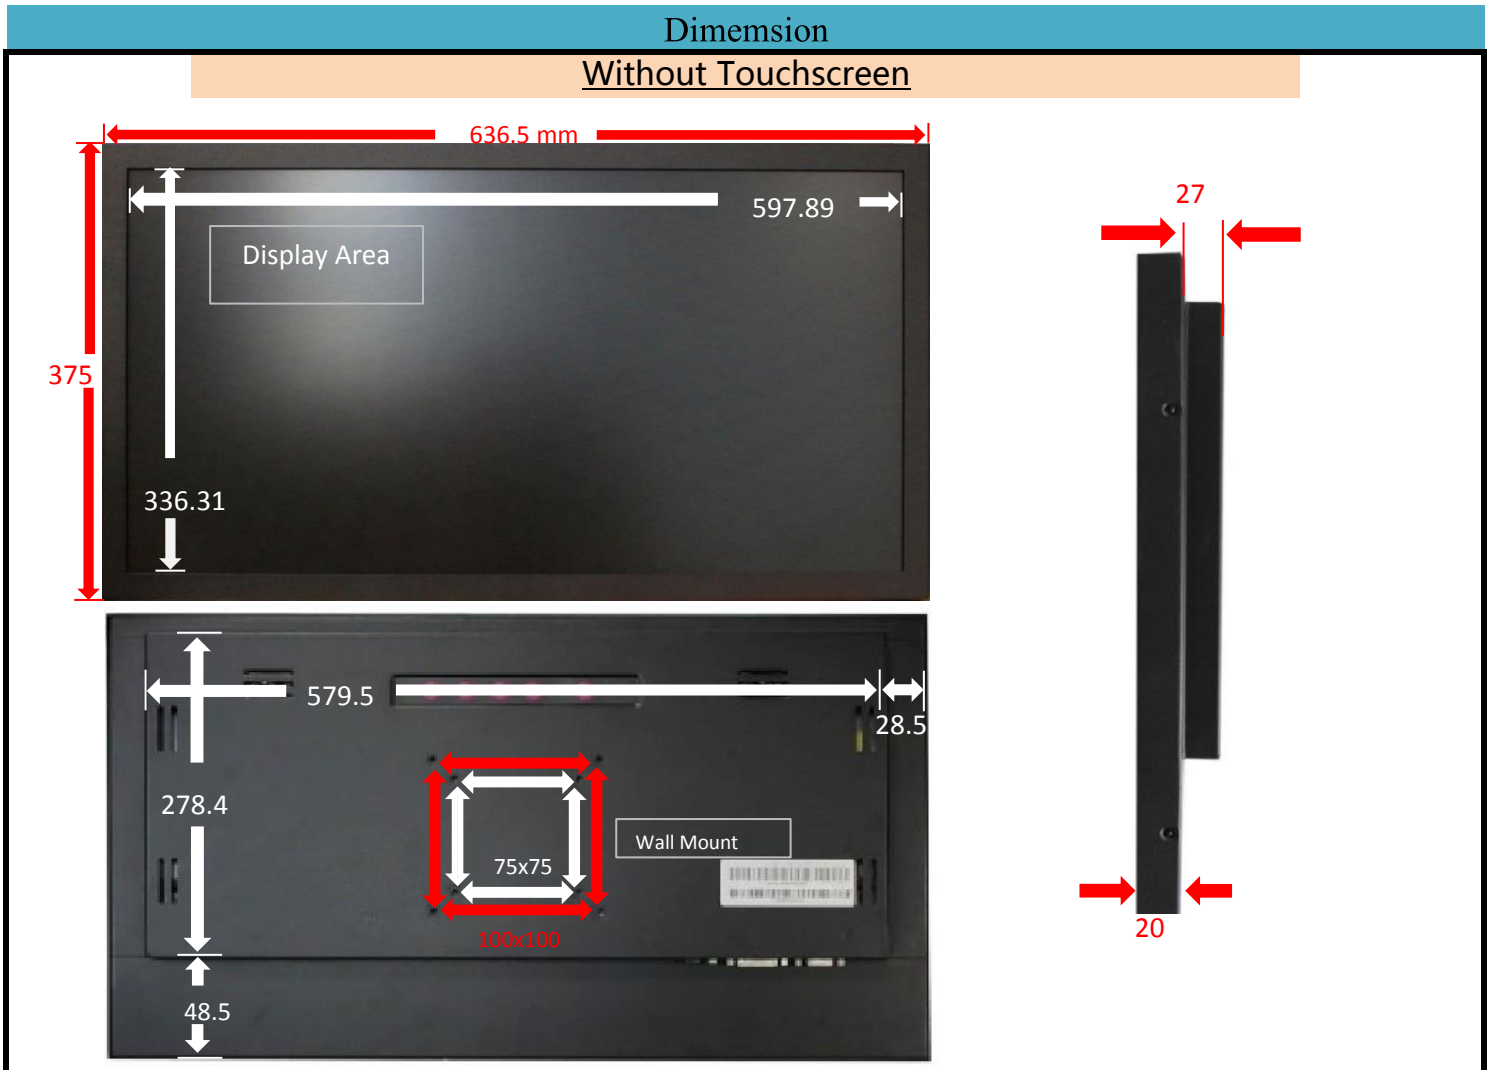

Accessories

VGA (D-sub 15pin) 1.2M x1
Audio cable (earphone jack 3.5mm) 1.2M x1
5A/12V AC-DC adapter x1
Power cord x1 **(depends on Area)
USB cable 1.5M x1 ** (only for touch monitor)
USB signal repeater x1 ** (only for touch monitor)

Coding Rule

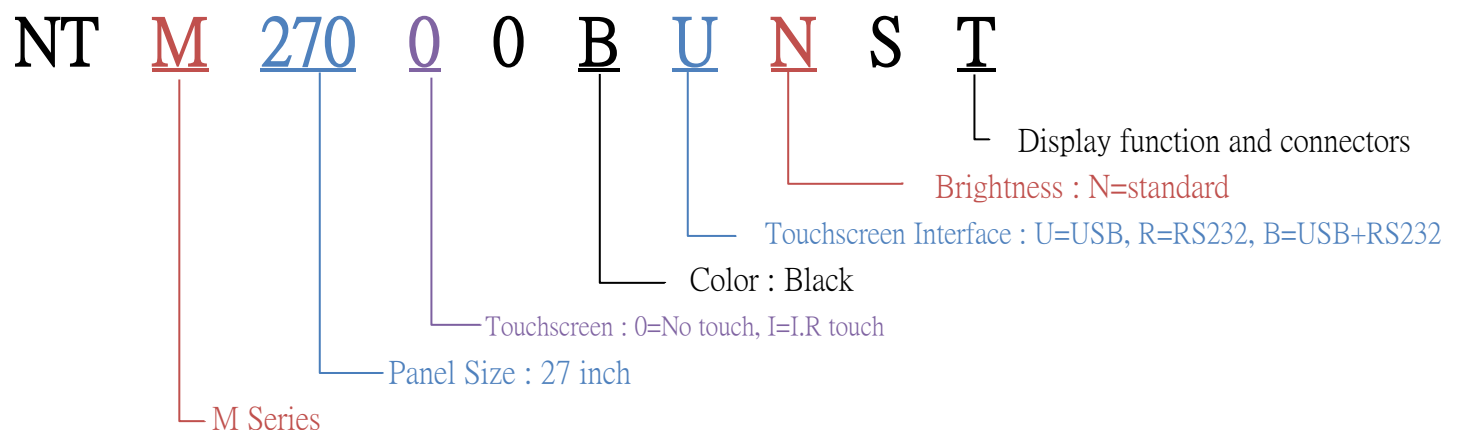



Touchscreen Specification

Type	I.R		
Allowed touch points	6 points	Touch Accuracy	<2mm, no drift
Tempered Glass Treatm	Hardness 7H, AG	Sensed Size	≥5 mm
Report Resolution	32768x32768	Interface	USB

Touchscreen Specification (Optional)


Type	Model No.
No touch	NTM270XXXXXX
I.R touch	NTM270IXXXXXX

Other Customization Options


Surface Film : AG , AR , AFP Film	Color : Any Color (requires MOQ 100+)
Splash Proof : IP 65 Compliant Front Panel	

Carton

Desktop Stand (Optional)

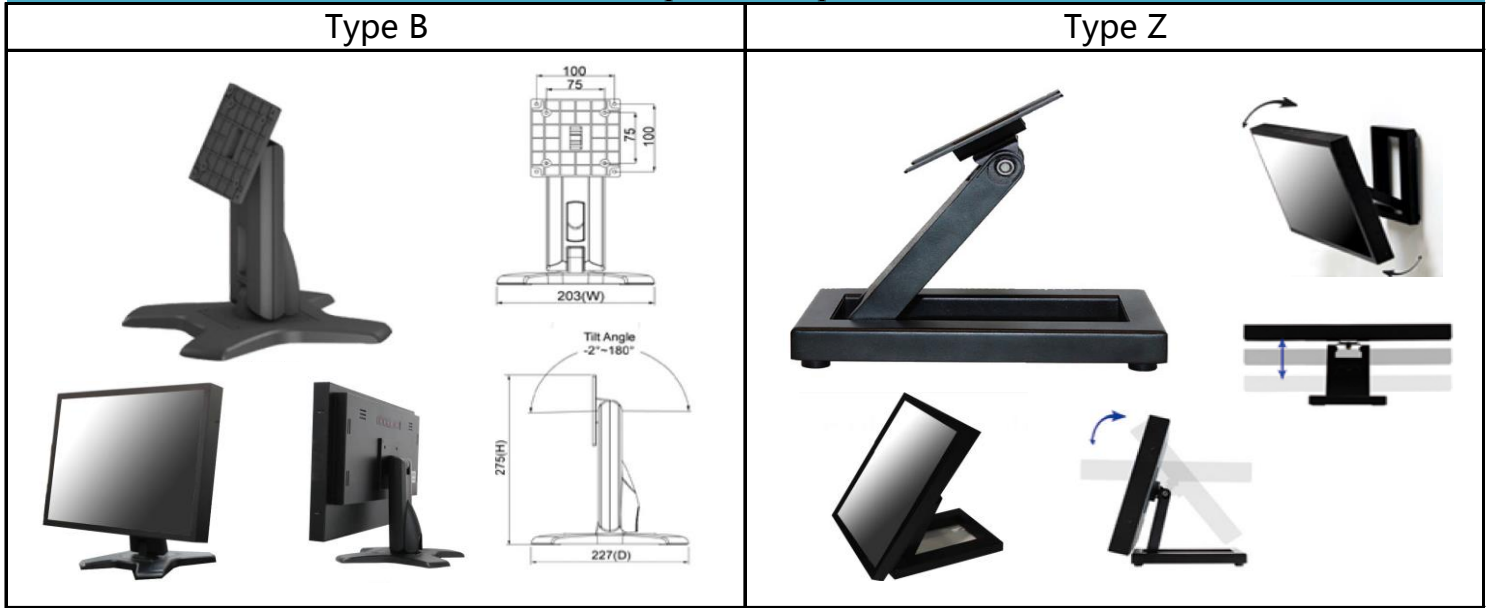

Open-frame Brackets (Optional)

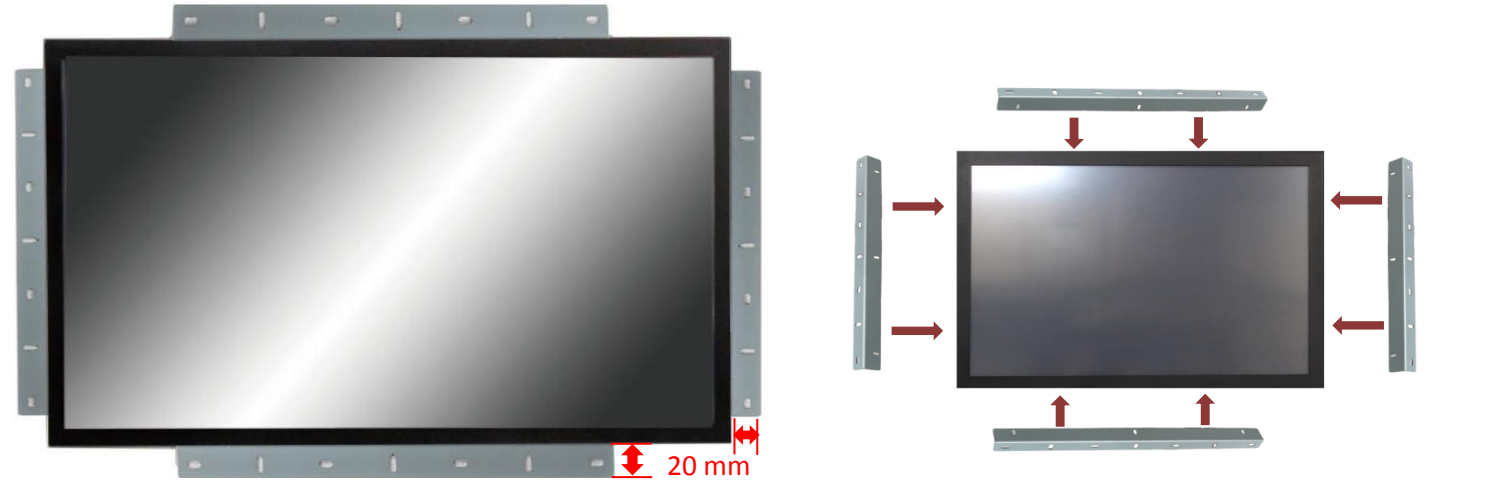

Panel Mounted Bezel (customized option)

