

DIM. A = 2.50 X No. of Spaces  
 DIM. B = DIM. A + 5.00  
 DIM. C = DIM. A + 3.60

\* Available in 2 through 15 Circuits


Material:

- \* Material: Nylon 46 UL 94V-0  
Color Ivory
- \* Contact: Brass, round pins

Ordering Code:

CI25 \*\* P 1 H 00 -LF  
 ① ② ③ ④ ⑤ ⑥ ⑦

- ① Series No.
- ② No. of Circuits
- ③ Contact type: P= Pin header
- ④ Plating option:  
1 = 3.05µm(120µ")Matte Tin  
over 0.76µm(30µ") Nickel
- ⑤ Tail Style: H= Right Angle
- ⑥ Option: 00= UL 94V-0(Standard)
- ⑦ LF= For Lead Free IR Processes

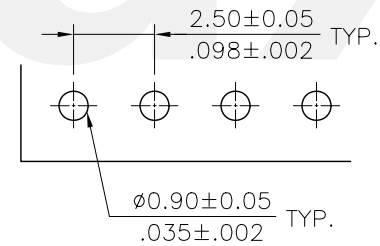

Recommended P.C. Board Layout

RoHS Compliant

4						DATE	UNIT: mm / inch	TITLE: 2.50MM(.098") RIGHT ANGLE HEADERS	 瀚荃股份有限公司 CviLux Corporation	
3			DRAWN BY: Jim		08/17-06'	TOLERANCE UNLESS OTHERWISE SPECIFIED		MATERIAL:		
2			ENGINEER: Eisley		08/24-06'	.X ± 0.30/.012 X' ± 1'				
1			CHECKED BY: David		08/24-06'	.XX ± 0.20/.010 .X' ±		FINISH:		
SYM	NAME	DATE	REVISIONS		APPROVED BY: David	08/24-06'	.XXX ± 0.10/0.04 .XX' ±		DRAWING NO. CI2517SA	PART NO. CI25**P1H00-LF
									SCALE 3 / 1	SHEET 1 OF 1