

IP65 Protected 15.6" Stainless Steel Wide Screen Monitor with P-Cap Touchscreen



Features

- IP65 Protected Stainless steel Flat Panel Design
- 15.6" HD LCD Panel up to 1366 x 768 Resolution
- Multi Video Input, Display Port, HDMI and VGA
- 12-24 V DC Power Input with Terminal Block
- IP65 Front USB input
- -20~60° C Operating Temperature
- Panel and VESA Mounting

Applications

- Food & Beverage Processing Industrial
- Pharmaceutical and Biopharmaceutical Equipment
- Embedded HMI Display System Factory
- Manufacturing Automation
- Chemical, Gas & Oil Critical Environment

→ Packing List

Description
1 x TPM-3315PW
1 x Driver CD
1 x USB Cable
1 x VGA Cable
1 x Power Adapter
12 x Panel Mounting Screws

→ Optional Items


Part No.	Description
ACS-PS-US	Power Cable 3-pin, 180 cm, USA Type
ACS-PS-EU	Power Cable 3-pin, 180 cm, Euro Type
ACS-PS-CN	Power Cable 3-pin, 180 cm, China Type
ACS-100-STD	LCD VESA Table Stand

→ Ordering Information

Part No.	Description
TPM-3315PW-A1	15.6" HD 1366 x 768, IP65 Stainless Flat Panel, Projected Capacitive Multi-touch Display

TPM-3315PW

→ Dimensions

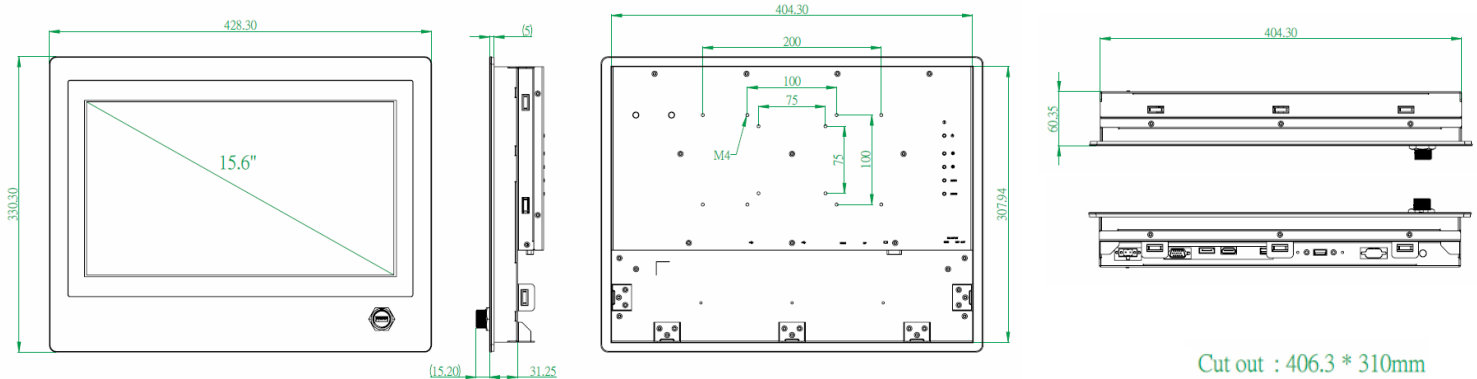

→ Specifications

Model		TPM-3315PW
Display	Panel Size	15.6" LCD Panel
	Resolution	1366 x 768 (HD)
	Viewing Angle	80 x 80 (H) x 80 x 80 (V)
	Brightness	300 (cd/m2)
	Color Support	16.7 M
	Contrast Ratio	500 : 1
	Response Time	8 (msec)
Touchscreen	Type	Projected Capacitive
	Surface Hardness	7 Mohs
	Durability	-
	Transparency	90% (±3%)
I/O Interface	Input & Video Interface	Front IP65 USB input, 1 Display Port, 1 HDMI, 1 VGA,
	Touch Interface	USB interface
OSD Control	Function Key	5 Keys: Menu, Up, Down, Auto Adjust, Monitor Power on/off Menu Functions: Brightness, Contrast, Color Adjust, Color Temp, Auto Color, Language
Power	Power Connector	Phoenix Terminal Block, 2 pins
	Power Input	12-24 V DC power input, single power source
	Power Consumption (Typical)	10.1 W
Environment	Operating Temperature	-20~60° C (-4~140° F)
	Storage Temperature	-30~70° C (-22~158° F)
	Humidity	5~95% @ 40° C, Non-condensing
	Vibration	5-500 Hz, 0.026 G ² /Hz, 2.16 Grms, X, Y, Z, 1 hour per axis
General	Ingress Protection	Stainless Steel, Front Cover IP65 Protection
	Dimensions (W x H x D)	428.3 x 330.3 x 60.35 mm (16.86" x 13.00" x 2.38")
	Weight	kg (lb)
	Operating System	Windows 7/8.1/10, WES7-E WES7-P, WE8S, Linux Fedora, Ubuntu