

SR220-SR2A0

2.0 AMP Schottky Barrier Rectifiers

VOLTAGE RANGE: 20 --- 100 V
CURRENT: 2.0 A




Features

- ✧ Metal-Semiconductor junction with guard ring
- ✧ Epitaxial construction
- ✧ Low forward voltage drop, low switching losses
- ✧ High surge capability
- ✧ For use in low voltage, high frequency inverters free wheeling, and polarity protection applications
- ✧ The plastic material carries U/L recognition 94V-0

Mechanical Data

- ✧ Case: JEDEC DO-15, molded plastic
- ✧ Terminals: Axial lead, solderable per MIL-STD-750, Method 2026
- ✧ Polarity: Color band denotes cathode
- ✧ Weight: 0.014 ounces, 0.39 grams
- ✧ Mounting position: Any

DO-15

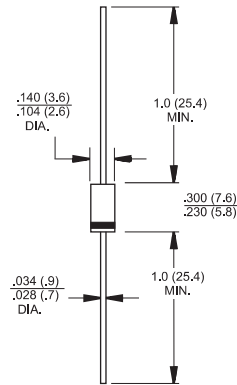

Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60 Hz, resistive or inductive load. For capacitive load, derate by 20%.

		SR220	SR230	SR240	SR250	SR260	SR280	SR2A0	UNITS
Maximum recurrent peak reverse voltage	V_{RRM}	20	30	40	50	60	80	100	V
Maximum RMS voltage	V_{RMS}	14	21	28	35	42	56	70	V
Maximum DC blocking voltage	V_{DC}	20	30	40	50	60	80	100	V
Maximum average forward rectified current 9.5mm lead length, @ $T_A=75^\circ\text{C}$	$I_{F(AV)}$	2.0							A
Peak forward surge current 8.3ms single half-sine-wave superimposed on rated load @ $T_J=125^\circ\text{C}$	I_{FSM}	50.0							A
Maximum instantaneous forward voltage @ 2.0A (Note 1)	V_F	0.55			0.7		0.85		V
Maximum reverse current @ $T_A=25^\circ\text{C}$ at rated DC blocking voltage @ $T_A=100^\circ\text{C}$	I_R	1.0 10.0							mA
Typical junction capacitance (Note 2)	C_J	170							pF
Typical thermal resistance (Note 3)	$R_{\theta JA}$	35							$^\circ\text{C/W}$
Operating junction temperature range	T_J	- 55 ---- + 125							$^\circ\text{C}$
Storage temperature range	T_{STG}	- 55 ---- + 150							$^\circ\text{C}$

NOTE: 1. Pulse test: 300us pulse width, 1% duty cycle.

2. Measured at 1.0MHz and applied reverse voltage of 4.0V DC.

3. Thermal resistance junction to ambient

Ratings AND Characteristic Curves

FIG.1 -- FORWARD CURRENT DERATING CURVE

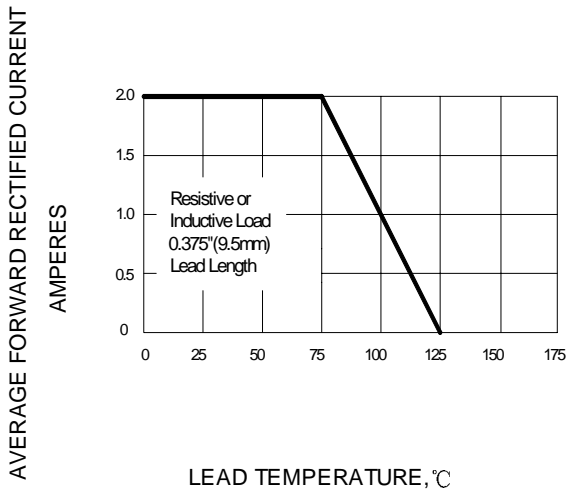


FIG.2 -- PEAK FORWARD SURGE CURRENT

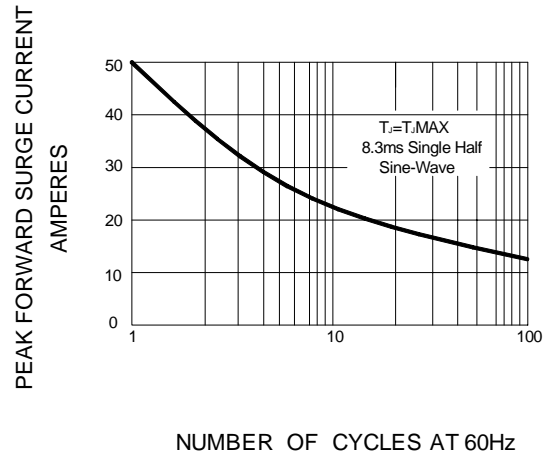


FIG.3 -- TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

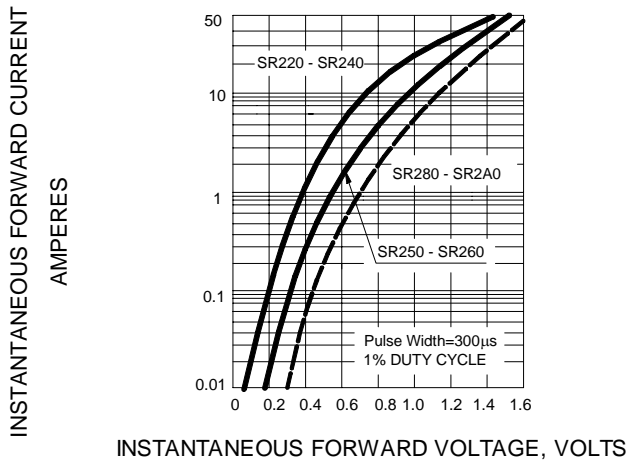


FIG.4 -- TYPICAL JUNCTION CAPACITANCE

