


NA551

2U Rackmount Network Appliance Platform with LGA1155 Socket Intel® Xeon® E3 Family Processor, Intel® C216, Two 3.5" Hot-swappable HDD and up to 26 LANs

Features

- LGA1155 socket 3rd/2nd gen Intel® Xeon® E3 family processor
- Four DDR3-1333 U-DIMM, up to 32GB memory
- Max. up to twenty-six 10/100/1000 Mbps Ethernet ports
- Three expandable LAN modules supporting 1GbE/10GbE/Fiber/Copper/Bypass
- Supports 2U redundant power supply
- Suitable for VPN, network bandwidth controller and firewall applications

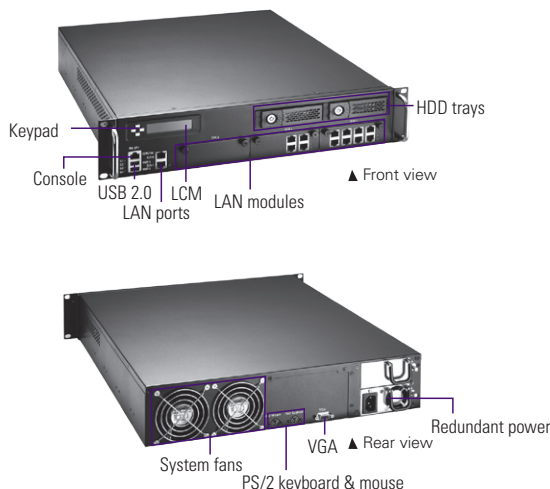

Specifications

System	
CPU	LGA1155 socket 3rd/2nd gen Intel® Xeon® E3 family processor
Chipset	Intel® C216
Memory	4 x DDR3-1333 U-DIMM, up to 32GB non-buffer non-ECC/ECC memory
BIOS	AMI SPI Flash BIOS
Storage	2 x 3.5" SATA HDD hot swappable 1 x CFast™
Network Interface	14 x 10/100/1000 Mbps Ethernet 3 x LAN modules (optional), max. up to 26 LAN ports
I/O Interface	1 x RS-232 (RJ-type) 2 x USB 2.0 14 x RJ-45 1 x VGA 1 x PS/2 keyboard/mouse
Other Features	LAN Bypass function through latch relay (depend on LAN modules)
Expansion slot	1 x PCIe Mini (32-bit/33 MHz)
Watchdog Timer	255 stepping for system reset 8 stepping for LAN Bypass
Power Supply	300 W 2U redundant power supply
OS Compatibility	Linux Kernel 2.6

Mechanical/ Environmental

Form Factor	2U rackmount
LED	Power, HDD, GPIO programmable, LAN Bypass, Link/Act with transfer rate
Operating Temp.	0°C ~ +45°C (+32°F ~ +113°F)
Humidity	10% ~ 95% RH, non-condensing
Chassis Material	Steel
Dimensions	88 mm (3.46") (H) x 427.8mm (16.92") (W) x 500 mm (19.68") (D)
Weight (net/gross)	14.52 kg (32.01 lb)/21.61 kg (47.64 lb)
Certificates	FCC class A/CE class A

Ordering Information

Standard	
NA551-REGI-RC-US (P/N: E26E551100)	2U rackmount network appliance with LGA1155 3rd/2nd gen Intel® Core™ processor, PSU 1+0 and 14 GbE LANs (AX93306-4GIL & AX93306-8GIL)
NA551-R2GI-RC-US (P/N: E26E551101)	2U rackmount network appliance with LGA1155 3rd/2nd gen Intel® Core™ processor, PSU 1+0 and 2 GbE LANs
NA551-R2GI-RC-US (P/N: E26E551102)	2U rackmount network appliance with LGA1155 3rd/2nd gen Intel® Core™ processor, PSU 1+1 and 2 GbE LANs

Optional


5916E552000E	DB9F-RJ-45 1.8M console cable for Cisco
--------------	---

* Specifications and certifications may vary contingent on options.

Packing List

1 x SATA cable
1 x Power cord
2 x HDD tray (w/ key)
1 x DB9F to RJ-45 1.8M console cable

Dimensions

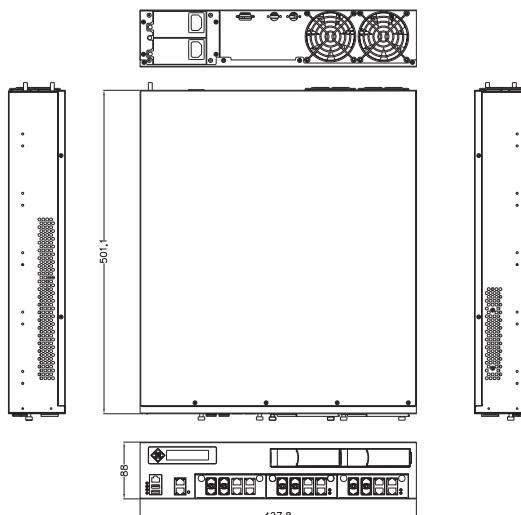

Updated Dec. 27, 2017. * All specifications and photos are subject to change without notice.